

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

## **40V, 1.7A, Boost for 10 White LED Driver**


### ❖ GENERAL DESCRIPTION

The AX2016 is a step-up converter designed for driving up to 10 series white LEDs for backlighting application. The AX2016 uses current mode, 1MHz fixed frequency architecture to regulate the LED current, which is set through an external current sense resistor. Its low 300mV/250mV/200mV feedback voltage reduces power loss and improves efficiency. The OV pin monitors the output voltage and turns off the converter if an over-voltage condition is present due to an open circuit condition. The AX2016 includes under-voltage lockout, current limiting and thermal shutdown protection preventing damage in the event of an output overload. The driver is available in small 6-pin SOT-23 package.

### ❖ FEATURES


- 2.5V to 5.5V operating input voltage range
- Drives up to 10 series White LEDs
- 1MHz Fixed Switching Frequency
- Wide range for PWM dimming (200Hz to 200KHz)
- Internal 1.7A switching current limit
- Over Voltage Protection (OVP)
- Internal Soft-start Function
- Current limit and Thermal shutdown protection
- Under voltage Lockout
- Available in the 6-pin SOT-23 Package

❖ BLOCK DIAGRAM

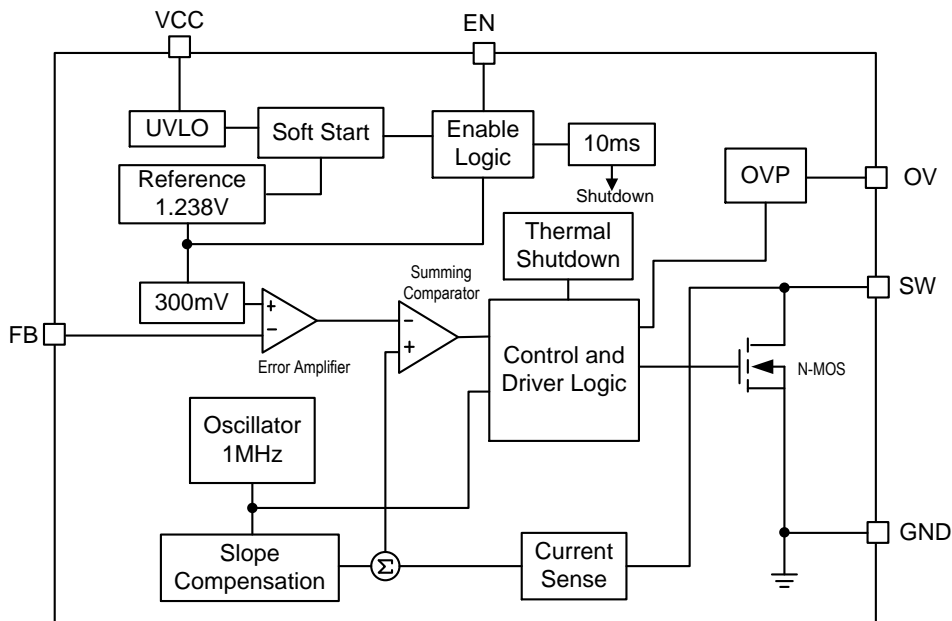

❖ PIN ASSIGNMENT

The package of AX2016 is SOT-23-6L; the pin assignment is given by:

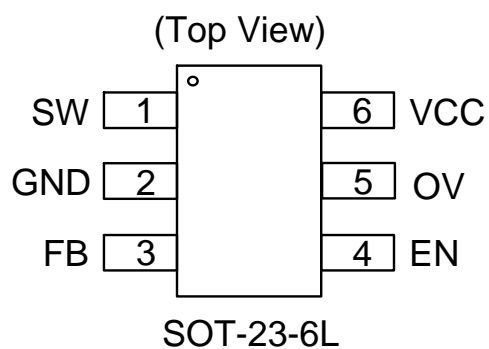

Name	Description
SW	Switch Output Pin
GND	Ground Pin
FB	Feedback Pin; Put a Resistor to GND to Setting the Current
EN	Enable with Dimming Pin; Internal Floating; Logic High Active
OV	OVP Sense Pin
VCC	Power Input Pin

❖ **ORDER/MARKING INFORMATION**

Order Information	Top Marking
<p><b>AX2016 XX X</b></p> <pre>               +-----+-----+   Package Type   Packing               C: SOT-23-6L  Blank : Bag                         A : Taping                        </pre>	<p><b>J M Y W X</b> → ID Code: Internal</p> <p>Week: 01~26(A~Z) 27~52(a~z)</p> <p>Year : A = 2010 1 = 2011 2 = 2012 ⋮ 9 = 2019</p> <p>AX2016</p>

❖ **ABSOLUTE MAXIMUM RATINGS** (at  $T_A=25^{\circ}\text{C}$ )

Characteristics	Symbol	Rating	Unit
V <sub>CC</sub> Pin Voltage	V <sub>CC</sub>	-0.3 to 6	V
SW Pin Voltage	V <sub>SW</sub>	-0.3 to 45	V
OV Pin Voltage	V <sub>OV</sub>	-0.3 to 45	V
EN, FB Pin Voltage		-0.3 to 6	V
Power Dissipation	PD	$(T_J - T_A) / \theta_{JA}$	mW
Storage Temperature Range	T <sub>ST</sub>	-65 to +150	°C
Operating Junction Temperature Range	T <sub>OP</sub>	-40 to +125	°C
Thermal Resistance from Junction to case	$\theta_{JC}$	130	°C/W
Thermal Resistance from Junction to ambient	$\theta_{JA}$	250	°C/W

Note:  $\theta_{JA}$  is measured with the PCB copper area of approximately 1 in<sup>2</sup> (Multi-layer).

**❖ ELECTRICAL CHARACTERISTICS**


 ( $V_{CC}=5V$ ,  $I_{OUT} = 20mA$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted)

Characteristics		Symbol	Conditions	Min	Typ	Max	Units
Input Voltage Range		$V_{CC}$		2.5	-	5.5	V
Step-Up Voltage Range		$V_{OUT}$		3	-	40	V
OV Sense Voltage		$V_{OV}$			38		V
Under Voltage Lockout		$U_{VLO}$	Rising	-	2.2	2.4	V
UVLO Hysteresis				-	100	-	mV
Feedback Voltage		$V_{FB}$		285	300	315	mV
EN Threshold	Logic-High Voltage	$V_{IH}$		2.0	-	-	V
	Logic-Low Voltage	$V_{IL}$		-	-	0.4	V
EN Hysteresis				-	200	-	mV
Operating Quiescent Current		$I_{CCQ}$	$I_{OUT}= 0mA$ , $V_{FB} =0.5V$	-	300	500	$\mu A$
Shutdown Current		$I_{SD}$	$V_{EN}=0V$ , $t_{EN} > 20ms$	-	1	4	$\mu A$
N-Channel MOSFET Current Limit (Note1)		$I_{LIM}$	Duty=50%		1.7	-	A
MOSFET On-Resistance (Note1)		$R_{DS(on)}$		-	0.6	1.0	$\Omega$
Maximum Duty Cycle		$D_{MAX}$		-	88	-	%
Line Regulation			$V_{CC} = 3V$ to $5V$	-	1	-	%
Switching Frequency		$F_{OSC}$		0.75	1	1.25	MHz
Dimming Clock Rate		$F_{DIM}$		0.2	-	200	KHz
FB Input Leakage Current		$I_{FB-LKG}$	$V_{FB} = 0.5V$	-	0.01	100	nA
SW Leakage Current		$I_{SWL}$	$V_{LX} = 30V$ , $V_{FB} =0.5V$	-	-	1	$\mu A$
EN Input Leakage Current		$I_{EN-LKG1}$	$V_{EN}= V_{CC}$	-	1.5	3	$\mu A$
		$I_{EN-LKG2}$	$V_{EN}= GND$	-	-	1	$\mu A$
Shutdown Delay		$T_{SHDN}$		-	10	-	mS
Thermal Shutdown		$T_{SD}$		-	160	-	$^{\circ}C$
Thermal Shutdown Hysteresis		$T_{SH}$		-	30	-	

Note1: Guaranteed by design.

❖ APPLICATION CIRCUIT


(1) 10 series LED application

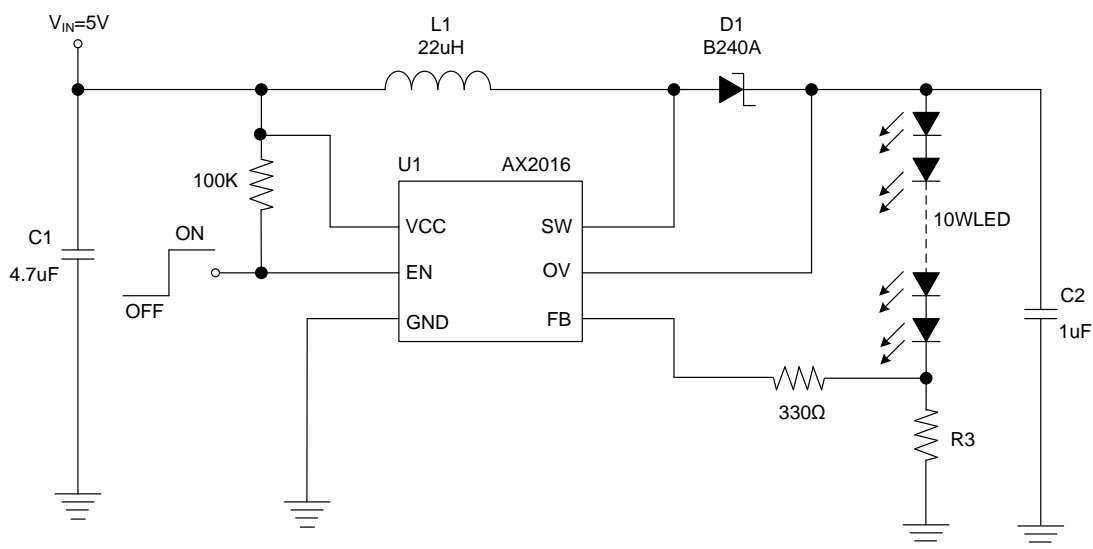

$$I_{LED} = V_{FB} / R_3, V_{FB} = 300\text{mV (AX2016)}$$

$$V_{FB} = 200\text{mV (AX2016A)}$$

(2) LED Dimming application

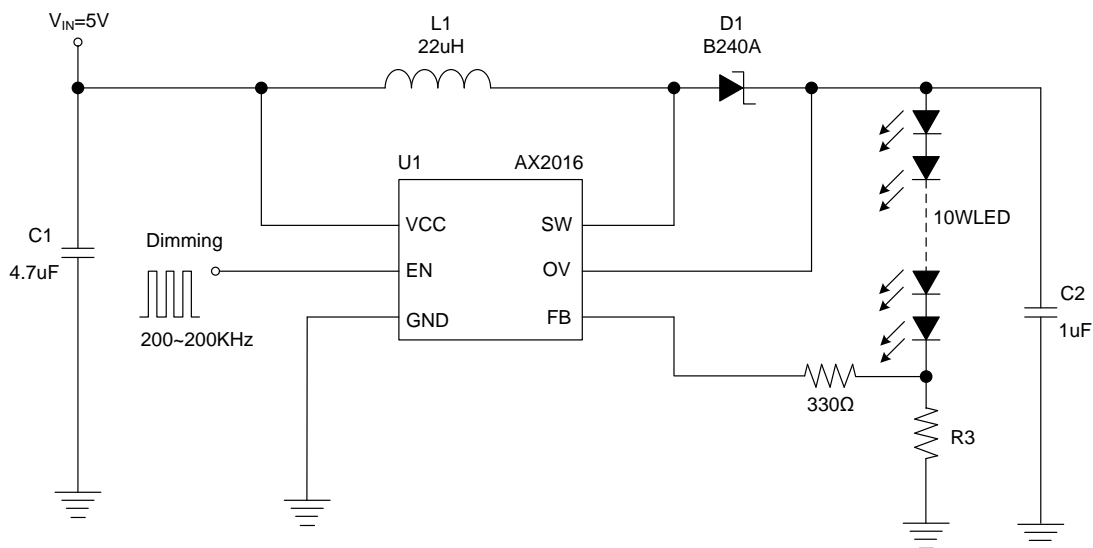

$$I_{LED} = V_{FB} / R_3, V_{FB} = 300\text{mV (AX2016)}$$

$$V_{FB} = 200\text{mV (AX2016A)}$$

❖ **APPLICATION INFORMATION**

**Setting the I<sub>LED</sub> Current**

Application circuit item shows the basic application circuit with AX2016 adjustable output version. The external resistor sets the LED output current according to the following equation:

$$I_{LED} = (V_{FB} / R3)$$

Part No.	I <sub>LED</sub>	R3	
AX2016	20mA	15Ω	6mW
	350mA	0.857Ω	105mW

**Over Voltage Protection**

The Over Voltage Protection is detected by a junction breakdown detecting circuit. Once V<sub>OUT</sub> goes over the detecting voltage, SW pin stops switching and the power N-MOSFET will be turned off. Then, the V<sub>OUT</sub> will be clamped to be near V<sub>OVP</sub>.

**Under Voltage Lockout (UVLO)**

To avoid mis-operation of the device at low input voltages an under voltage lockout is included that disables the device, if the input voltage falls below (2.25V-100mV).

**Input Capacitor Selection**


The input capacitor reduces the surge current drawn from the input and switching noise from the device. The input capacitor impedance at the switching frequency shall be less than input source impedance to prevent high frequency switching current passing to the input. A low ESR input capacitor sized for maximum RMS current must be used. Ceramic capacitors with X5R or X7R dielectrics are highly recommended because of their low ESR and small temperature coefficients. A 4.7μF ceramic capacitor for most applications is sufficient. For a lower output power requirement application, this value can be decreased.

**Output Capacitor Selection**


The output capacitor is required to keep the output voltage ripple small and to ensure regulation loop stability. The output capacitor must have low impedance at the switching frequency. Ceramic capacitors with X5R or X7R dielectrics are recommended due to their low ESR and high ripple current. A 1uF ceramic capacitors works for most of the applications. Higher capacitor values can be used to improve the load transient response.

❖ TYPICAL CHARACTERISTICS


Efficiency vs. Output Current

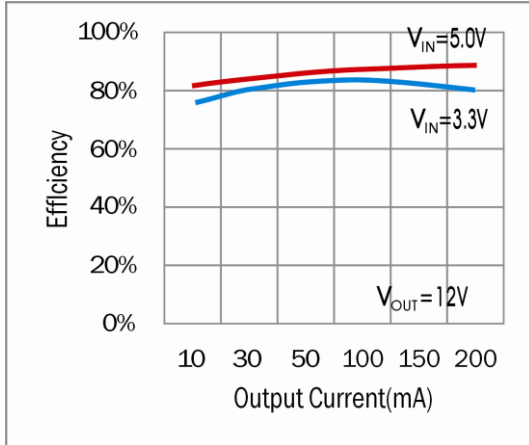


Efficiency vs. Input Voltage

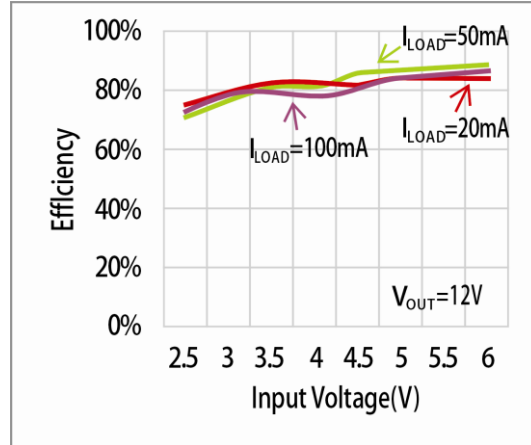


Output Voltage vs. Output Current

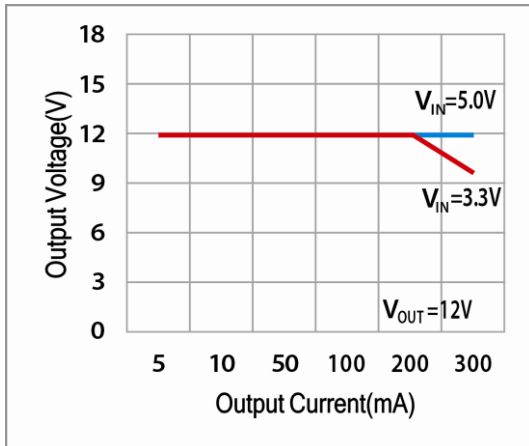


Quiescent Current vs. Input Voltage

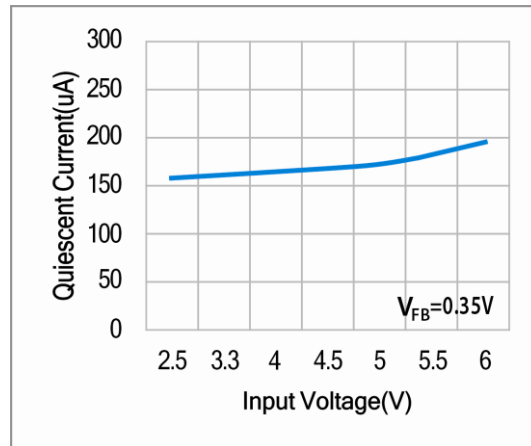

Frequency vs. Input Voltage

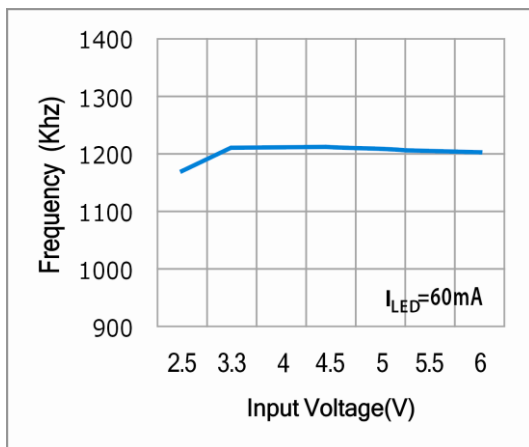


Frequency vs. Temperature

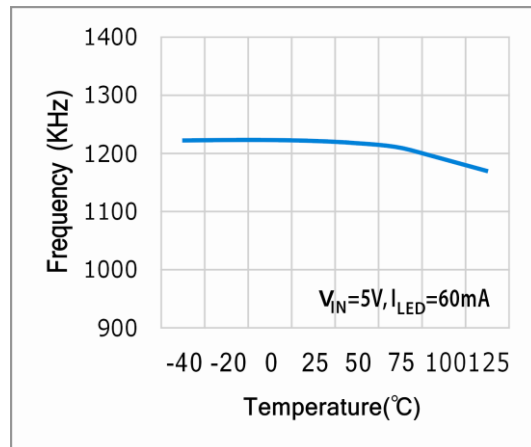




❖ TYPICAL CHARACTERISTICS (CONTINUOUS)


Reference Voltage vs. Input Voltage

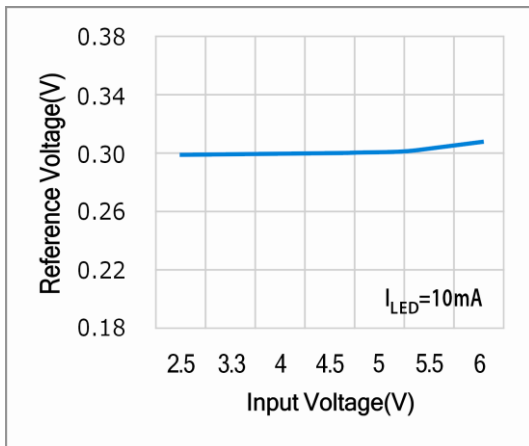


Reference Voltage vs. Temperature

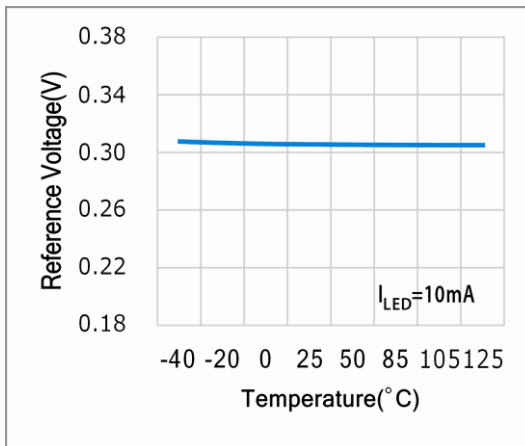

LED Current vs. Duty

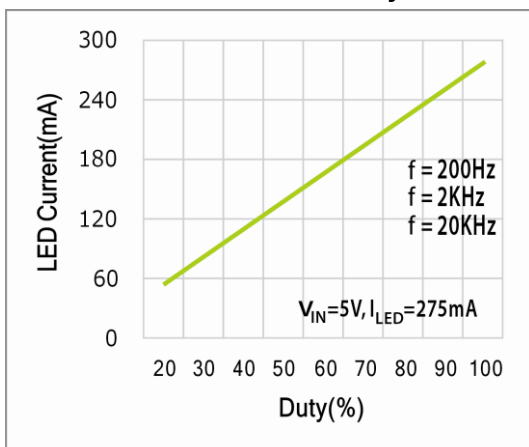


Enable Threshold vs. Input Voltage

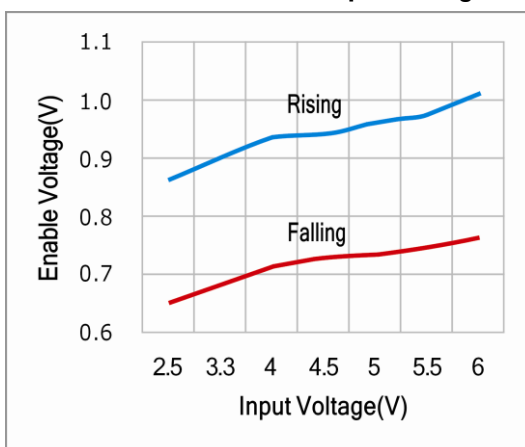


❖ TYPICAL CHARACTERISTICS (CONTINUOUS)


Power ON from  $V_{IN}$

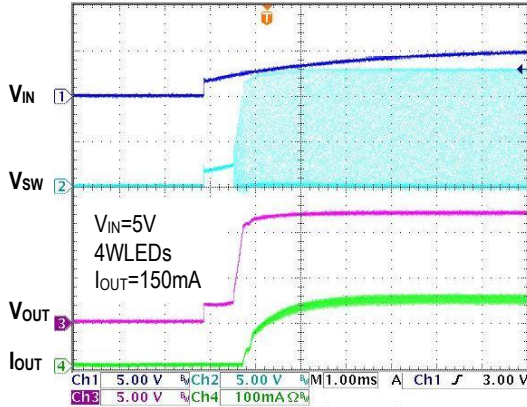


Power ON from EN

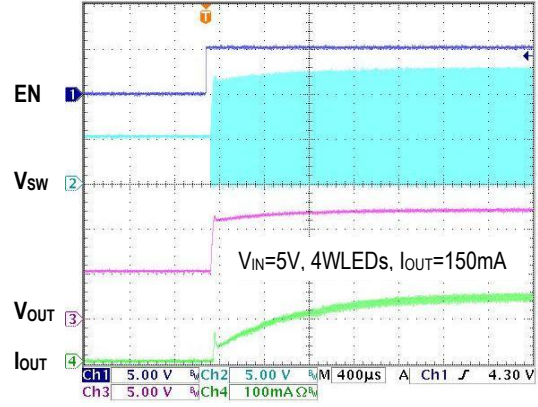

Steady State Operation

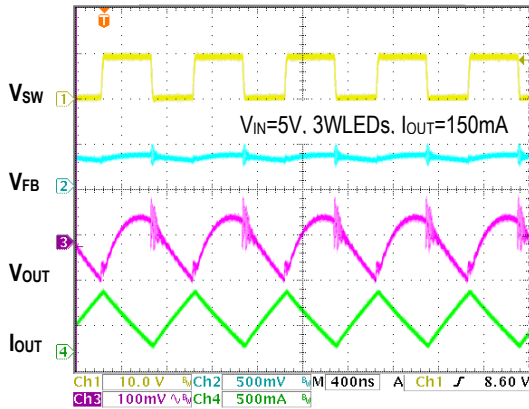


Normal Operation into OVP

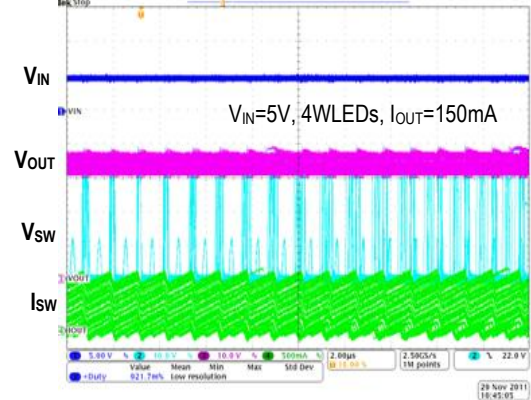


( $V_{OUT}$ ,  $I_{OUT}$ : measured by AC coupled mode)

PWM Dimming from EN (200Hz)

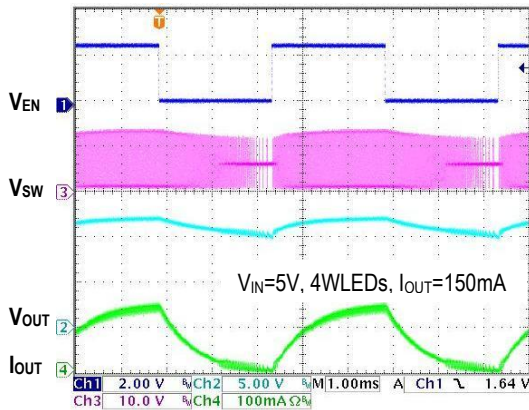


PWM Dimming from EN (20KHz)

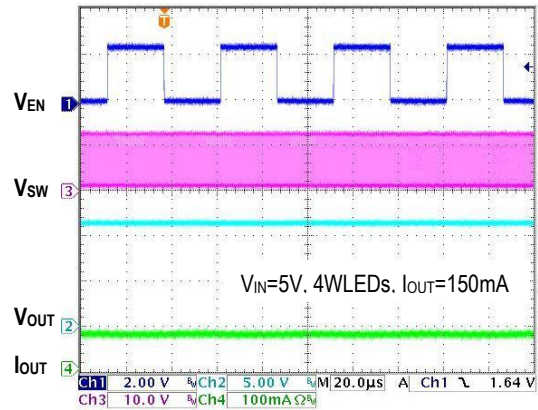

❖ PACKAGE OUTLINES

(1) SOT-23-6L

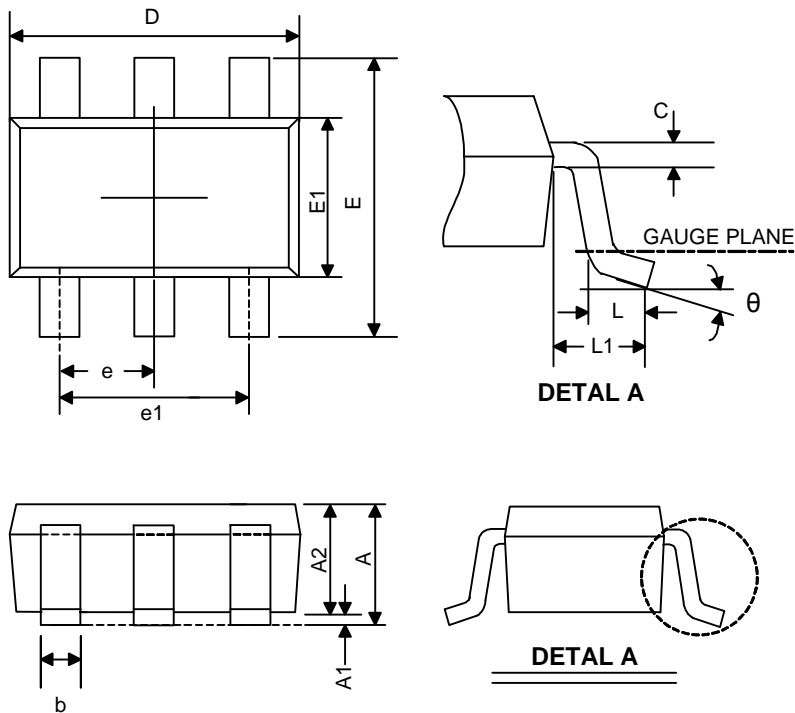

Symbol	Dimensions in Millimeters			Dimensions in Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	-	-	1.45	-	-	0.057
A1	0	-	0.15	0	0.003	0.006
A2	0.9	1.1	1.3	0.035	0.043	0.051
b	0.3	0.4	0.5	0.012	0.016	0.02
C	0.08	-	0.22	0.003	0.006	0.009
D	2.7	2.9	3.1	0.106	0.114	0.122
E1	1.4	1.6	1.8	0.055	0.063	0.071
E	2.6	2.8	3	0.102	0.11	0.118
L	0.3	0.45	0.6	0.012	0.018	0.024
L1	0.5	0.6	0.7	0.02	0.024	0.028
e1	1.9 BSC			0.075 BSC		
e	0.95 BSC			0.037 BSC		
θ	0°	4°	8°	0°	4°	8°

JEDEC outline: MO-178 AB