

阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Features

- STM32 microcontrollers in 32-pin packages
- Extension with Arduino™ nano connectivity
- ARM® mbed™-enabled (see <http://mbed.org>)
- On-board ST-LINK/V2-1 debugger/programmer with SWD connector:
 - Selection-mode switch to use the kit as a standalone ST-LINK/V2-1
 - USB re-enumeration capability. Three different interfaces supported on USB: virtual COM port, mass storage, debug port
- Flexible board power supply:
 - USB VBUS
 - External source
- Three LEDs:
 - USB communication (LD1), power LED (LD2), user LED (LD3)
- Reset push-button
- Supported by wide choice of Integrated Development Environments (IDEs) including IAR™, Keil®, GCC-based IDEs (AC6 SW4STM32, ...)

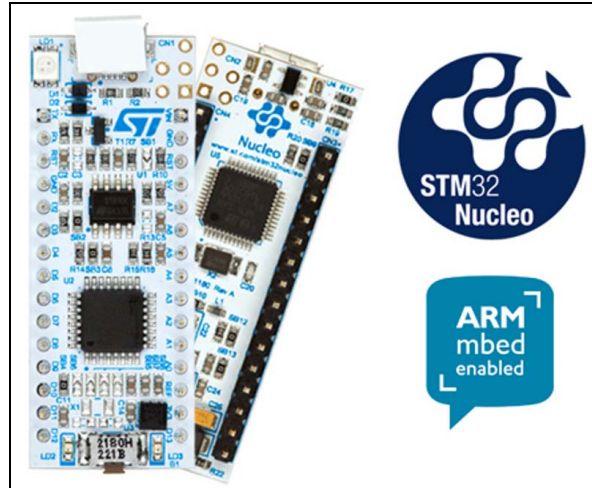

1. Picture not contractual

Description

The STM32 Nucleo-32 board provides an affordable and flexible way for users to try out new concepts and build prototypes with the STM32 microcontroller, choosing from the various combinations of performance, power consumption and features. The Arduino™ nano connectivity makes it easy to expand the functionality of the STM32 Nucleo open development platform with a choice of specialized shields. The STM32 Nucleo-32 board does not require any separate probe as it integrates the ST-LINK/V2-1 debugger/programmer and it comes with the STM32 comprehensive software HAL library, together with various packaged software examples, as well as direct access to the ARM® mbed™ on-line resources.

Table 1. Device summary

Reference	Part number
NUCLEO-XXXXKX	NUCLEO-F031K6, NUCLEO-F042K6, NUCLEO-F303K8, NUCLEO-L011K4, NUCLEO-L031K6, NUCLEO-L432KC.

1 Ordering information

[Table 2](#) lists the order codes and the respective targeted STM32.

Table 2. Ordering information

Order code	Targeted STM32
NUCLEO-F031K6	STM32F031K6T6
NUCLEO-F042K6	STM32F042K6T6
NUCLEO-F303K8	STM32F303K8T6
NUCLEO-L011K4	STM32L011K4T6
NUCLEO-L031K6	STM32L031K6T6
NUCLEO-L432KC	STM32L432KCU6

The meaning of NUCLEO-TXXXXY codification is as follows:

- TXXX describes the STM32 product line (T for F or L)
- K describes the pin count (K for 32 pins)
- Y describes the memory size (4 for 16 Kbytes, 6 for 32 Kbytes, 8 for 64 Kbytes, C for 256 Kbytes)

The order code is printed on a sticker, placed at the top or bottom side of the board.

2 Revision history

Table 3. Document revision history

Date	Revision	Changes
08-Sep-2015	1	Initial release.
15-Jan-2016	2	Updated Table 1: Device summary and Table 2: Ordering information .
09-Jun-2016	3	Updated Section : Description and Section 1: Ordering information to add NUCLEO-L432KC.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved