

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

8-bit, serial IN, parallel OUT driver

BA823 / BA823F

The BA823 and BA823F are 8-bit serial input, parallel output drivers. These monolithic ICs were developed as drivers for thermal printing heads, LED character displays, and other similar applications.


●Applications

Thermal printing head drivers
LED character display drivers

●Features

- 1) Can drive up to 200 mA.
- 2) Controlling the strobe terminal with the drive timing pulse enables current to be reduced when drive is not being carried out.
- 3) Using the data output terminal for the next data input enables cascade connections.
- 4) The digital ground and power ground are separated.
- 5) TTL and CMOS drive possible.

●Block diagram

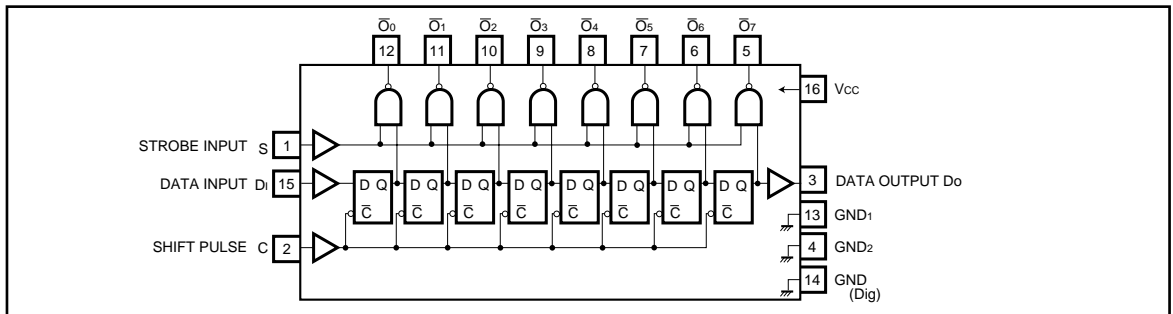

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V _{cc}	7.0*1	V
Power dissipation	BA823	550*2	mW
	BA823F		
Input voltage	V _{IN Max.}	+ 0.3 ~ + 6.0	V
Operating temperature	T _{opr}	- 20 ~ + 75	°C
Storage temperature	T _{stg}	- 55 ~ + 125	°C

*1 \bar{O}_0 to \bar{O}_7 output pins are 34V (max.).

*2 Reduced by 5.5mW for each increase in Ta of 1°C over 25°C.

*3 Reduced by 5mW for each increase in Ta of 1°C over 25°C.

● Usage conditions range

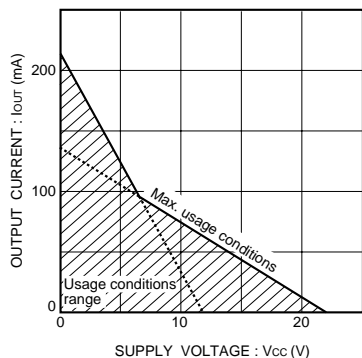


Fig. 1 Power supply voltage and output current usage conditions

Fig. 1 Power supply voltage and output current usage conditions (Per Circuit)

The maximum usage conditions, shown on the left, indicate the absolute maximums for power supply voltage and IC output current. Never exceed these usage conditions, under any circumstances.

● Electrical characteristics (unless otherwise noted, Ta = 25°C, Vcc = + 5.0V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement circuit
Power supply voltage	V _{CC}	4.5	5.0	5.5	V	V _{CC} pin	Fig.2
Quiescent current 1	I _{Q1}	—	4	6	mA	When all data values are "0"	Fig.2
Quiescent current 2	I _{Q2}	—	8	11	mA	When all data values are "0"	Fig.2
Input low level voltage	V _{IL}	—	—	0.8	V	—	Fig.2
Input high level voltage	V _{IH}	2	—	—	V	—	Fig.2
Input high level current	I _{IH}	—	—	0.4	mA	V _{IN} = 4.5 V	Fig.2
Input high level current	I _{IH}	—	—	100	μA	V _{IN} = 2.0 V	Fig.2
Maximum output voltage	V _{O OFF}	—	—	21.8	V	O ₀ to O ₇ pins, I _o = 10μA	Fig.3
Output saturation voltage	V _{O ON}	—	0.8	1.3	V	When I _o = 100mA sink	Fig.3
Output current	I _{OL}	—	—	207	mA	Applied voltage V = 11.8V	Fig.3
"H" level data output voltage	V _{DOH}	2.4	—	—	V	R _L = 10kΩ	Fig.3
"L" level data output voltage	V _{DOL}	—	—	0.8	V	—	Fig.3
Minimum setup time	t ₁	—	—	300	ns	V _{IH} = 2.0V, V _{IL} = 0.8V	—
Minimum shift pulse width	t ₂	—	—	1	μs	V _{IH} = 2.0V, V _{IL} = 0.8V	—
Minimum timing time	t ₃	—	—	1	μs	V _{IH} = 2.0V, V _{IL} = 0.8V	—
Maximum data transfer speed	f _{Max.}	500	—	—	kHz	V _{IH} = 2.0V, V _{IL} = 0.8V	—

● Measurement circuits

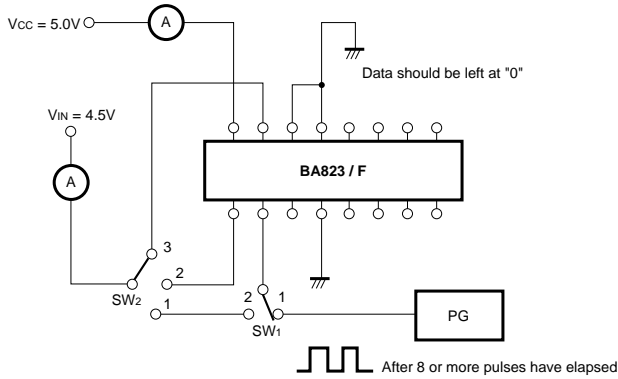


Fig. 2 I_{CC} and I_{IH} measurement circuit

Item	SW ₁	SW ₂
I _{CC}	1	1
I _{IH}	2	1 ~ 3

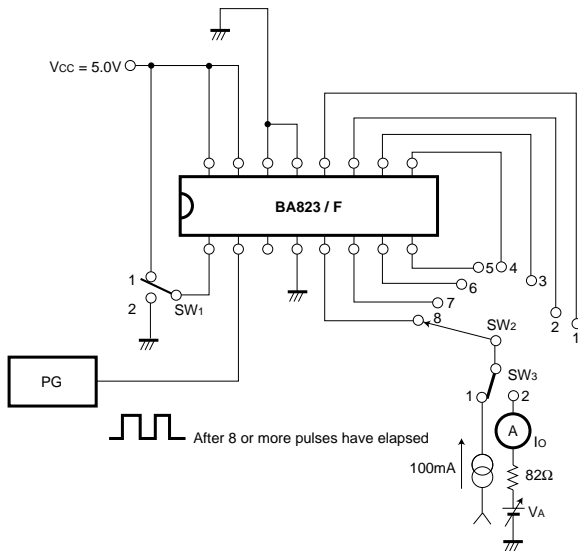


Fig. 3 V_{O ON}, V_{O OFF} and I_{OL} measurement circuit

Item	SW ₁	SW ₂	SW ₃
V _{O ON}	1	1 ~ 8	1
I _{OL}	1	1 ~ 8	2
V _{O OFF}	2	1 ~ 8	2

When tested at V_{O OFF} : I_O = 10μA
 When tested at I_{O ON} : V_A = 30V

● Input conditions


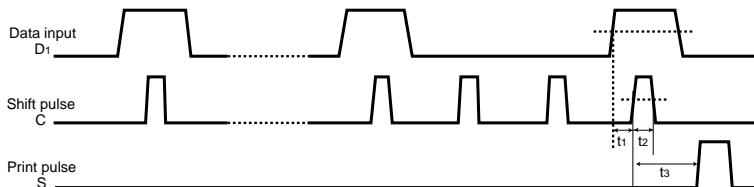



Fig. 4

● Input / output circuits

(a) Input circuit



(b) Output circuit

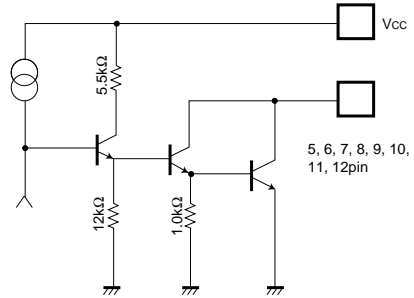

(c) Data output circuit

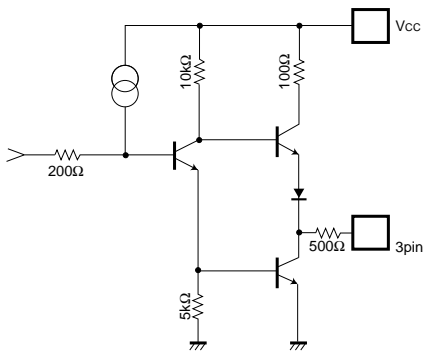


Fig.5

● Electrical characteristic curves

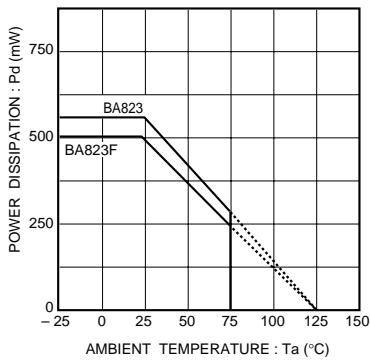


Fig. 6 Power dissipation vs. ambient temperature

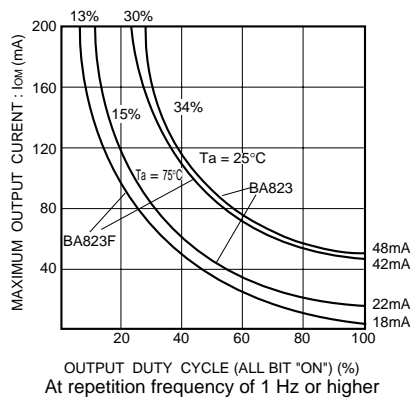


Fig. 7 Output conditions

●Pin descriptions

Pin No.	Pin name	Code	Function
2	SHIFT PULSE	C	Shift pulse of shift register
15	DATA INPUT	D ₁	Data input of shift pulse registered using shift pulse rise
1	STROBE	S	When "1", the content of the shift register is output
12	OUTPUT	\bar{O}_0	"0" when the content of the register is "1" on the 1st bit
11	OUTPUT	\bar{O}_1	"0" when the content of the register is "1" on the 2nd bit
10	OUTPUT	\bar{O}_2	"0" when the content of the register is "1" on the 3rd bit
9	OUTPUT	\bar{O}_3	"0" when the content of the register is "1" on the 4th bit
8	OUTPUT	\bar{O}_4	"0" when the content of the register is "1" on the 5th bit
7	OUTPUT	\bar{O}_5	"0" when the content of the register is "1" on the 6th bit
6	OUTPUT	\bar{O}_6	"0" when the content of the register is "1" on the 7th bit
5	OUTPUT	\bar{O}_7	"0" when the content of the register is "1" on the 8th bit
3	DATA OUTPUT	D ₀	Has passed the \bar{O}_7 output circuit and becomes the input for the next step
16	V _{CC}	V _{CC}	Normally 5.0V used ($\pm 10\%$)
13	GND	GND ₁	\bar{O}_0 to \bar{O}_3 output circuit GND
4	GND	GND ₂	\bar{O}_4 to \bar{O}_7 output circuit GND
14	GND	GND (Dig)	Logic circuit GND

●Timing chart

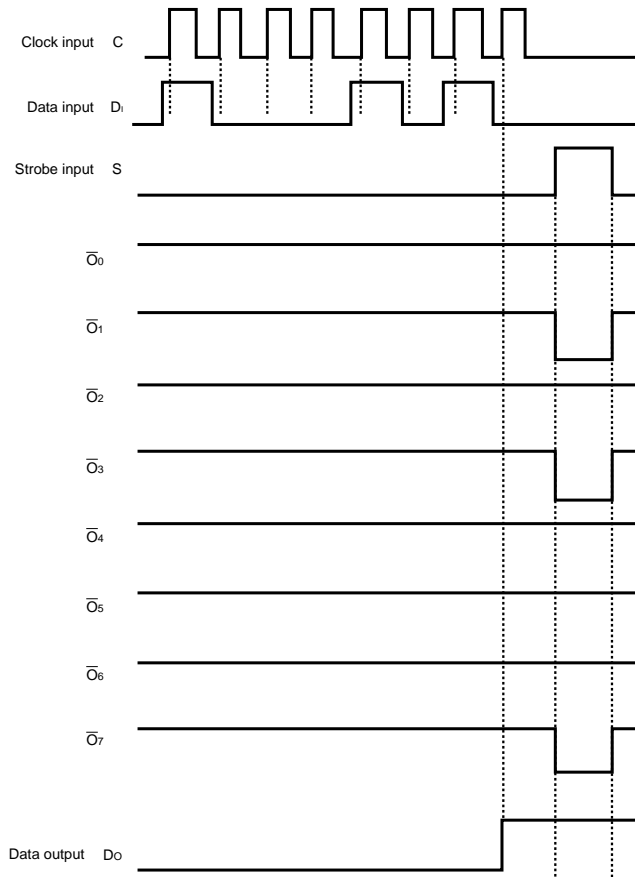


Fig.8

●Application example

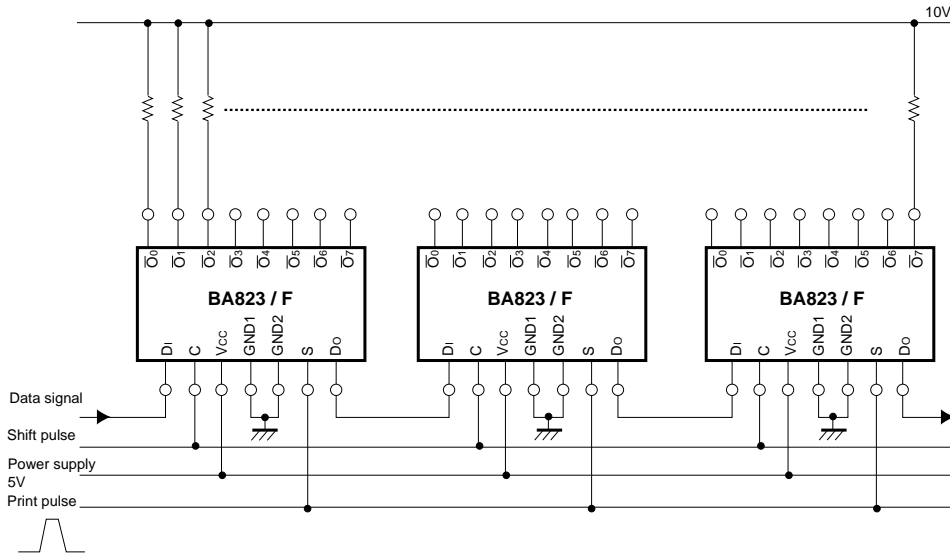


Fig.9

Example of printing using a strobe pulse
 This offers the advantage that the common line (large

current) of the heat element does not need to be switched.

●Circuit operation

The BA823 has the internal configuration shown in the logic diagram, with the following three input pins: clock C, data DI, and strobe S. Data input is synchronized to the clock, with data being read serially at the rising edge. The content of the set shift register appears at output terminals \overline{O}_0 to \overline{O}_7 , as shown in the timing chart in Figure 8, depending on the strobe input, with that

pulse width being the same as that of the strobe input. The data output pin \overline{D}_0 is used when ICs are connected in cascade format, and when the output for the last stage of the shift register appears, is connected to the next data input pin DI. When these clock and strobe latches and power switch are used in common, the output pins can be increased by eight bits each.

●External dimensions (Units: mm)

