

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

**features**

- 11.2-GHz Bandwidth
- 5.5-k $\Omega$  Differential Transimpedance
- 8.5-pA/ $\sqrt{\text{Hz}}$  Typical Input Referred Noise
- 2-mA Maximum Input Current
- Received Signal Strength Indication
- CML Data Outputs
- Offset Cancellation
- Single 3.3-V Supply
- Bare-Die Option

**applications**

- SONET OC-192
- 10-Gbps Ethernet Receivers
- 10-Gbps Fibre Channel Receivers

**description**

The ONET9901TA is a high-speed transimpedance amplifier used in SDH/SONET systems with data rates up to 10.7 Gbps. It features a low input referred noise, 11.2-GHz bandwidth and a 5.5-k $\Omega$  transimpedance.

The ONET9901TA device is available in die form and requires a single 3.3-V supply. The ONET9901TA is power efficient and dissipates less than 100 mW (typical). The ONET9901TA is characterized for operations from 0°C to 85°C.

**available options**

T <sub>A</sub>	PACKAGED DEVICE
0°C to 85°C	ONET9901TAY



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



Copyright © 2004, Texas Instruments Incorporated

# ONET9901TA

## 10.7-Gbps TRANSIMPEDANCE AMPLIFIER WITH RSSI

SLLS615 – APRIL 2004

### block diagram

The ONET9901TA is a high performance 10.7-Gbps transimpedance amplifier that can be segmented into the signal path, filter, and offset cancellation block. The signal path consists of a transimpedance amplifier stage, a voltage amplifier, and an output buffer. The filter circuit provides a filtered VCC for the photodiode. The offset correction circuit uses an internal low-pass filter to cancel the dc on the input and it provides a signal to monitor the received signal strength. A simplified block diagram of the ONET9901TA is shown in Figure 1.

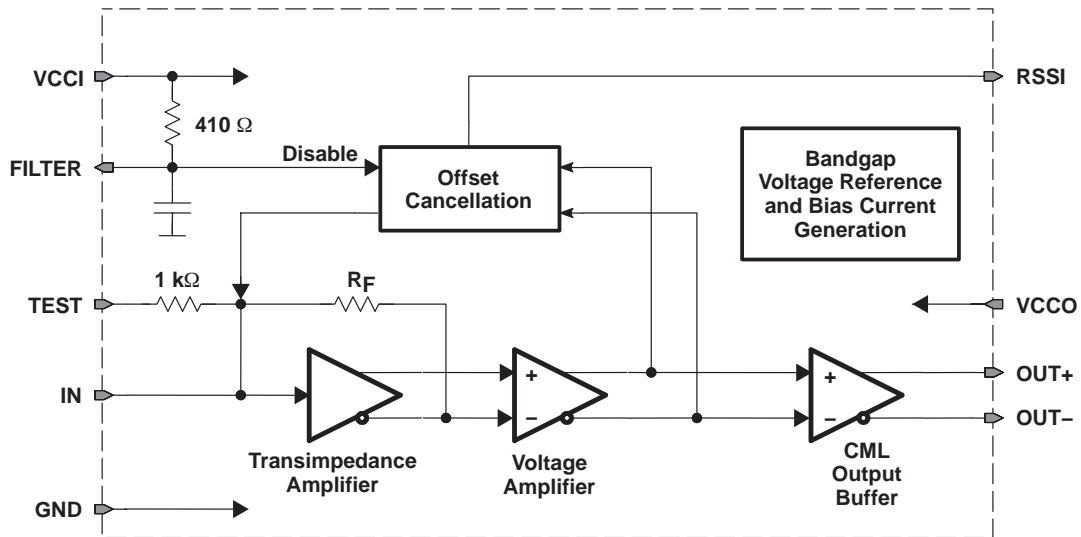


Figure 1. Block Diagram

### signal path

The first stage of the signal path is a transimpedance amplifier that takes the photodiode current and converts it to a voltage signal. The second stage is a voltage amplifier that provides additional gain. The output of the second stage feeds the output buffer and the offset cancellation circuitry. The third and final signal path stage of the ONET9901TA is the output buffer. The output buffer provides CML outputs with an on-chip 50-Ω back-termination to VCCO.

### filter circuitry


The filter pin provides a filtered VCC for the photodiode bias. The on-chip low-pass filter for the photodiode VCC is implemented using a filter resistor of 410 Ω and an internal capacitor. If additional filtering is required for the application, an external capacitor should be connected to the FILTER pin.

### offset cancellation and RSSI

The offset cancellation circuitry performs low pass filtering of the output of the voltage amplifier. This senses the dc offset at the input of the ONET9901TA. The circuitry subtracts current from the input to effectively cancel the dc. The sensed current is mirrored and is used to generate the RSSI output through an external 10-kΩ resistor. To disable the offset correction loop, the FILTER pin should be tied to GND.

**bond pad assignment**

The ONET9901TA is available as bare-die. The location of the bondpads is shown in Figure 2. The circuit is characterized for ambient temperatures between 0°C and 85°C.

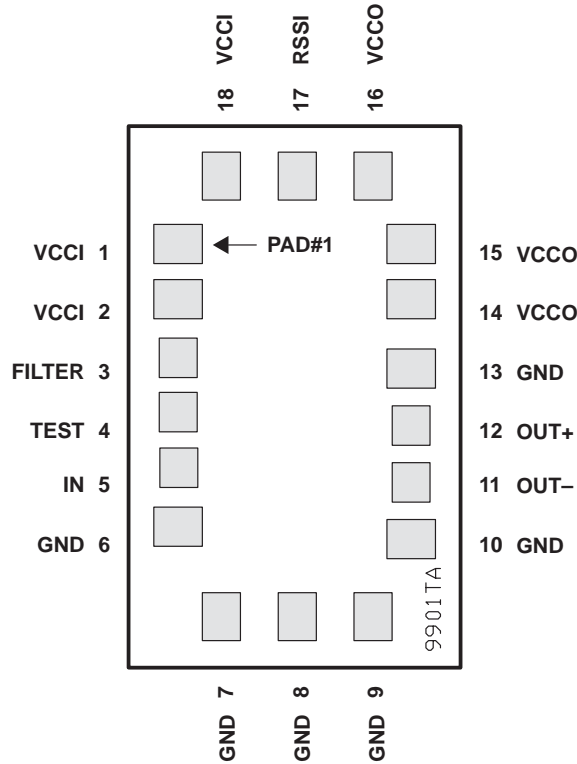

**Figure 2. Bond Pad Assignment of the ONET9901TA**

**terminal functions**

The following table shows a pad description for the ONET9901TA.

TERMINAL		TYPE	DESCRIPTION
NAME	NO.		
VCCI	1, 2, 18	Supply	Input stage 3.3-V $\pm$ 10% supply voltage.
FILTER	3	Analog	Bias voltage for the photodiode (connects to an internal 410- $\Omega$ resistor to VCCI). To disable the offset correction loop, connect the FILTER pin to GND.
TEST	4	Analog in	Test pad. Connects to IN via a 1-k $\Omega$ resistor.
IN	5	Analog in	Data input to TIA
GND	6–10,13	Supply	Circuit ground
OUT–	11	Analog out	Inverted data output. On-chip 50- $\Omega$ back-terminated to VCCO.
OUT+	12	Analog out	Non-inverted data output. On-chip 50- $\Omega$ back-terminated to VCCO.
VCCO	14–16	Supply	Output stage 3.3-V $\pm$ 10% supply voltage.
RSSI	17	Analog out	Analog output voltage proportional to the input data amplitude. Indicates the strength of the received signal (RSSI).

# ONET9901TA

## 10.7-Gbps TRANSIMPEDANCE AMPLIFIER WITH RSSI

SLLS615 – APRIL 2004

### absolute maximum ratings

over operating free-air temperature range unless otherwise noted†

		VALUE	UNIT
$V_{CCI}, V_{CCO}$	Supply voltage, See Note 1	-0.3 to 4	V
$V_{(FILTER)}, V_{(OUT+)}, V_{(OUT-)}, V_{(RSSI)}$	Voltage at FILTER, OUT+, OUT-, and RSSI, See Note 1	-0.3 to 4	V
$I_{(IN)}, I_{(TEST)}$	Supply current into IN and TEST	-5 to 5	mA
$I_{(FILTER)}$	Supply current into FILTER	-8 to 8	mA
$I_{(OUT+)}, I_{(OUT-)}$	Continuous current at outputs	-25 to 25	mA
ESD	ESD rating at all pins	2	kV (HBM)
$T_{J(max)}$	Maximum junction temperature	125	°C
$T_{stg}$	Storage temperature range	-65 to 85	°C
$T_A$	Operating free-air temperature range	0 to 85	°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values are with respect to the network ground terminal.

### recommended operating conditions

	MIN	TYP	MAX	UNIT
Supply voltage, $V_{CCI}, V_{CCO}$	3	3.3	3.6	V
Operating free-air temperature, $T_A$	0		85	°C

### dc electrical characteristics

over recommended operating conditions (unless otherwise noted), typical operating condition is at  $V_{CCI} = V_{CCO} = 3.3$  V and  $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{CC}$ Supply voltage		3	3.3	3.6	V
$I_{CC}$ Supply current			30	41	mA
$V_{IN}$ Input bias voltage			0.84	0.96	V
$r_o$ Output resistance	Single-ended to VCC		50		$\Omega$
$r_{(FILTER)}$ Photodiode filter resistance		330	410	500	$\Omega$

**ac electrical characteristics**

over recommended operating conditions (unless otherwise noted), typical operating condition is at  $V_{CCI} = V_{CCO} = 3.3\text{ V}$  and  $T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{IN,OV L}$	AC input overload current		2			$\text{mA}_{p-p}$
	Input linear range	$0.95 < \text{linearity} < 1.05$	50	60		$\mu\text{A}_{p-p}$
$A_{RSSI}$	RSSI gain	10-k $\Omega$ load, See Note 2	1500	2000	2500	V/A
$Z(21)$	Small signal transimpedance	Differential output, $10\ \mu\text{A}_{p-p} < I_{IN} = < 50\ \mu\text{A}_{p-p}$	4400	5500	6600	$\Omega$
$BW(H_{-3dB})$	Small signal bandwidth	$C_{PD} = 0.2\ \text{pF}$		11.2		GHz
$BW(L_{-3dB})$	Low frequency -3 dB bandwidth	-3 dB, $I_{IN} = < 50\ \mu\text{A}_{p-p}\ \text{dc}$		17		kHz
$BW(H_{-3dB_{RSSI}})$	RSSI bandwidth			5		kHz
$I_{N,IN}$	Input referred RMS noise	$C_{PD} = 0.2\ \text{pF}$		900		nA
	Input referred noise density	$C_{PD} = 0.2\ \text{pF}$		8.5		$\text{pA}/\sqrt{\text{Hz}}$
DJ	Deterministic jitter	$I_{IN} < 1.3\ \text{mA}_{p-p}$ (K28.5 pattern)		7		$\text{ps}_{p-p}$
		$I_{IN} = 2\ \text{mA}_{p-p}$ (K28.5 pattern)		11	22	
$V_{OD(max)}$	Maximum differential output voltage	$I_{IN} = 1\ \text{mA}_{p-p}$		500	700	$\text{mV}_{p-p}$

NOTE 2: On the chip, a 6725- $\Omega$  resistor is used in parallel to the external 10-k $\Omega$  resistor, resulting in a total 4-k $\Omega$  resistor for a typical process. By choosing an appropriate external resistor, the typical RSSI gain can be adjusted. Without an external resistor, the RSSI gain is approximately 3360 V/A under typical conditions.

**APPLICATION INFORMATION**

Figure 3 shows the ONET9901TA being used as a receiver in a typical fiber optic application. The ONET9901TA converts the electrical current generated by the PIN photodiode into a differential voltage output. The FILTER input provides a dc bias voltage for the PIN that is low pass filtered by the combination of the internal 410- $\Omega$  resistor and internal capacitor. For additional power supply filtering, use an external capacitor ( $C_{FILTER}$ ). The RSSI output is used to mirror the photodiode output current and must be connected via a 10-k $\Omega$  resistor to GND or left open. Within the ONET9901TA, the OUT+ and OUT- pins are internally terminated by a 50- $\Omega$  pullup to VCCO.

# ONET9901TA 10.7-Gbps TRANSIMPEDANCE AMPLIFIER WITH RSSI

SLLS615 – APRIL 2004

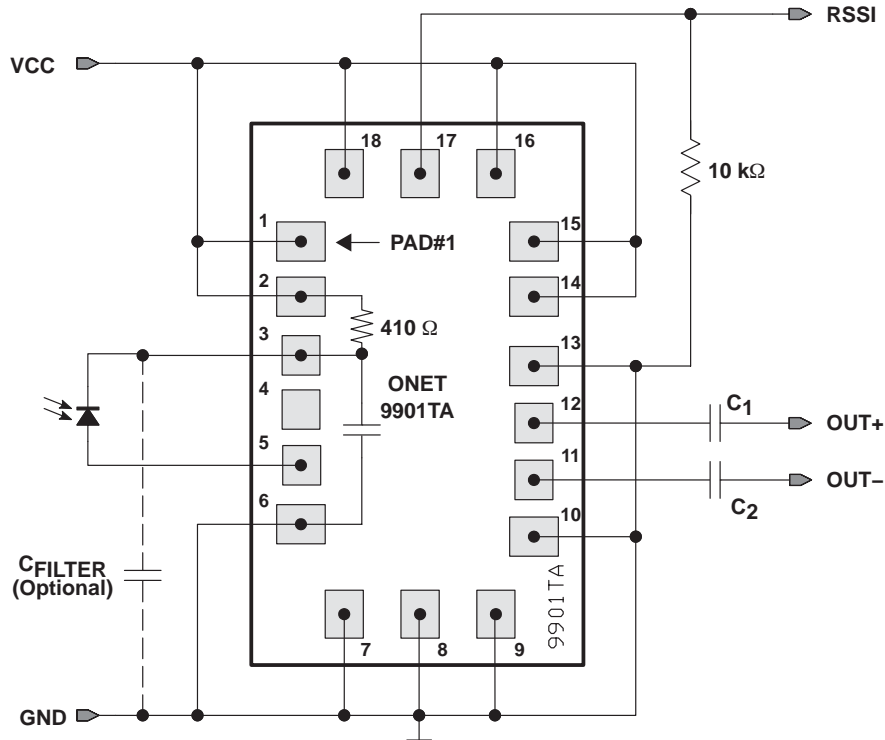


Figure 3. Basic Application Circuit

## board layout

Careful attention to board layout parasitics and external components is necessary to achieve optimal performance with a high-performance transimpedance amplifier like the ONET9901TA.

Recommendations that optimize performance include:

1. Minimize total capacitance on the IN pad by using a low-capacitance photodiode and paying attention to stray capacitances. Place the photodiode close to the ONET9901TA die in order to minimize the bond wire length and thus the parasitic inductance.
2. The external filter capacitor ( $C_{\text{FILTER}}$ ) may have an impact on the transfer function of the TIA and must be chosen with care based on the module implementation.
3. Use identical termination and symmetrical transmission lines at the differential output pins OUT+ and OUT-.
4. Use short bond wire connections for the supply terminals VCCI, VCCO, and GND. Provide sufficient supply voltage filtering.

chip dimensions and pad locations

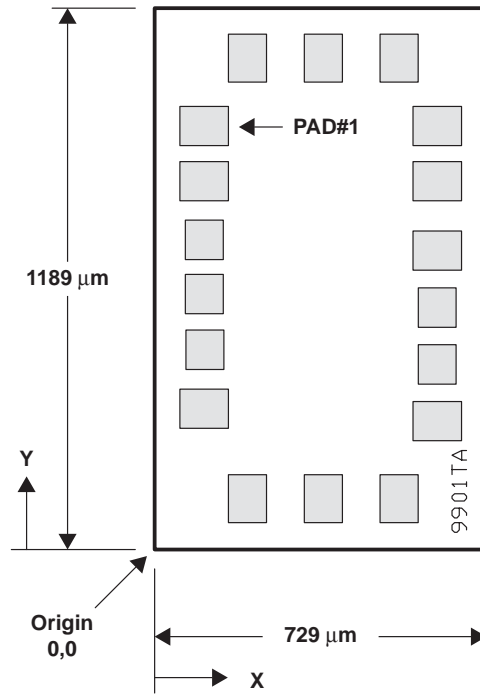


Figure 4. Chip Dimensions and Pad Locations

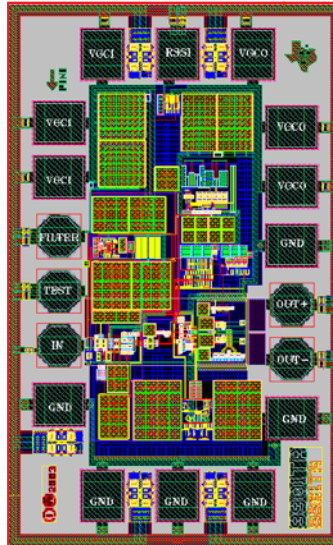


Figure 5. Chip Layout



# ONET9901TA

## 10.7-Gbps TRANSIMPEDANCE AMPLIFIER WITH RSSI


SLLS615 – APRIL 2004

PAD	LOWER LEFT COORDINATE		UPPER RIGHT COORDINATE		SYMBOL	TYPE	DESCRIPTION
	x [ $\mu\text{m}$ ]	y [ $\mu\text{m}$ ]	x [ $\mu\text{m}$ ]	y [ $\mu\text{m}$ ]			
1	57	887	162	972	VCCI	Supply	Input stage 3.3-V $\pm$ 10% supply voltage
2	57	767	162	852	VCCI	Supply	Input stage 3.3-V $\pm$ 10% supply voltage
3	67	637	152	722	FILTER	Analog	Bias voltage for photodiode
4	67	517	152	602	TEST	Analog in	Test pad. Connects to IN via a 1-k $\Omega$ resistor
5	67	397	152	482	IN	Analog in	Data input to TIA
6	57	267	162	352	GND	Supply	Circuit ground
7	162	57	247	162	GND	Supply	Circuit ground
8	327	57	412	162	GND	Supply	Circuit ground
9	492	57	577	162	GND	Supply	Circuit ground
10	567	237	672	322	GND	Supply	Circuit ground
11	577	367	662	452	OUT-	Analog out	Inverted data output
12	577	487	662	572	OUT+	Analog out	Non-inverted data output
13	567	617	672	702	GND	Supply	Circuit ground
14	567	747	672	832	VCCO	Supply	Output stage 3.3-V $\pm$ 10% supply voltage
15	567	877	672	962	VCCO	Supply	Output stage 3.3-V $\pm$ 10% supply voltage
16	492	1027	577	1132	VCCO	Supply	Output stage 3.3-V $\pm$ 10% supply voltage
17	327	1027	412	1132	RSSI	Analog out	RSSI output voltage signal
18	162	1027	247	1132	VCCI	Supply	Input stage 3.3-V $\pm$ 10% supply voltage


**Table 1. Pad Locations and Description of the ONET9901TA**




**TYPICAL CHARACTERISTICS**

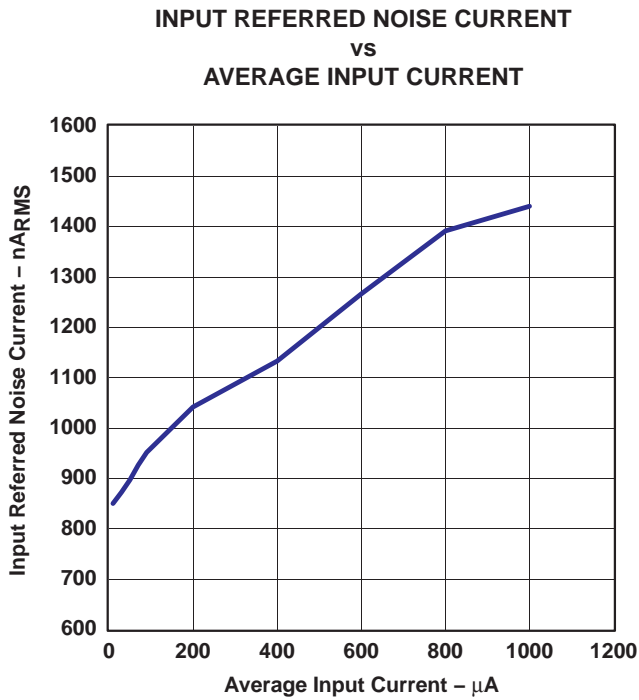


**Figure 6**

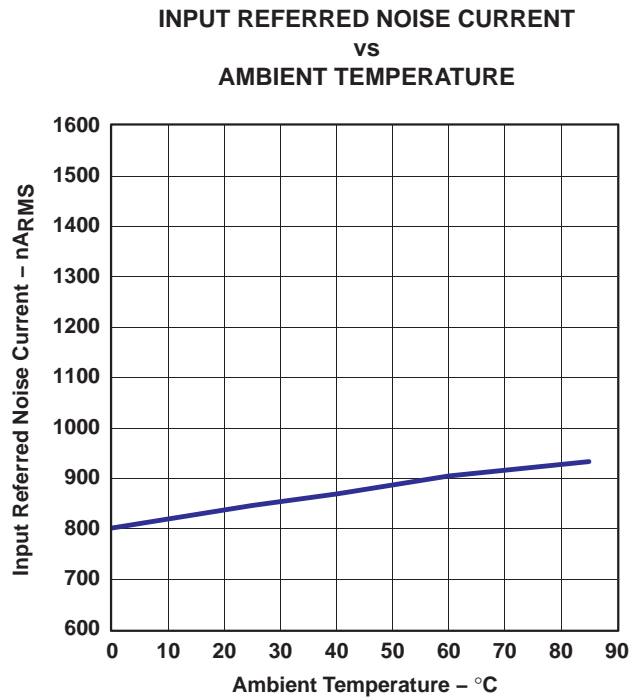

**Figure 7**

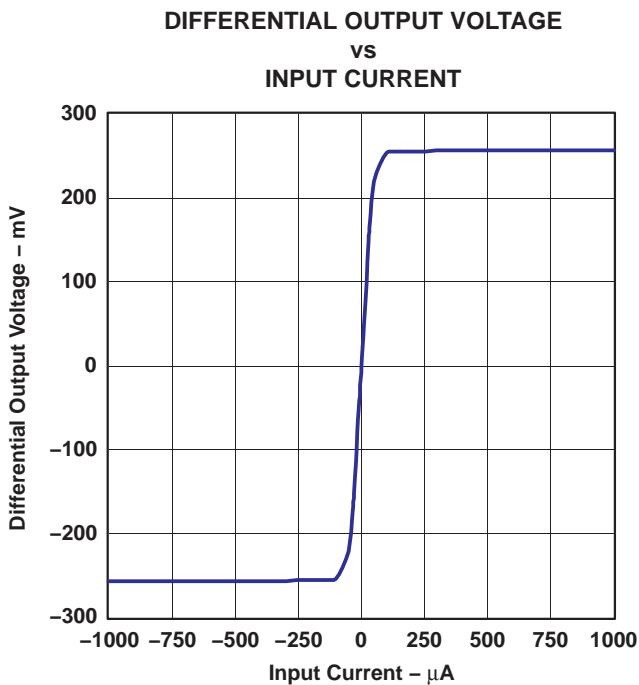


**Figure 8**

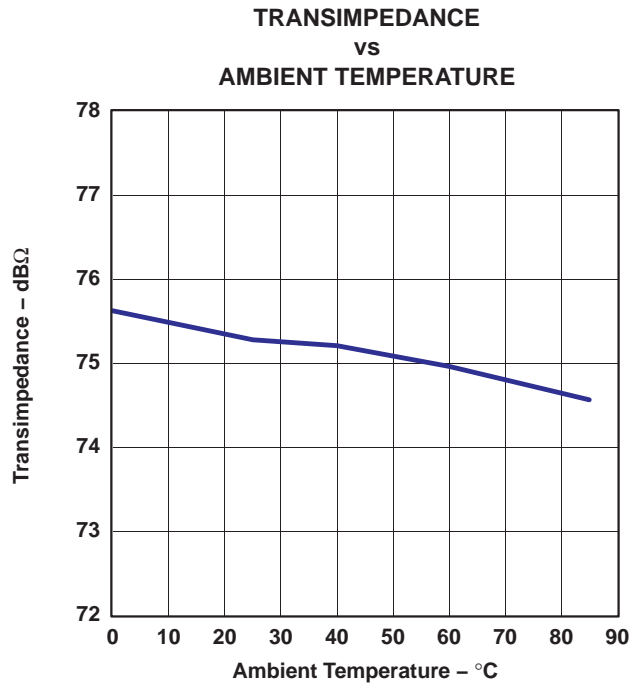

**Figure 9**


**TYPICAL CHARACTERISTICS**

**SMALL SIGNAL BANDWIDTH  
 VS  
 AMBIENT TEMPERATURE**

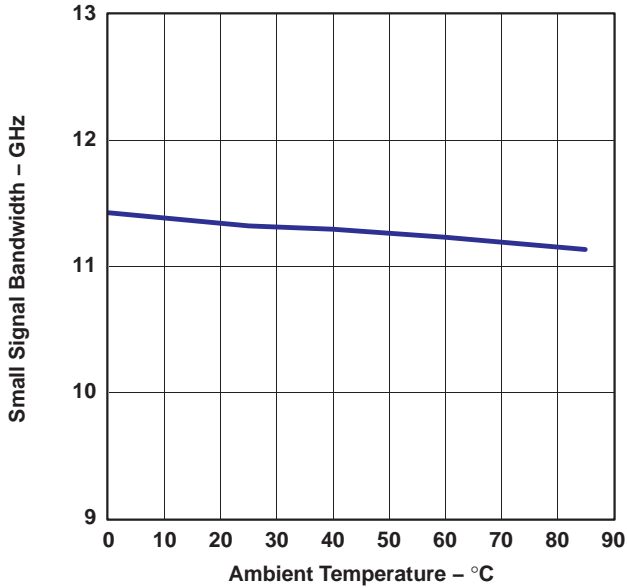


**Figure 10**

**RSSI OUTPUT VOLTAGE  
 VS  
 AVERAGE INPUT CURRENT**

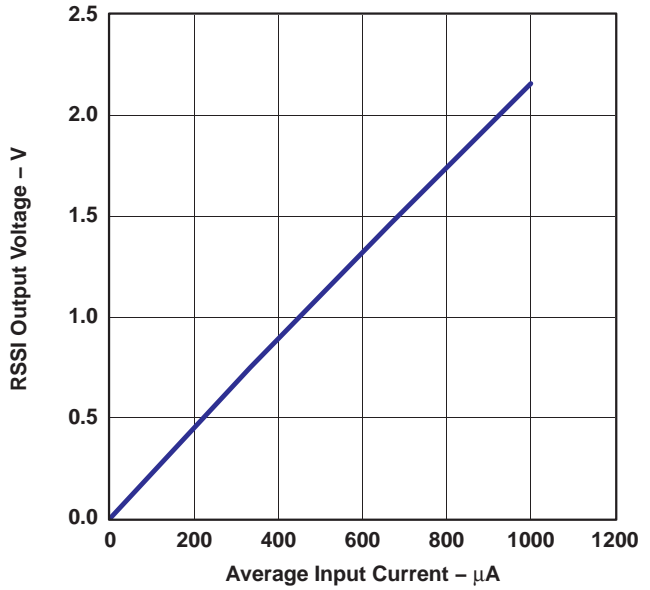

**Figure 11**


**DETERMINISTIC JITTER  
 VS  
 INPUT CURRENT**

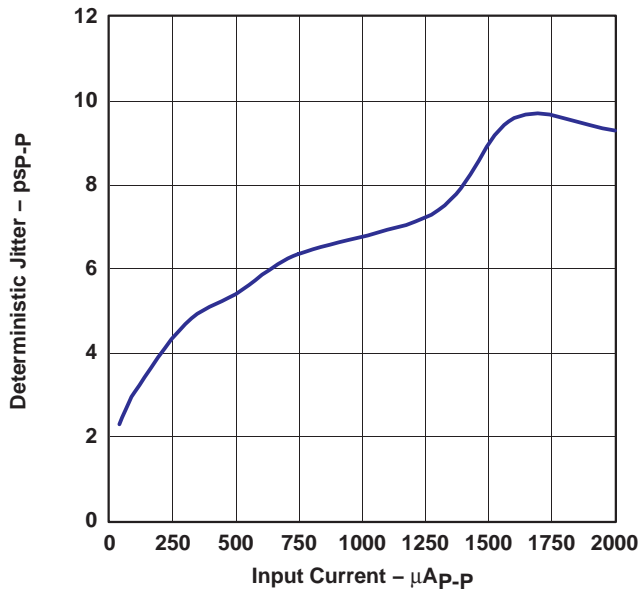

**Figure 12**


TYPICAL CHARACTERISTICS

OUTPUT EYE DIAGRAM AT 10.7 GBPS  
AND 20  $\mu$ A<sub>p-p</sub> INPUT CURRENT

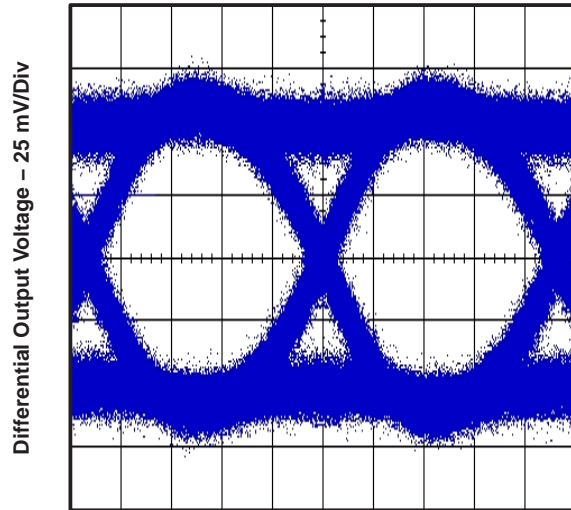

Time – 20 ps/Div  
Figure 13

OUTPUT EYE DIAGRAM AT 10.7 GBPS  
AND 2 mA<sub>p-p</sub> INPUT CURRENT

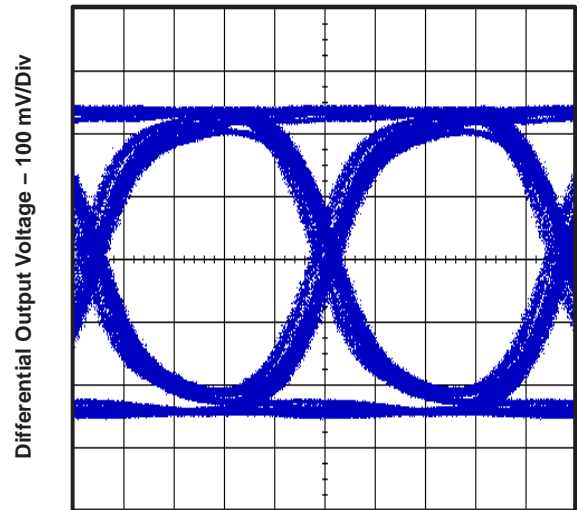

Time – 20 ps/Div  
Figure 14

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

<b>Products</b>		<b>Applications</b>	
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
		Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
		Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265