


阅读申明

1. 本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
2. 本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
3. 本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
4. 如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

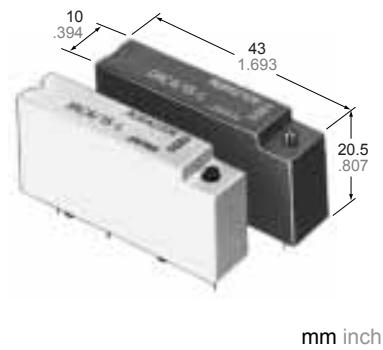

mm inch


FEATURES

- Input and output modules for interfacing between CPU and external input devices or loads
 - IAC: AC input (yellow)
 - OAC: AC output (black)
 - IDC: DC input (white)
 - ODC: DC output (red)
- Excellent transient noise immunity
- Breakdown voltage: 4,000 V between input and output
- Zero-cross switching for reducing EMI
- LED operation indication types available

TYPICAL APPLICATIONS

1. Optimum for minicomputer and microcomputer use, and for feed back control process control systems.
Robot, NC machine, Automatic Assembling machine.
2. Programmable controllers controls for motors, solenoids and solenoid valves.

EXAMPLE OF I/O SYSTEM CONSTRUCTION

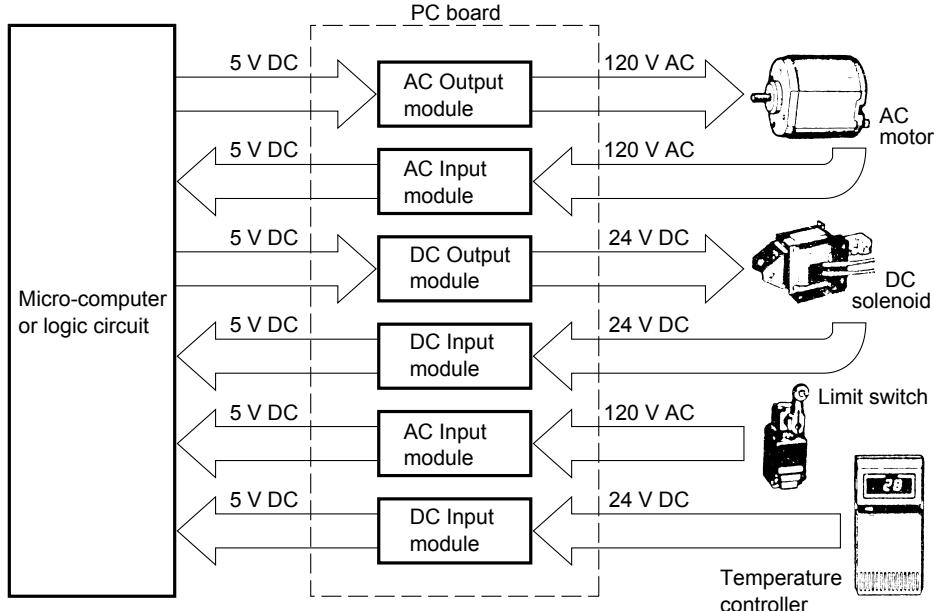

Recently, the microcomputer shown in the left has come into use, with a rapid increase in the use of feedback control for process controllers. As an input/output interface relay, it represents a fast responding interface with long life, noiseless, PC board mounting facility, making circuit design and manufacture simple, and providing amplification of maintenance with space saving. Our company's I/O relays have been grouped for use with either AC or DC devices as AC output type, AC input type, DC output type, and DC input. In addition, the I/O use relay is modularized identically, responding to the various load types for PC board mounting. Because combinations can be freely used, circuit design has been greatly facilitated. Accordingly, the above diagram of interface PC board mounting is a practical construction which can be used.

ORDERING INFORMATION

I AC 4/15 A L

Input or Output	AC or DC	Logic supply or control voltage	Input or Output Voltage		Operation indication
			Input	Output	
I: Input module O: Output module	AC: AC input or AC output DC: DC input or DC output	3/15: 3 to 15 V DC 4/15: 4 to 15 V DC 10/32: 10 to 32 V DC	Nil	80 to 140 V AC 3 to 32 C DC	75 to 125 V AC 3 to 60 V DC
			A	160 to 280 V AC 10 to 200 V DC	75 to 250 V AC 10 to 200 V DC

(Note) Standard packing: Carton: 20 pcs.; Case: 200 pcs.

TYPES

Input modules

Type	Logic supply voltage	Input voltage	Part No.	
			No LED	With LED
AC	4 to 15 V DC	80 to 140 V AC	IAC4/15	IAC4/15-L
		160 to 280 V AC	IAC4/15-A	IAC4/15-AL
	10 to 32 V DC	80 to 140 V AC	IAC10/32	IAC10/32-L
		160 to 280 V AC	IAC 10/32-A	IAC10/32-AL
DC	4 to 15 V DC	3 to 32 V DC	IDC4/15	IDC4/15-L
	10 to 32 V DC	3 to 32 V DC	IDC10/32	IDC10/32-L

Output modules

Type	Logic supply voltage	Output voltage	Part No.	
			No LED	With LED
AC	3 to 15 V DC or 4 to 15 V DC	75 to 125 V AC	OAC3/15	OAC4/15-L
		75 to 250 V AC	OAC3/15-A	OAC4/15-AL
	10 to 32 V DC	75 to 125 V AC	OAC10/32	OAC10/32-L
		75 to 250 V AC	OAC10/32-A	OAC10/32-AL
DC	3 to 15 V DC or 4 to 15 V DC	3 to 60 V DC	ODC3/15	ODC4/15-L
		10 to 200 V DC	ODC3/15-A	ODC4/15-AL
	10 to 32 V DC	3 to 60 V DC	ODC10/32	ODC10/32-L
		10 to 200 V DC	ODC10/32-A	ODC10/32-AL

SPECIFICATIONS

Rating (at 20°C 68°F, Voltage ripple of logic side: less than 1%)

1. Input module

	IAC 4/15	IAC 4/15-L	IAC 10/32	IAC 10/32-L	IAC 4/15-A	IAC 4/15-AL	IAC 10/32-A	IAC 10/32-AL	IDC 4/15	IDC 4/15-L	IDC 10/32	IDC 10/32-L				
Input side	Input voltage				160 to 280 V AC				3 to 32 V DC							
	Input current, Max.				5 mA (100 V)				20 mA (32 V)							
	Operate voltage, Max.				80 V AC				3 V							
	Release voltage Min.				10 V AC				0.8 V							
Logic side	Logic supply voltage	4 to 15 V	10 to 32 V		4 to 15 V	10 to 32 V		4 to 15 V	10 to 32 V							
	Logic supply current, Max.	15 mA							15 mA							
	Breakdown voltage	30 V							30 V							
	Output current, Max.	25 mA							25 mA							
	Max. "OFF-side" leakage current	100 µA							100 µA							
	Max. "ON-side" voltage drop	0.4 V							0.4 V							

2. Output module

	OAC 3/15	OAC 4/15-L	OAC 10/32	OAC 10/32-L	OAC 3/15-A	OAC 4/15-AL	OAC 10/32-A	OAC 10/32-AL	ODC 3/15	ODC 4/15-L	ODC 10/32	ODC 10/32-L	ODC 3/15-A	ODC 4/15-AL	ODC 10/32-A	ODC 10/32-AL			
Logic side	Logic voltage range	3 to 15 V	4 to 15 V	10 to 32 V		3 to 15 V	4 to 15 V	10 to 32 V		3 to 15 V	4 to 15 V	10 to 32 V		3 to 15 V	4 to 15 V	10 to 32 V			
	Input Impedance (Approx.)	1.6 kΩ	1.7 kΩ	6 kΩ	5 kΩ	1.6 kΩ	1.7 kΩ	6 kΩ	5 kΩ	1.6 kΩ	1.7 kΩ	6 kΩ	5 kΩ	1.6 kΩ	1.7 kΩ	6 kΩ	5 kΩ		
	Drop-out voltage, Min.	0.8V							0.8V										
Output side	Max. load current	2 A (Ambient temperature: Max. 30°C)							2 A (Ambient temperature: Max. 40°C)				1 A (Ambient temperature: Max. 40°C)						
	Output voltage	75 to 125 V AC			75 to 250 V AC			3 to 60 V DC				10 to 200 V DC							
	Non-repetitive surge current	30 A (in one cycle at 60 Hz)							5 A (for 1 s)										
	Max. "OFF-state" leakage current	5 mA (100 V)			5 mA (200 V)			1 mA (60 V)				1 mA (200 V)							
	Max. "ON-state" voltage current	1.6 V							1.6 V				2.3 V						
	Min. load current	50 mA							5 mA										


Characteristics (at 20°C 68°F, Voltage ripple of logic side: less than 1%)

	Input modules		Output modules	
	IAC	IDC	OAC	ODC
Operate time, max.	20 ms	5 ms	(1/2 cycle of voltage sine wave)+1 ms	0.5 ms
Release time, max.	20 ms	5 ms	(1/2 cycle of voltage sine wave)+1 ms	2 ms
Insulation resistance	10 ⁹ Ω between input and output (at 500 V DC)			
Breakdown voltage	4,000 V AC between input and output			
Vibration resistance	Functional	117.6 mm/s ² {12G}, 10 to 55 Hz at double amplitude of 2 mm (10 minutes for X, Y, Z axis)		
	Destructive	117.6 mm/s ² {12G}, 10 to 55 Hz at double amplitude of 2 mm (1hour for X, Y, Z axis)		
Shock resistance	Functional	Min. 980 m/s ² {100G} (4 times each for X, Y, Z axis)		
	Destructive	Min. 980 m/s ² {100G}(5 times each for X, Y, Z axis)		
Ambient temperature	-30°C to +80°C -22°F to +176°F			-30°C to +80°C -22°F to +176°F
Storage temperature	-30°C to +100°C -22°F to +212°F			-30°C to +100°C -22°F to +212°F
Operational method	-			Zero-cross (Turn-ON and Turn-OFF)
	-			-


I/O

DIMENSIONS

Input module (IAC, IDC)

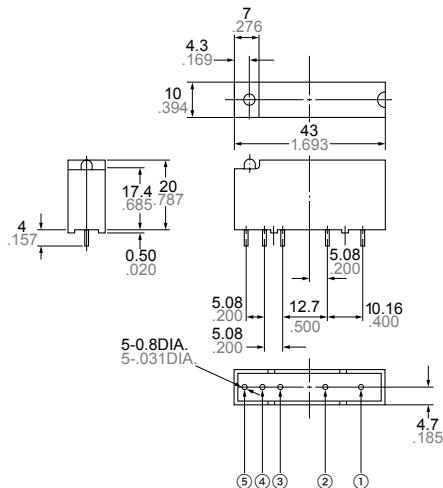


PC board pattern (Copper-side view)




	IAC	IDC
①	Input: AC	Input: DC +
②	Input: AC	Input: DC -
③	Vcc	Vcc
④	Logic output	Logic output
⑤	Grounding	Grounding
Body color	Yellow	White

Output modules (OAC, ODC)

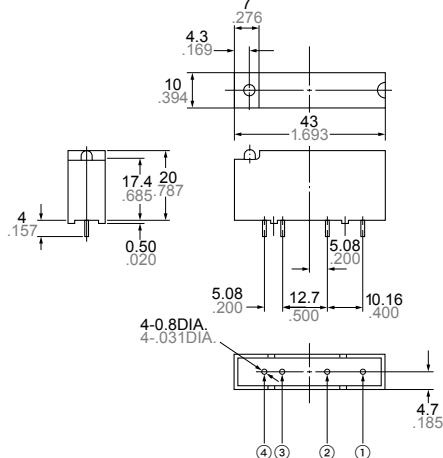


PC board pattern (Copper-side view)




	OAC	ODC
①	Output: AC	Output: DC +
②	Output: AC	Output: DC -
③	Input: DC+	Input: DC+
④	Input: DC-	Input: DC-
Body color	Black	Red

REFERENCE DATA


1-1. Load current vs. ambient temperature (OAC)

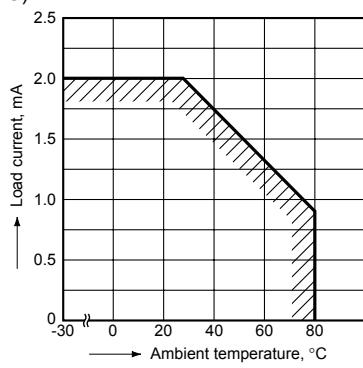


1-2. Load current vs. ambient temperature (ODC)

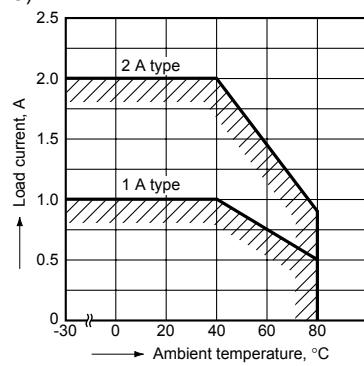


2-1. Surge current vs. time (OAC)

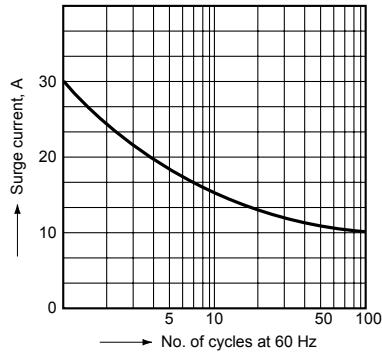

2-2. Surge current vs. time (IDC)

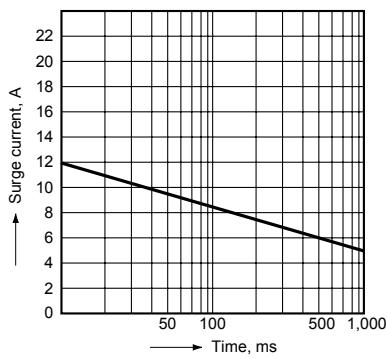

3. Input current vs. input voltage (OAC, ODC)

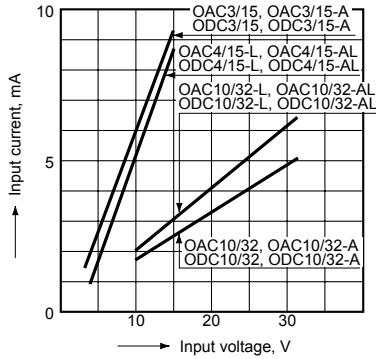

BLOCK DIAGRAM