

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

NEO-M8L

Standard Professional Automotive

POSITIONING

u-blox M8 ADR modules including 3D sensors

Highlights

- Leading performance under poor signal conditions
- Continuous navigation during signal loss
- Complete solution with integrated 3D sensors
- Automatic configuration of wheel-tick/speed input
- Real-time positioning up to 20 Hz rate
- GPS/QZSS, GLONASS, BeiDou, Galileo
- Zero PPM program for automotive grade NEO-M8L-01A



NEO-M8L
12.2 x 16.0 x 2.4 mm

Product description

The NEO-M8L 3D Automotive Dead Reckoning (ADR) modules combine GNSS, inertial sensing, and speed information from the vehicle to provide continuous and accurate 3D positioning for road vehicles.

Incorporating u-blox's latest advancements in multi-GNSS signal processing (now including Galileo), the latest version of NEO-M8L delivers the ideal solution where navigation performance is the priority, regardless of GNSS signal quality or availability. In addition to the on-board sensors, NEO-M8L further eases installation with automatic configuration of speed or wheel-tick inputs, and compensation for in-vehicle antennas.

The intelligent combination of GNSS and sensor measurements enables accurate, real-time positioning, speed and heading information at rates up to 20 Hz, as essential for smooth and responsive interactive display. Access to native, high rate sensor data enables host applications to make full use of the receiver's assets.

The NEO-M8L includes u-blox's latest generation GNSS technology which adds Galileo to the multi-constellation reception that already includes GPS, GLONASS, BeiDou and QZSS. The module provides high sensitivity and fast GNSS signal acquisition and tracking.

UART, USB, DDC (I2C compliant) and SPI interface options provide flexible connectivity and enable simple integration with most u-blox cellular modules.

NEO-M8L modules use GNSS chips qualified according to AEC-Q100 and are manufactured in ISO/TS 16949 certified sites. Qualification tests are performed as stipulated in the ISO16750 standard: "Road vehicles – Environmental conditions and testing for electrical and electronic equipment".

The NEO-M8L-01A automotive grade module adheres to automotive industry standard quality specifications and production flow.

Product selector

Model	Category	GNSS				Supply	Interfaces				Features				Grade						
		GPS / QZSS	GLONASS	Galileo	BeiDou		Number of Concurrent GNSS	UART	USB	SPI	DDC (I ² C compliant)	Programmable (Flash)	Data logging	Additional SAW	Additional LNA	RTC crystal	Oscillator	Built-in sensor	Timepulse	Standard	Professional
NEO-M8L-0	ADR	•	•	•	•	3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
NEO-M8L-01A	ADR	•	•	•	•	3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

ADR = Automotive Dead Reckoning / UDR = Untethered Dead Reckoning

C = Crystal / T = TCXO

Features

Receiver type	72-channel u-blox M8 engine GPS/QZSS L1 C/A, GLONASS L10F, BeiDou B1I, Galileo E1B/C SBAS L1 C/A: WAAS, EGNOS, MSAS, GAGAN
Nav. update rate	Up to 20 Hz
Position accuracy	2.0 m CEP
ADR position error	(Estimated) 2 % of distance travelled without GNSS
Acquisition	Cold starts: 26 s Aided starts: 3 s Reacquisition: 1 s
Sensitivity	Tracking & Nav: -160 dBm ¹ Cold starts: -148 dBm Hot starts: -157 dBm
Assistance	AssistNow GNSS Online AssistNow GNSS Offline (up to 35 days) AssistNow Autonomous (up to 6 days) OMA SUPL & 3GPP compliant
Oscillator	Crystal
RTC	Built-in
Sensor	Onboard 3D accelerometer and 3D gyroscope
Supported antennas	Active or passive antenna
Raw Data	Code phase output
Navigation outputs	Position, speed, acceleration, heading, heading rate, attitude, time
Data-logger	For position, velocity, time, and odometer data

¹ Limited by FW for best DR performance

Electrical data

Supply voltage	2.7 V to 3.6 V
Power consumption	29 mA @ 3.0 V (Continuous, default concurrent mode)
Backup Supply	1.4 to 3.6 V

Interfaces

Serial interfaces	1 UART 1 USB V2.0 full speed 12 Mbit/s 1 SPI (optional) 1 DDC (I ² C compliant)
Digital I/O	Configurable timepulse
Timepulse	Configurable 0.25 Hz to 10 MHz
Protocols	NMEA, UBX binary, RTCM

Legal Notice

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.


The information contained herein is provided "as is" and u-blox assumes no liability for the use of the information. No warranty, either express or implied, is given, including but not limited, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by u-blox at any time. For most recent documents, visit www.u-blox.com.

Copyright © 2016, u-blox AG

Package

24 pin LCC (Leadless Chip Carrier): 12.2 x 16.0 x 2.4 mm

Pinout

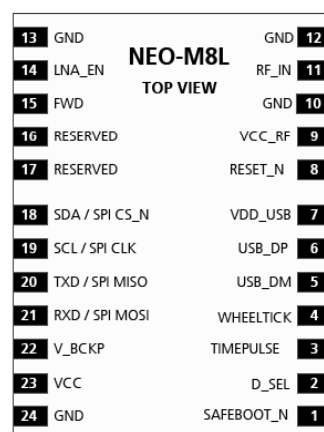

Environmental data, quality & reliability

Operating temp.	-40° C to 85° C
Storage temp.	-40° C to 85° C
RoHS compliant (lead-free)	
Qualification according to ISO 16750	
Manufactured and fully tested in ISO/TS 16949 certified production sites	
Uses u-blox M8 chips qualified according to AEC-Q100	

Support products

u-blox M8 Evaluation Kits:	
Easy-to-use kits to get familiar with u-blox M8 positioning technology, evaluate functionality, and visualize GNSS performance.	
EVK-M8L	u-blox M8 3D Dead Reckoning GNSS Evaluation Kit; supports NEO-M8L modules

Product variants

NEO-M8L-0	u-blox M8 GNSS LCC module with 3D Dead Reckoning and onboard sensors, Professional Grade
NEO-M8L-01A	u-blox M8 GNSS LCC module with 3D Dead Reckoning and onboard sensors, Automotive Grade

Further information

For contact information, see www.u-blox.com/contact-us.
For more product details and ordering information, see the product data sheet.