

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

A low-profile slide switch with 1.4mm thickness



■ Typical Specifications

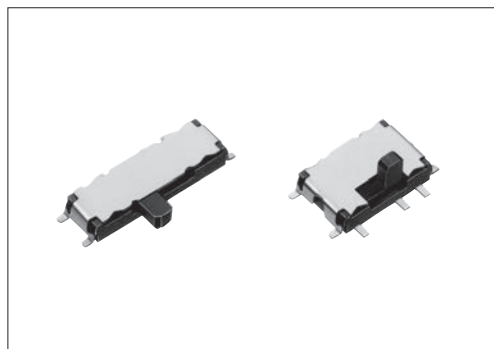

Items		Specifications
Rating (max.)/(min.) (Resistive load)		0.3A 5V DC / 50μA 3V DC
Contact resistance (Initial performance / After lifetime)		70mΩ max. / 130mΩ max.
Operating force		Refer to the dimensions.
Operating life	Without load	10,000 cycles 100mΩ max.
	With load	10,000 cycles 130mΩ max. (0.3A 5V DC)

■ Product Line

Product Line														
Travel (mm)	Actuator direction	Actuator thickness (mm)	Poles	Positions	Changeover timing	Ground terminal	Soldering	Minimum order unit (pcs.)		Products No.	Drawing No.			
								Japan	Export					
1.5	Vertical	t0.8	2	2	Not specified	Without	Reflow	1,800	7,200	SSSS820101	1			
				3		With				SSSS820301	2			
				2						SSSS820201	1			
				3		Without				SSSS820501	2			
	Horizontal	t1.1	1	2		Without		4,500	18,000	SSSS810701	3			
				3		With				SSSS811501	4			
				2						SSSS811101	3			
				3		Without				SSSS812201	4			
2				2					SSSS810201	5				


■ Note

Please contact us for automotive use products.

■ Packing Specifications

Taping

Product No.	Number of packages (pcs.)			Reel width W (mm)	Tape width (mm)	Export package measurements (mm)
	1 reel	1 case / Japan	1 case / export packing			
SSSS820101 SSSS820301 SSSS820201 SSSS820501	1,800	3,600	7,200	25.4	24	406×406×190
SSSS810701 SSSS811501 SSSS811101 SSSS812201 SSSS810201	4,500	9,000	18,000	17.4	16	417×409×139

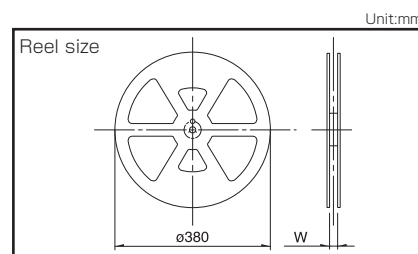

■ Dimensions

Vertical Actuator Type/Horizontal Actuator Type 1.5mm-travel

Unit:mm

No.	Photo	Style	PC board mounting hole and land dimensions (Viewed from direction A)
1		2-pole, 2-position Terminal No.① 0.4 3 1.5 0.75 With ground terminal dimensions Travel 1.5 Operating force : 2N	2-ϕ0.9 hole 3 1.5 0.75 0.7 6-pattern section 4-pattern section for ground terminal
2		2-pole, 3-position Terminal No.① 1.5 3 1.5 With ground terminal dimensions Travel 1.5 Operating force : a $\rightarrow$ b } 2N c $\rightarrow$ b } b $\rightarrow$ a } 2.5N b $\rightarrow$ c }	2-ϕ0.9 hole 1.5 3 1.5 0.7 8-pattern section 4-pattern section for ground terminal
3		1-pole, 2-position Terminal No.① 0.4 3 1.5 0.75 With ground terminal dimensions Travel 1.5 Operating force : 1.5N	2-ϕ0.9 hole 3 1.5 0.75 0.7 3-pattern section 4-pattern section for ground terminal
4		1-pole, 3-position Terminal No.① 1.5 3 1.5 0.4 With ground terminal dimensions Travel 1.5 Operating force : a $\rightarrow$ b } 1.5N c $\rightarrow$ b } b $\rightarrow$ a } 2N b $\rightarrow$ c }	2-ϕ0.9 hole 1.5 3 1.5 0.7 4-pattern section 4-pattern section for ground terminal

Note

Products not marked with ※ in the drawing have no ground terminal.

■ Dimensions

Horizontal Actuator Type 2mm-travel

Unit:mm

No.	Photo	Style	PC board mounting hole and land dimensions (Viewed from direction A)
5			

Note

Products not marked with ※ in the drawing have no ground terminal.

■ Circuit Diagram (Viewed from Direction A)

2-pole, 2-position Drawing No.1		2-pole, 3-position Drawing No.2	
1-pole, 2-position 1.5mm-travel Drawing No.3	1-pole, 3-position 1.5mm-travel Drawing No.4	1-pole, 2-position 2mm-travel Drawing No.5	

Slide Switches

List of Varieties

Series		SSAJ	SSAH	SSSS8※	SSAL	SSAG	SSSS7	
Photo								
Actuator direction	Horizontal	●	●	●	●	●	●	
	Vertical	—	—	●	—	—	—	
Poles-positions	1-2	●	—	●	●	—	●	
	1-3	—	●	●	—	●	●	
	1-4	—	—	—	—	—	—	
	2-2	—	—	●	—	—	—	
	2-3	—	—	●	—	—	—	
	2-4	—	—	—	—	—	—	
	4-2	—	—	—	—	—	—	
Travel (mm)		1.4	1.5	1.5, 2	2	1.5	2	
Operating temperature range		−10℃ to +60℃	−30℃ to +60℃	−40℃ to +85℃	−10℃ to +60℃		−40℃ to +85℃	
Automotive use		—	—	—	—	—	—	
Life cycle								
Rating (max.) (Resistive load)		10mA 5V DC	1mA 5V DC	0.3A 5V DC	10mA 5V DC		0.3A 4V DC	
Rating (min.) (Resistive load)		50μA 3V DC						
Durability	Operating life without load	10,000 cycles 500mΩ max.	10,000 cycles 300mΩ max.	10,000 cycles 100mΩ max.	100,000 cycles 10Ω max.	30,000 cycles (Lock side) 100,000 cycles (Recoil side) 500mΩ max.	10,000 cycles 100mΩ max.	
	Operating life with load Load: as rating			10,000 cycles 130mΩ max.			10,000 cycles 130mΩ max.	
Electrical performance	Initial contact resistance	300mΩ max.	200mΩ max.	70mΩ max.	10Ω max.	200mΩ max.	70mΩ max.	
	Insulation resistance	100MΩ min. 100V DC					100MΩ min. 500V DC	
	Voltage proof	100V AC for 1minute					500V AC for 1minute	
Mechanical performance	Terminal strength		3N for 1minute					
	Actuator strength	Operating direction	10N					
		Pulling direction						
Environmental performance	Cold		−40℃ 96h		−40℃ 500h	−40℃ 96h		−20℃ 500h
	Dry heat		85℃ 96h		85℃ 500h	85℃ 96h		85℃ 500h
	Damp heat		40℃, 90 to 95%RH 96h	60℃, 90 to 95%RH 240h	60℃, 90 to 95%RH 500h	40℃, 90 to 95%RH 96h		60℃, 90 to 95%RH 500h
Page		75	77	79	82	84	87	

Slide Switches Soldering Conditions	111
Slide Switches Cautions	112


Notes

- ※ The operating temperature range for automotive applications can be raised upon request. Please contact us for details.
- Indicates applicability to all products in the series.

Slide Switches Soldering Conditions

Example of Reflow Soldering Condition

1. Heating method: Double heating method with infrared heater.
2. Temperature measurement: Thermocouple ϕ 0.1 to 0.2 CA (K) or CC (T) at soldering portion (copper foil surface).
A heat resisting tape should be used for fixed measurement.
3. Temperature profile

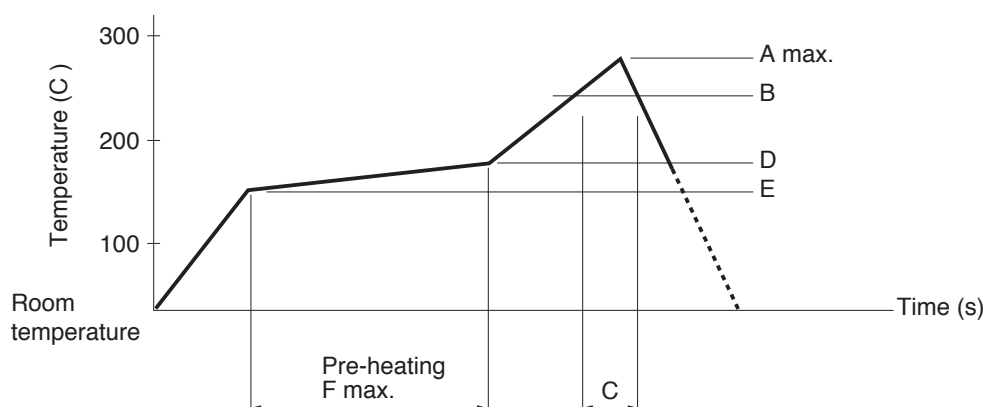

Series (Reflow type)			A (°C) 3s max.	B (°C)	C (s)	D (°C)	E (°C)	F (s)
SSSS2	Vertical	1-pole, 3-position	260	230	40	180	150	120
	Horizontal	1-pole, 2-position 1-pole, 3-position 2-pole, 3-position						
	Vertical	1-pole, 2-position	250					
SSSS7			260					
SSAH, SSAG, SSAJ, SSAL, SSSS8			260					

Notes

1. The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the PC board's material, size, thickness, etc.
The above-stated conditions shall also apply to switch surface temperatures.
2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

Reference for Hand Soldering

Series	Soldering temperature	Soldering time
SSSF, SSSU	350±10°C	3+1/0s
SSSS2	350±10°C	4s max.
SSSS9	350±10°C	3s max.
SSAH, SSAG, SSAJ, SSAL	350±5°C	3s max.
SSSS8	330±5°C	3s max.
SSSS7	320±5°C	3s max.
SSAC	300±10°C	2s max.

Reference for Dip Soldering

(For PC board terminal types)

Series	Items		Dip soldering	
	Preheating temperature	Preheating time	Soldering temperature	Duration of immersion
SSSS2	100°C max.	60s max.	260±5°C	3±1s
SSSS9	120°C max.	60s max.	260±5°C	5+0/-1s (2 times)
SSSF, SSSU	100°C max.	60s max.	260±5°C	10±1s/5±1s
SSAC	100°C max.	60s max.	260±5°C	5±1s