

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Low-Power, Two-Port, High-Speed, USB2.0 (480Mbps) DPDT Analog Switch BL1532



Description

The BL1532 is a Low-Power, Two-Port, High-Speed, USB2.0 (480Mbps) double –pole double-throw (DPDT) Analog Switch featuring an On-Resistance of 4.5 ohm at VCC=3V and a Low On Capacitance 3.7pf Typical.

The BL1532 is compatible with the requirements of USB2.0 and the wide bandwidth needed to pass the third harmonic, resulting in signals with minimum edge and phase distortion. Superior channel-to-channel crosstalk also minimizes interference. Break-before-make function for both parts eliminates signal disruption during switching from preventing both switches being enabled simultaneously.

The BL1532 contains special circuitry on the switch I/O pins for applications where the VCC supply is powered-off (VCC=0), which allows the device to withstand an over-voltage condition. This device is designed to minimize current consumption even when the control voltage applied to the Sel pin is lower than the supply voltage (VCC). This feature is especially valuable to ultra-portable applications, such as cell phones, allowing for direct interface with the general purpose I/Os of the baseband processor. Other applications include switching and connector sharing in portable cell phones, PDAs, digital cameras, printers, and notebook computers.

Pin Configuration

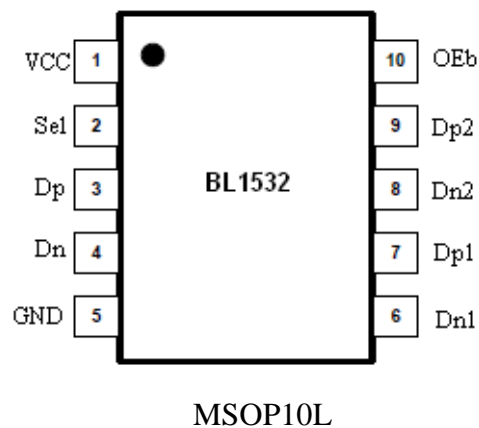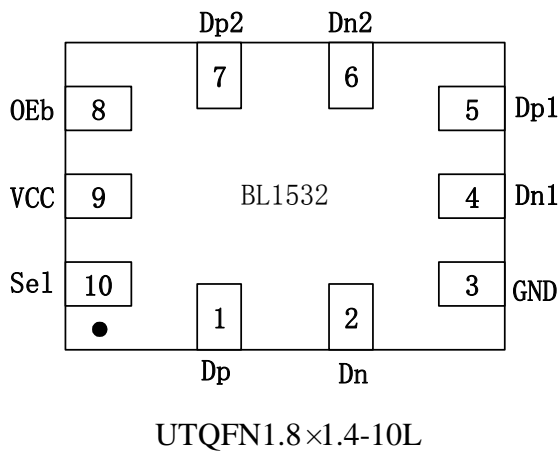


Features

- Wide Power Supply Range: 2.3V to 5V
- Low On Capacitance 3.7pf Typical
- Low On Resistance 4.5Ω (typ) at 3V VDD when $V_{SW}=0.4V$
- High Bandwidth (-3db): >720MHz without C_L and >550MHz with $C_L=5pF$
- Low Power Consumption: 1uA Maximum
- ESD: pass 8kV HBM test
- Over voltage tolerance (OVT) on all USB ports up to 5.25V without external components
- TTL/CMOS Compatible
- Break-Before-Make Switching
- Operation Temperature Range: -40°C to 85°C
- UTQFN1.8×1.4-10L and MSOP10L Package

Applications

Cell phone, PDAs, Digital camera, Notebook, LCD Monitor, TV, SET-TOP BOX

Block Diagram

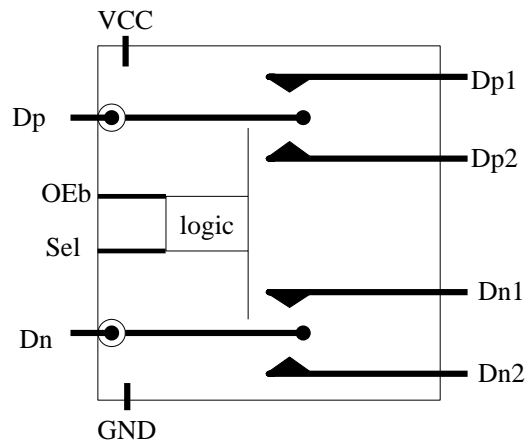

Function Table

OEb	Sel	Function
1	X	Disconnect
0	0	Dp, Dn=Dp1, Dn1
0	1	Dp, Dn=Dp2, Dn2

Pin Description

PIN num		Pin Name	Type	Description
UTQFN10L	MSOP10L			
1	3	Dp	Input/Output	USB Data BUS
2	4	Dn	Input/Output	USB Data BUS
3	5	GND	Ground	Ground
4	6	Dn1	Input/Output	Data Port
5	7	Dp1	Input/Output	Data Port
6	8	Dn2	Input/Output	Data Port
7	9	Dp2	Input/Output	Data Port
8	10	OEb	Input	Switch enable
9	1	VCC	PWR	Power Supply
10	2	Sel	Input	Switch select

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Units
DC Supply Voltage	VCC	-0.5	5.5	V
DC Switch Voltage	Dpn / Dnn / Dp / Dn	-0.5	VCC+ 0.3	V
DC Input Voltage	V _{Oeb} / V _{Sel}	-0.5	VCC	V
Continuous Current	I _(Dpn/Dnn/Dp/Dn)	-50	+50	mA
Peak Current ⁽¹⁾	I _{PEAK(Dpn/Dnn/Dp/Dn)}	-100	+100	mA
Operating Temperature Range	T _A	-40	85	°C

Notes:

(1) Pulsed at 1ms, 50% duty circle

(2) Stress beyond above listed “Absolute Maximum Ratings” may lead permanent damage to the device.

These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ORDERING INFORMATION

MODEL	PIN- PACKAGE	SPECIFIED TEMPERATURE RANGE	PACKAGE MARKING	PACKAGE OPTION
BL1532TQFN	UTQFN1.8×1.4-10L	- 40 °C to +85 °C	HYW ⁽¹⁾	Tape and Reel, 3000
BL1532MSOP	MSOP10L	- 40 °C to +85 °C	H1G YWW	Tape and Reel, 3000

WHERE(1):

“HYW” IS 3 DIGITS PRODUCTION ID COLOUR: LASER MARKING

“H” stands for the product BL1532.

“Y”stands for the product year, for example, “1” stands for the year 2011.

“W” stands for the product week, for example, “a” stands for the first week, “A” stands for the 27th week.

DC ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Guaranteed Limit			Unit
			Min.	Typ. ⁽¹⁾	Max.	
Analog Switch						
Analog Signal Range	$V_{Pn}/V_{Nn}/V_p/V_n$		0		VCC	V
On-Resistance ⁽²⁾	R_{ON}	VCC = 3V, $V_{SW}=0.4V$, $I_{ON}=-8mA$		4.5		Ω
On-Resistance Match Between Channels ⁽³⁾	ΔR_{ON}	VCC = 3V, $V_{SW}=0.4V$, $I_{ON}=-8mA$		0.1		Ω
Current						
Source Off Leakage Current	$I_{Pn / Nn (OFF)}$	VCC=3.6V, $V_p/V_n= 3.6/0.3V$, $V_{Pn}/V_{Nn}=0.3/3.6V$	-1		1	μA
Channel on Leakage Current	$I_{Pn / Nn (ON)}$	VCC=3.6V, $V_p/V_n= 3.6/0.3V$, $V_{Pn}/V_{Nn}=3.6/0.3V$	-1		1	μA
POWER OFF leakage current	I_{OFF}	VCC = 0V, $V_{SW}=0V$ to 3.6V, Vcontrol=0 or VCC	-1		1	μA
Quiescent supply current	I_{CC}	VCC=3V, Vcontrol=0 or VCC, Iout=0			1	μA
Increase in I_{CC} current per control voltage and VCC	I_{CCT}	VCC=3.6V, Vcontrol=2.6V			4	μA
Input Leakage Current	$I_{OEb / Sel}$	$V_{OEb / Sel} = 0$ or VCC			1	μA
Digital I/O						
Input Voltage High	V_{IH}	VCC = 3.0-3.6V	1.6			V
Input Voltage Low	V_{IL}	VCC = 3.0-3.6V			0.5	V

Note:

- (1) Typical characteristics are at +25 °C
- (2) Measured by the voltage drop between Dpn/Dnn and Dp/Dn pins at the indicated current through the switch. On resistance is determined by the lower of the voltage on the two (Dpn/Dnn and Dp/Dn ports).
- (3) $\Delta R_{ON} = R_{ON(MAX)} - R_{ON(MIN)}$, between Dp and Dn .

DYNAMIC CHARACTERISTICS

Parameter	Symbol	Conditions	Guaranteed Limit			Unit
			Min.	Typ. ⁽¹⁾	Max.	
DRIVER CHARACTERISTICS						
Turn-On Time	t_{ON}	VCC=3.3V, $R_L=50\text{ohm}$, $C_L=5\text{pF}$, $V_{SW}=0.8\text{V}$		10	30	ns
Turn-Off Time	t_{OFF}	VCC=3.3V, $R_L=50\text{ohm}$, $C_L=5\text{pF}$, $V_{SW}=0.8\text{V}$		20	25	ns
Break-Before-Make Time	t_{BBM}	VCC=3.3V, $R_L=50\text{ohm}$, $C_L=5\text{pF}$, $V_{SW1,2}=0.8\text{V}$	2.0	3	6.5	ns
Propagation Delay	t_{PD}	VCC=3.3V, $R_L=50\text{ohm}$, $C_L=5\text{pF}$		0.2		ns
CAPACITANCE						
Control Capacitance	C_{IN}	VCC=0V		1.5		pF
ON Capacitance	C_{ON}	VCC = 3.3V, OE=0V, f=240MHz		3.7		pF
OFF Capacitance	C_{OFF}	VCC = 3.3V, OE=3.3V, f=240MHz		2.0		pF
APPLICATION CHARACTERISTICS						
3dB Bandwidth	f_{3dB}	VCC = 3.3V, $R_L=50\text{ohm}$, $C_L=0\text{pF}$		720		MHz
		VCC = 3.3V, $R_L=50\text{ohm}$, $C_L=5\text{pF}$		550		MHz
Off Isolation ⁽²⁾	V_{Iso}	VCC = 3.3V, $R_L=50\text{ohm}$, f=250MHz		-30		dB
Channel crosstalk	XTALK	VCC = 3.3V, $R_L=50\text{ohm}$, f=250MHz		-35		dB

Note:

(1) Typical characteristics are at 25 °C

 (2) Off Channel Isolation = $20\log_{10} [(V_{P1/P2})/V_P]$ or $20\log_{10} [(V_{N1/N2})/V_N]$

TEST SETUP CIRCUITS

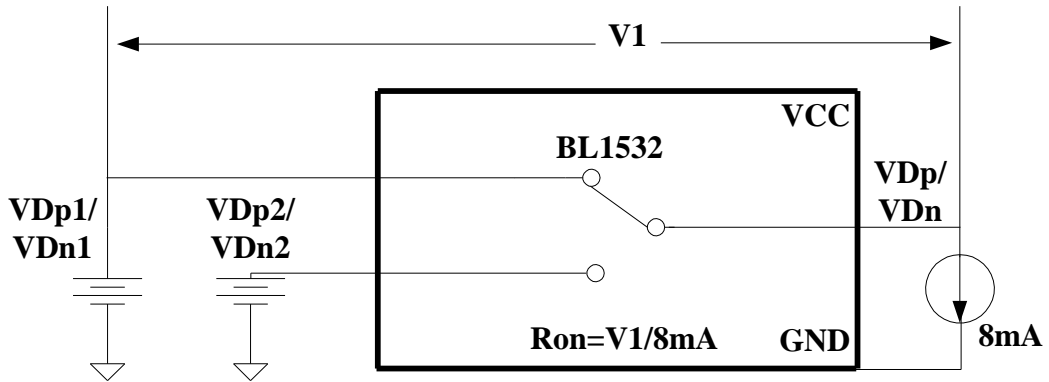


Figure1. Test Circuit for On Resister

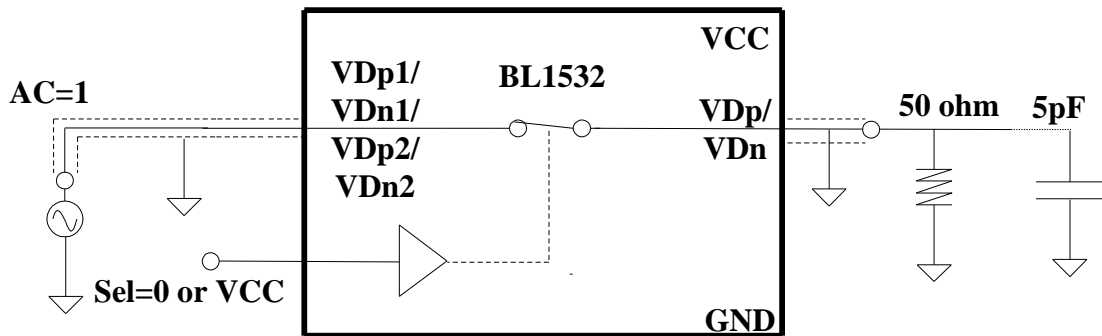


Figure2. Test Circuit for Bandwidth

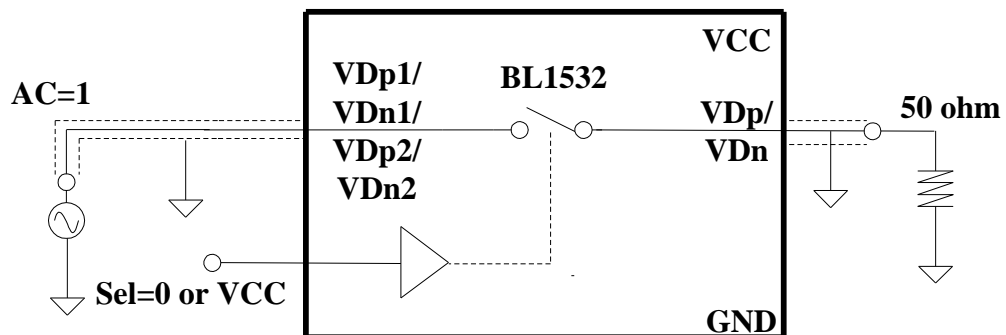


Figure3. Test Circuit for Off Isolation





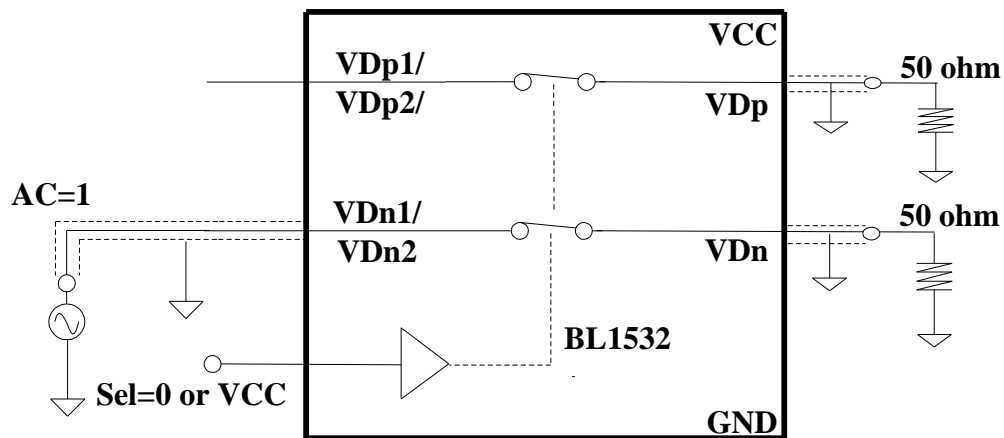




Figure4. Test Circuit for Crosstalk

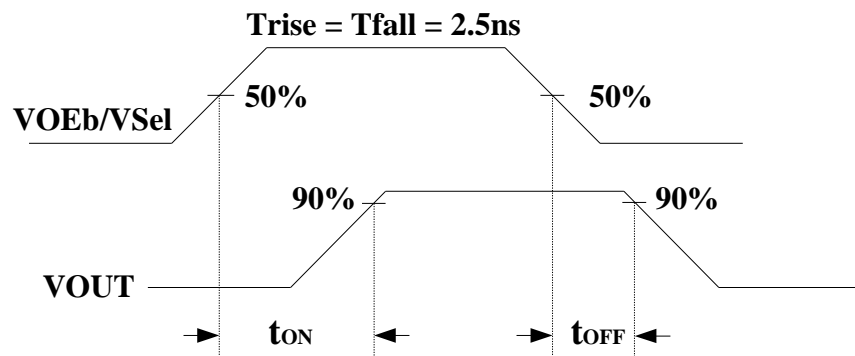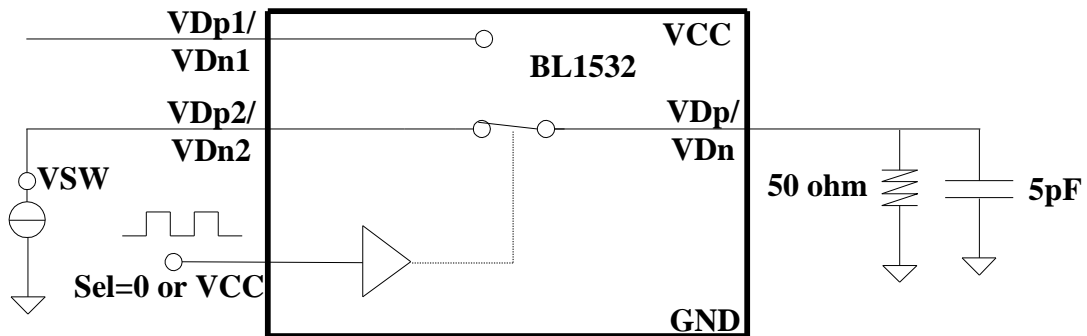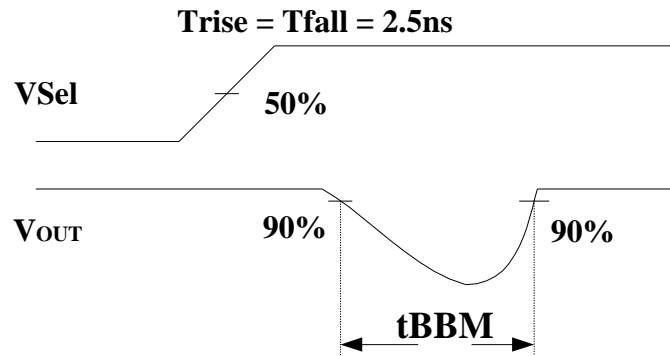

Test Circuit 5. Test Circuit for Switch Times

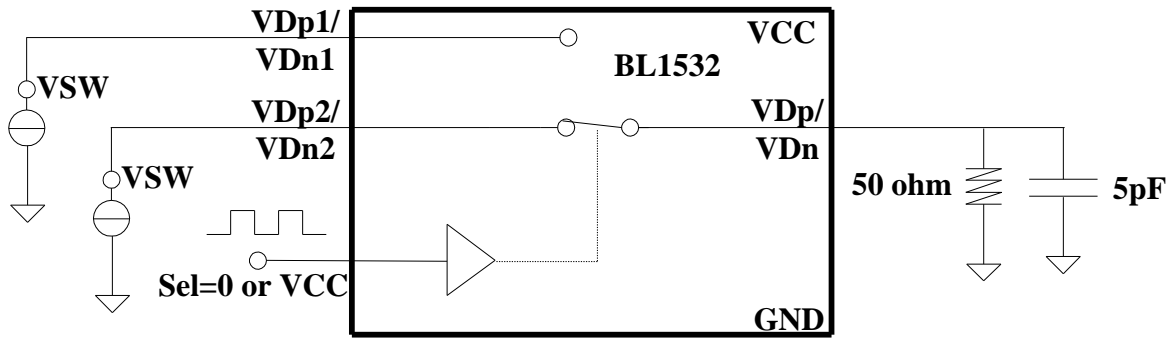

Test Circuit 5. Test Circuit for Break-Before-Make Time Delay, t_{BBM}

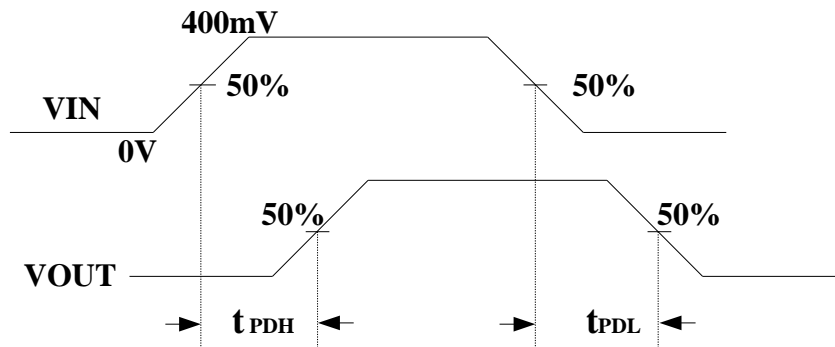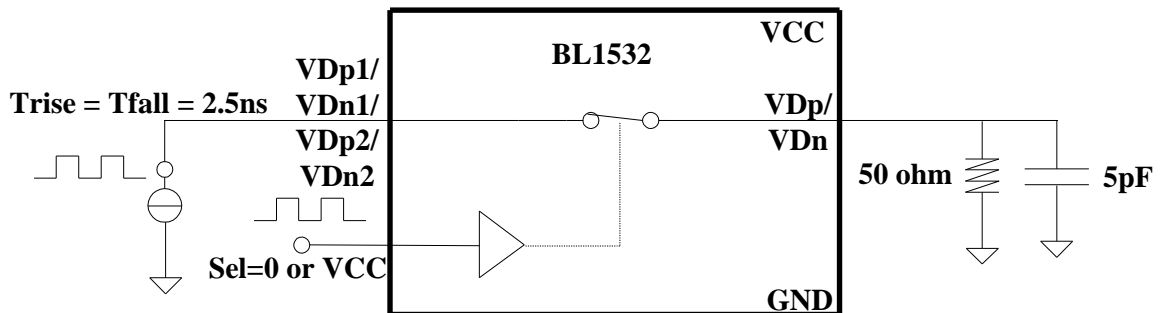

Test Circuit 6. Test Circuit for Propagation Delay, t_{PD}

APPLICATION NOTE**Meeting USB 2.0 V_{BUS} Short Requirements****(1) Power-Off Protection**




For a V_{BUS} short circuit the switch is expected to withstand such a condition for at least 24 hours. The BL1532 has the specially designed circuit which prevents unintended signal bleed through as well as guaranteed system reliability during a power-down, over-voltage condition. The protection has been added to the common pins (Dp, Dn).

(2) Power-On Protection

The USB 2.0 specification also notes that the USB device should be capable of withstanding a V_{BUS} short during transmission of data. This modification works by limiting current flow back into the VCC rail during the over-voltage event so current remains within the safe operating range.


PACKAGE OUTLINE DIMENSIONS

UTQFN1.8×1.4-10L

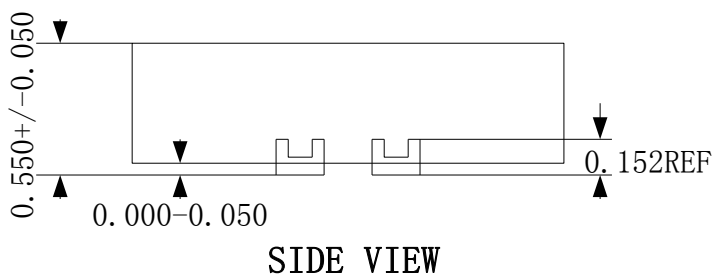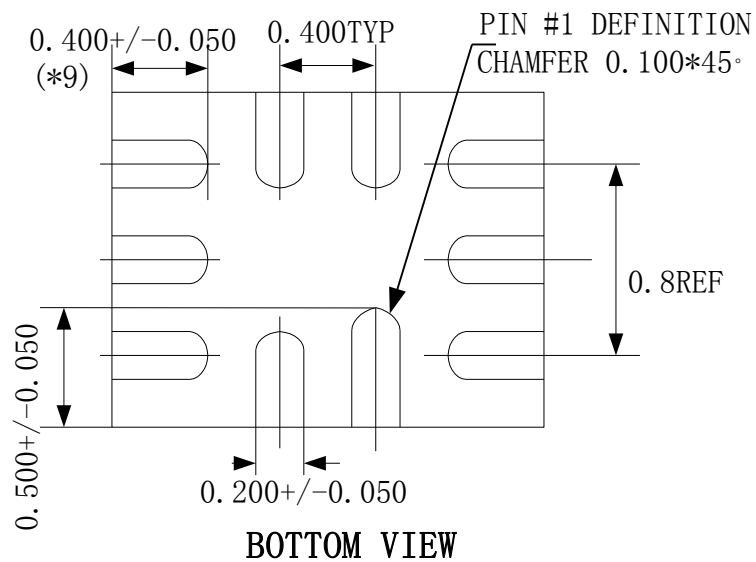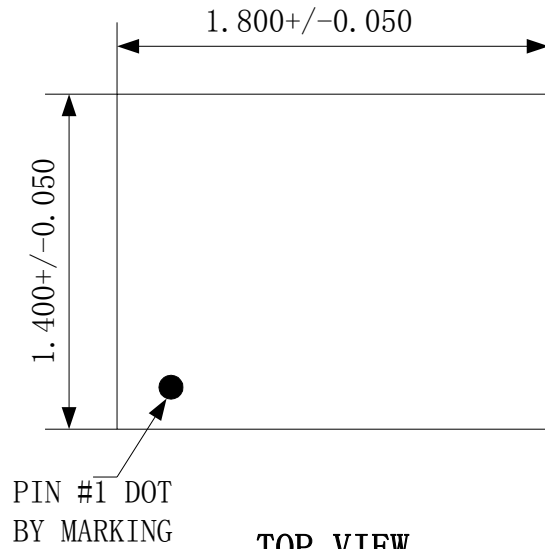

NOTE: All linear dimensions are in millimeters.

MSOP10L

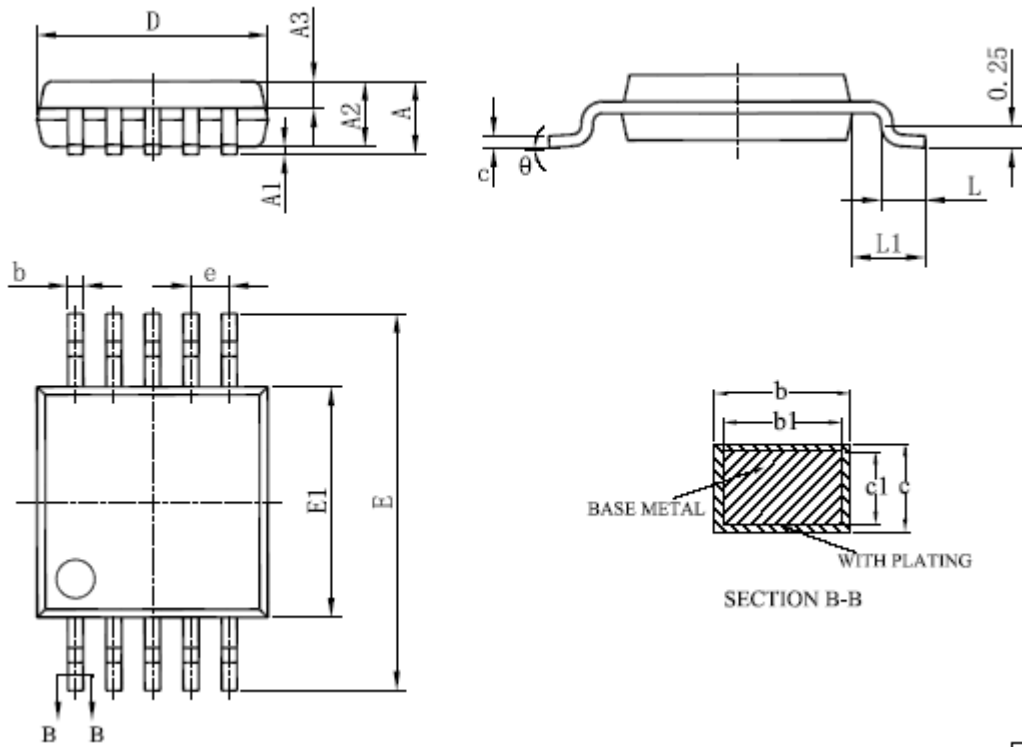

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.10
A1	0.05	—	0.15
A2	0.75	0.85	0.95
A3	0.30	0.35	0.40
b	0.19	—	0.28
b1	0.18	0.20	0.23
c	0.15	—	0.20
c1	0.14	0.152	0.16
D	2.90	3.00	3.10
E	4.70	4.90	5.10
E1	2.90	3.00	3.10
e	0.50BSC		
L	0.40	—	0.70
L1	0.95BSC		
θ	0	—	8°
L/字號標尺寸 (mm)	71*96		