

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



**NPN Silicon Digital Transistor**

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ( $R_1=10k\Omega$ )
- For 6-PIN packages: two (galvanic) internal isolated transistors with good matching in one package

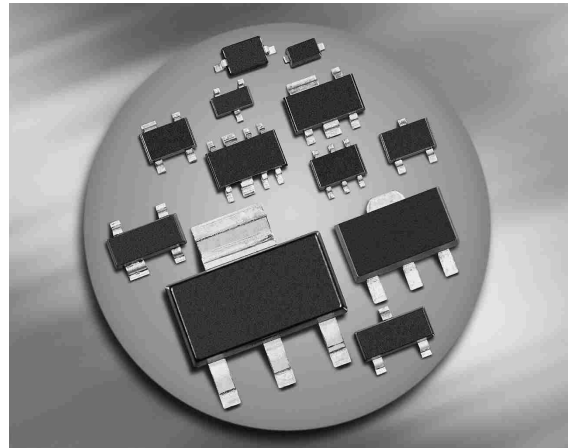

**BCR129/F/L3  
BCR129T/W**

**BCR129S  
SEM4**



Type	Marking	Pin Configuration						Package
		1=B	2=E	3=C	-	-	-	
BCR129	WVs	1=B	2=E	3=C	-	-	-	SOT23
BCR129F	WVs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR129L3	WV	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR129S	WVs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363
BCR129T	WVs	1=B	2=E	3=C	-	-	-	SC75
BCR129W	WVs	1=B	2=E	3=C	-	-	-	SOT323
SEM4	WV	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT666

**Maximum Ratings**

Parameter	Symbol	Value	Unit
Collector-emitter voltage	$V_{CEO}$	50	V
Collector-base voltage	$V_{CBO}$	50	
Emitter-base voltage	$V_{EBO}$	5	
Input on voltage	$V_{i(on)}$	20	
Collector current	$I_C$	100	mA
Total power dissipation- BCR129, $T_S \leq 102^\circ\text{C}$ BCR129F, $T_S \leq 128^\circ\text{C}$ BCR129L3, $T_S \leq 135^\circ\text{C}$ BCR129S, $T_S \leq 115^\circ\text{C}$ BCR129T, $T_S \leq 109^\circ\text{C}$ BCR129W, $T_S \leq 124^\circ\text{C}$ SEMH4, $T_S \leq 75^\circ\text{C}$	$P_{tot}$	200 250 250 250 250 250 250	mW
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-65 ... 150	

**Thermal Resistance**

Parameter	Symbol	Value	Unit
Junction - soldering point <sup>1)</sup>	$R_{thJS}$		K/W
BCR129		$\leq 240$	
BCR129F		$\leq 90$	
BCR129L3		$\leq 60$	
BCR129S		$\leq 140$	
BCR129T		$\leq 165$	
BCR129W		$\leq 105$	
SEMH4		$\leq 300$	

<sup>1</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance


**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(BR)CEO}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(BR)CBO}$	50	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	5	-	-	
Collector-base cutoff current $V_{CB} = 40 \text{ V}, I_E = 0$	$I_{CBO}$	-	-	100	nA
DC current gain <sup>1)</sup> $I_C = 5 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{FE}$	120	-	630	-
Collector-emitter saturation voltage <sup>1)</sup> $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	$V_{CEsat}$	-	-	0.3	V
Input off voltage $I_C = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$	$V_{i(off)}$	0.4	-	1	
Input on voltage $I_C = 2 \text{ mA}, V_{CE} = 0.3 \text{ V}$	$V_{i(on)}$	0.5	-	1.1	
Input resistor	$R_1$	7	10	13	k $\Omega$
<b>AC Characteristics</b>					
Transition frequency $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	$f_T$	-	150	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{cb}$	-	3	-	pF

<sup>1)</sup>Pulse test:  $t < 300 \mu\text{s}$ ;  $D < 2\%$


**DC current gain  $h_{FE} = f(I_C)$**

$V_{CE} = 5\text{ V}$  (common emitter configuration)

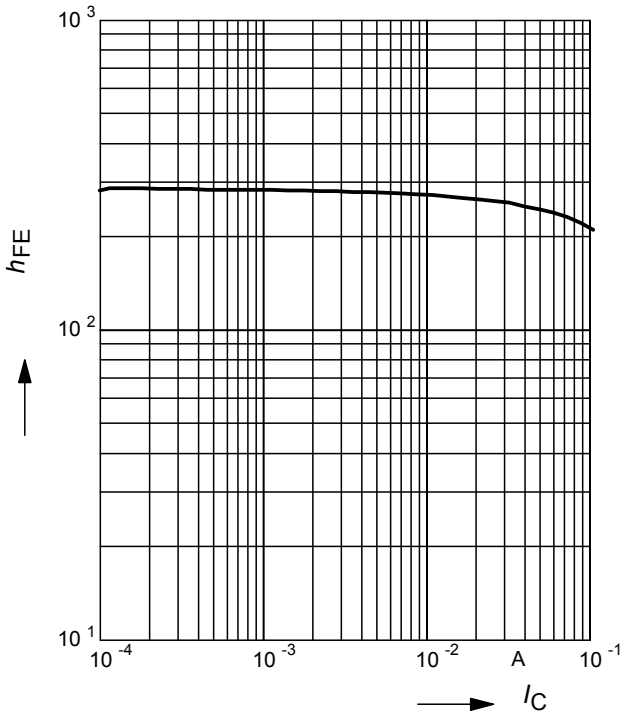


**Collector-emitter saturation voltage**

$V_{CEsat} = f(I_C), h_{FE} = 20$

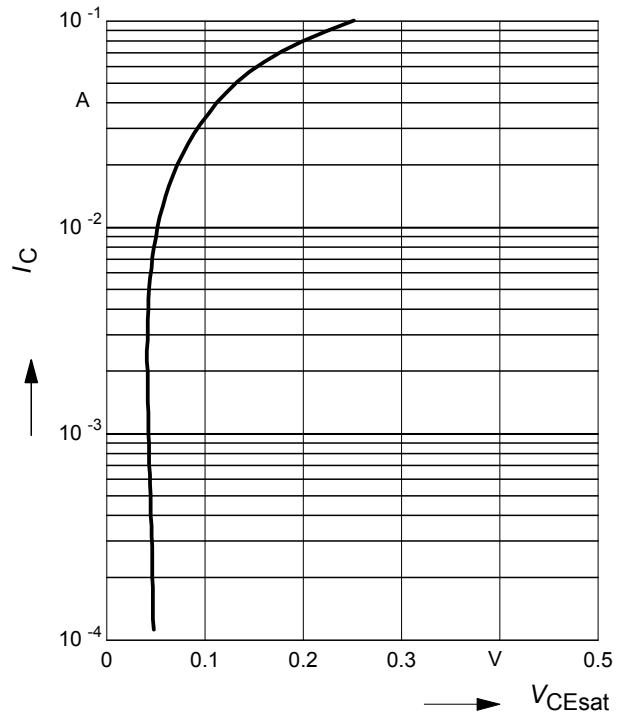


**Input on Voltage  $V_{i(on)} = f(I_C)$**

$V_{CE} = 0.3\text{ V}$  (common emitter configuration)

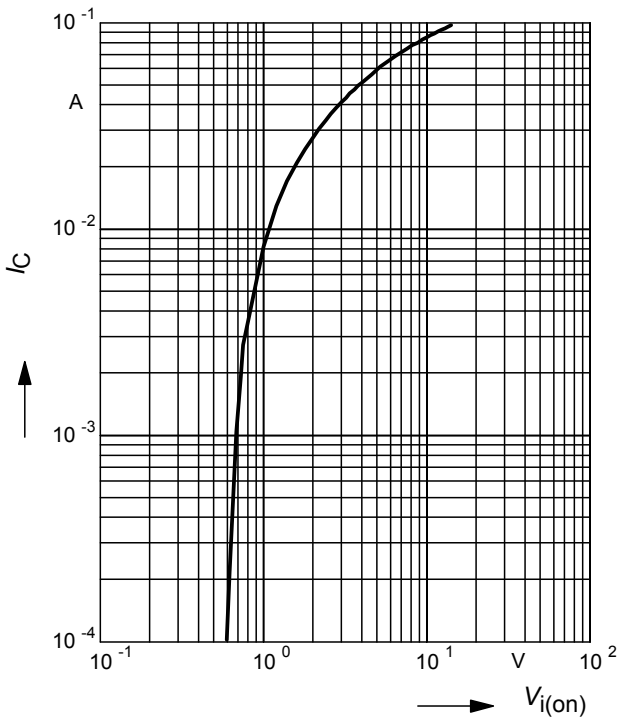


**Input off voltage  $V_{i(off)} = f(I_C)$**

$V_{CE} = 5\text{ V}$  (common emitter configuration)

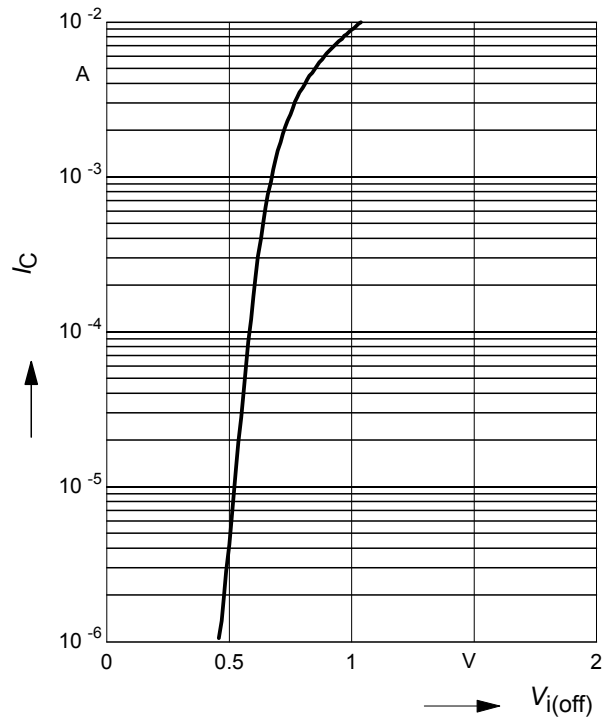


**Total power dissipation  $P_{tot} = f(T_S)$**

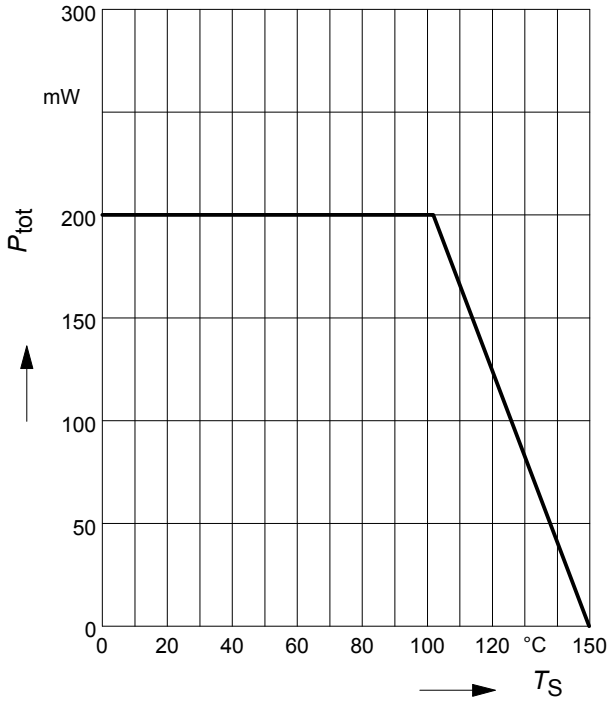


**Total power dissipation  $P_{tot} = f(T_S)$**

**BCR129F**

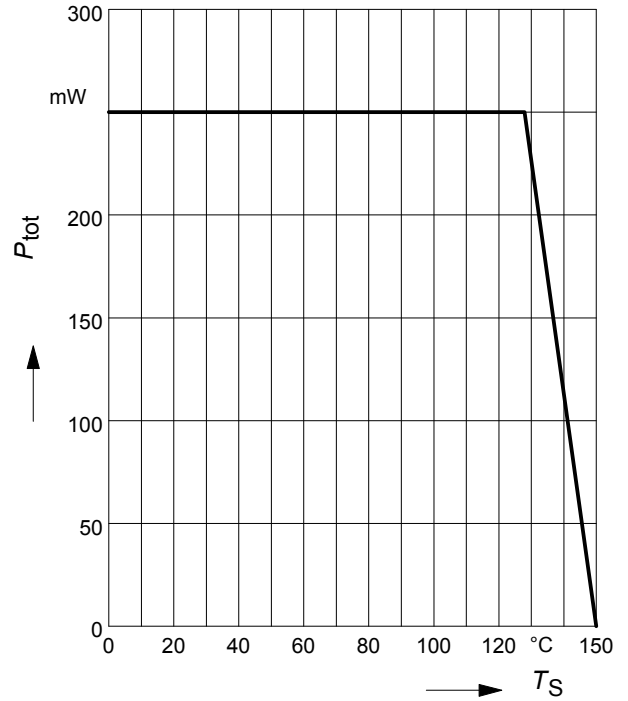


**Total power dissipation  $P_{tot} = f(T_S)$**

**BCR129L3**

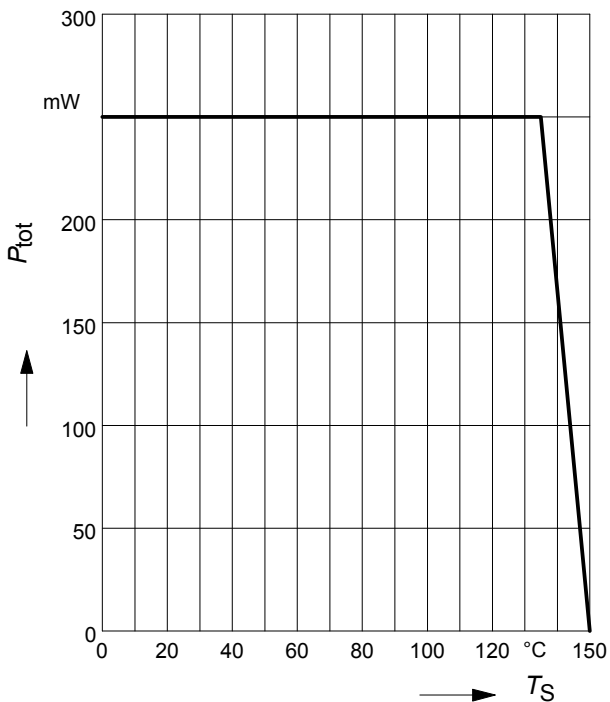


**Total power dissipation  $P_{tot} = f(T_S)$**

**BCR129S**

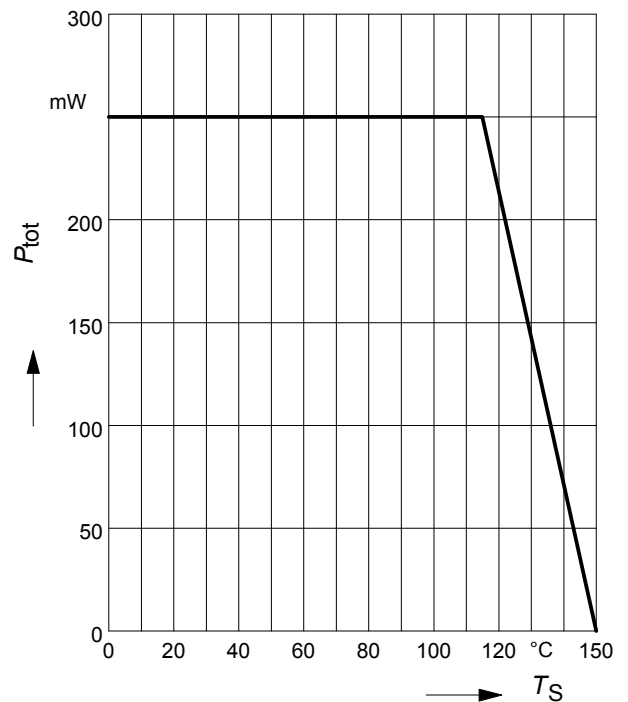


**Total power dissipation  $P_{tot} = f(T_S)$**

**BCR129T**

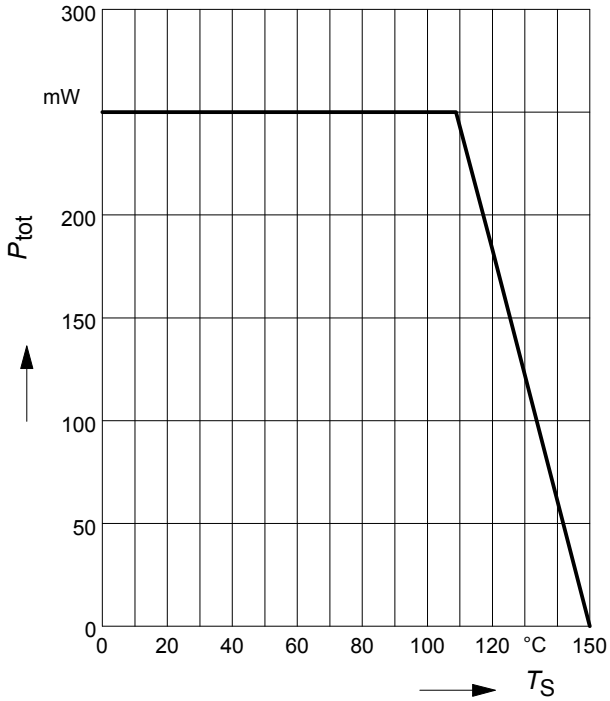


**Total power dissipation  $P_{tot} = f(T_S)$**

**BCR129W**

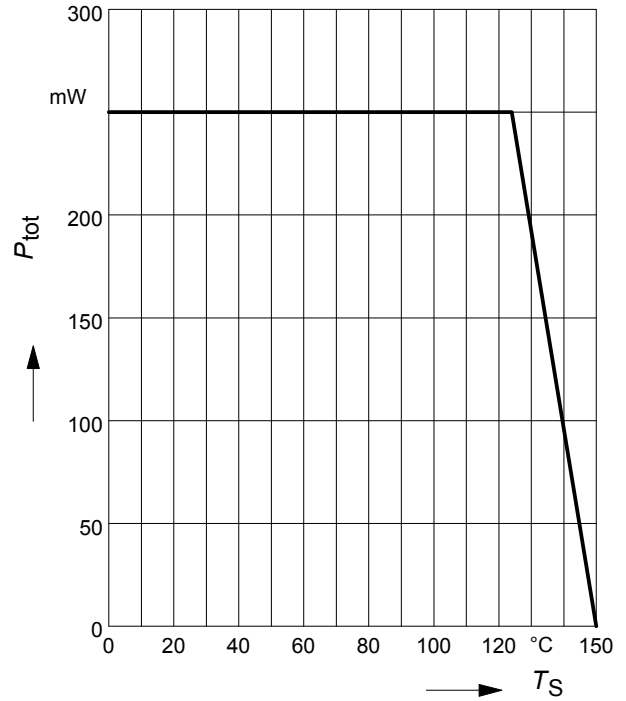


**Total power dissipation  $P_{tot} = f(T_S)$**

**SEM4**

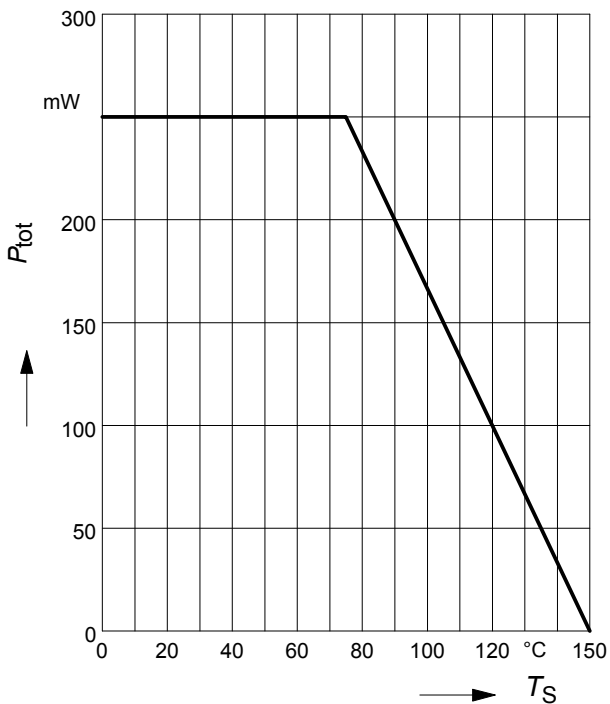

**Permissible Pulse Load  $R_{thJS} = f(t_p)$**


BCR129

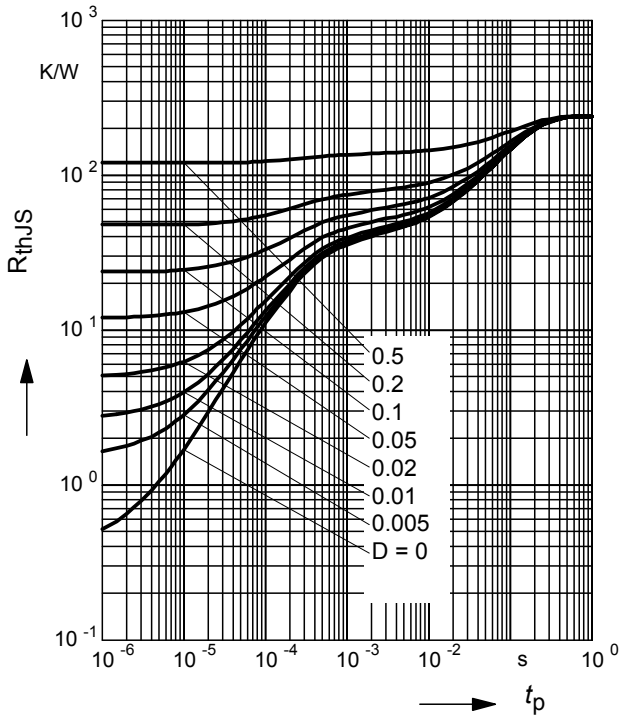

**Permissible Pulse Load**


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129

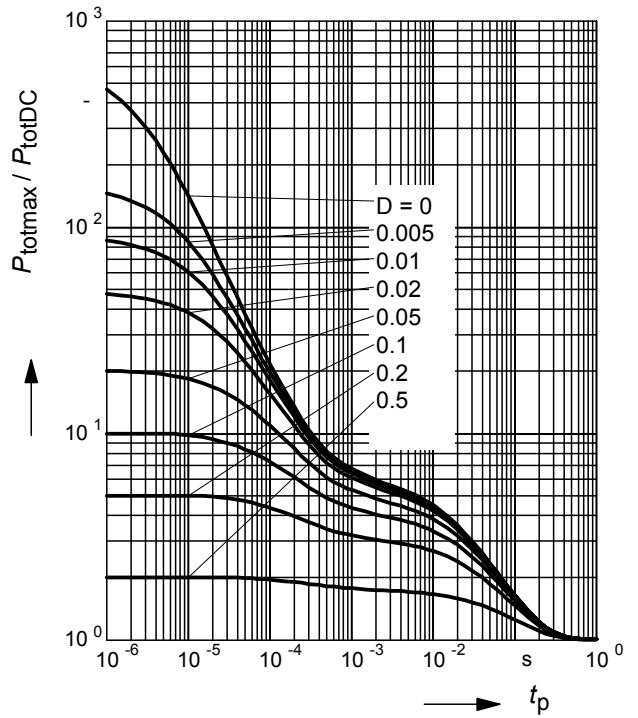

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BCR129F

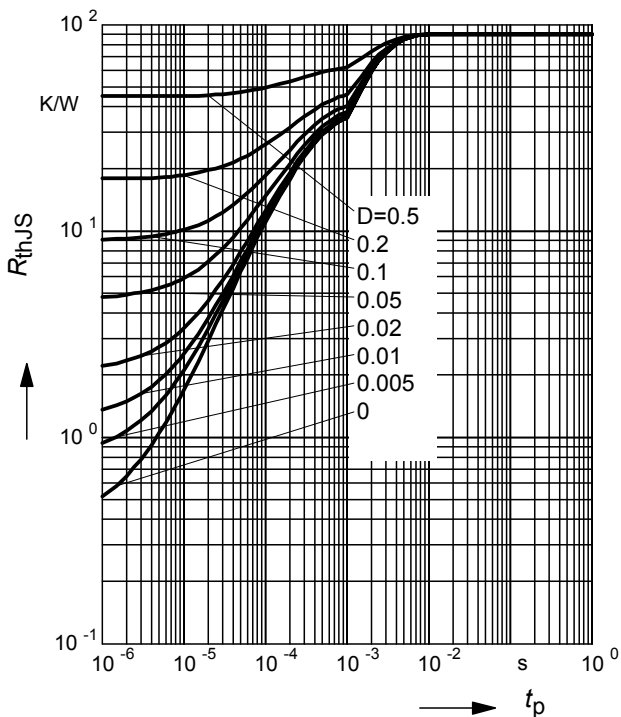

**Permissible Pulse Load**

$P_{totmax}/P_{totDC} = f(t_p)$


BCR129F

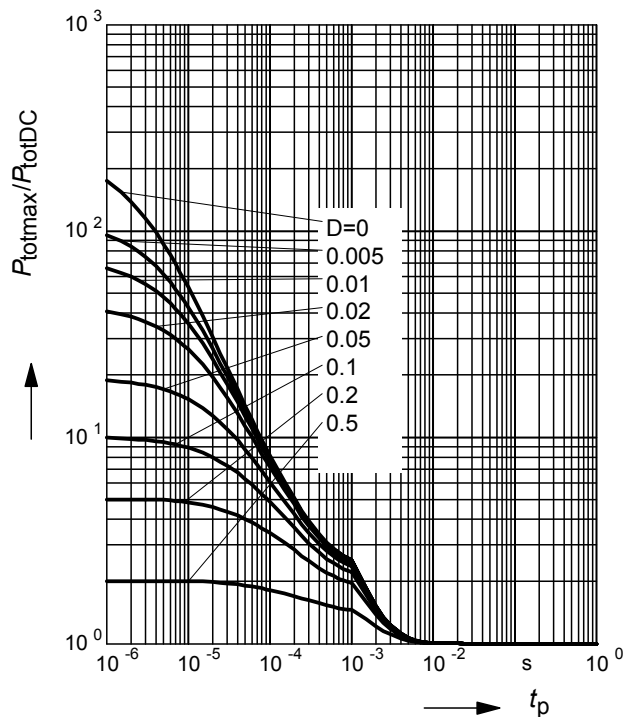



**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BCR129L3

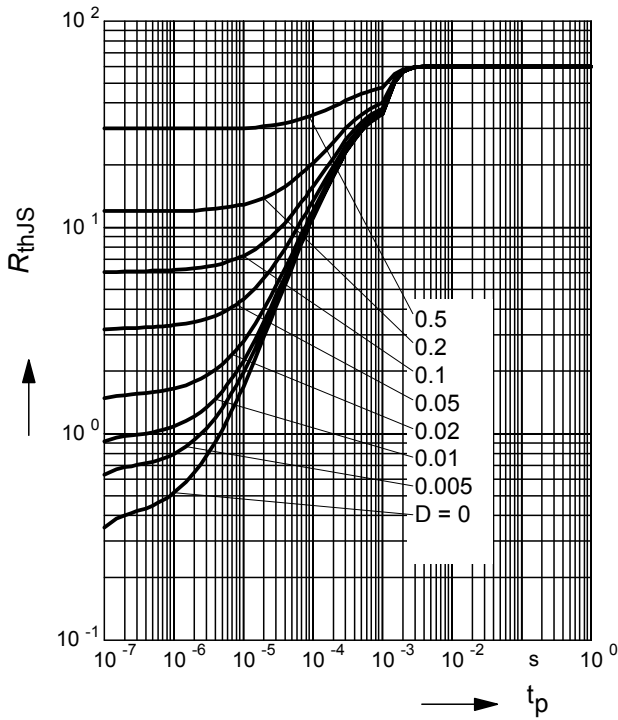

**Permissible Pulse Load**


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129L3

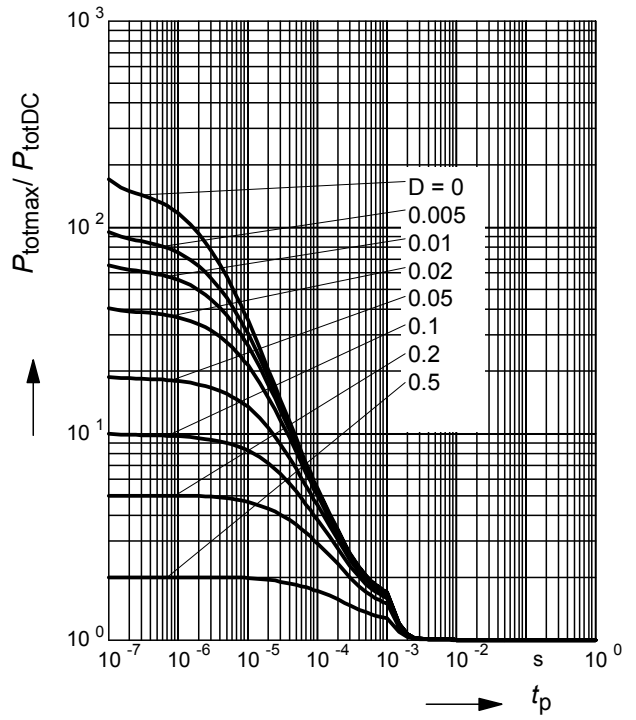

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BCR129S

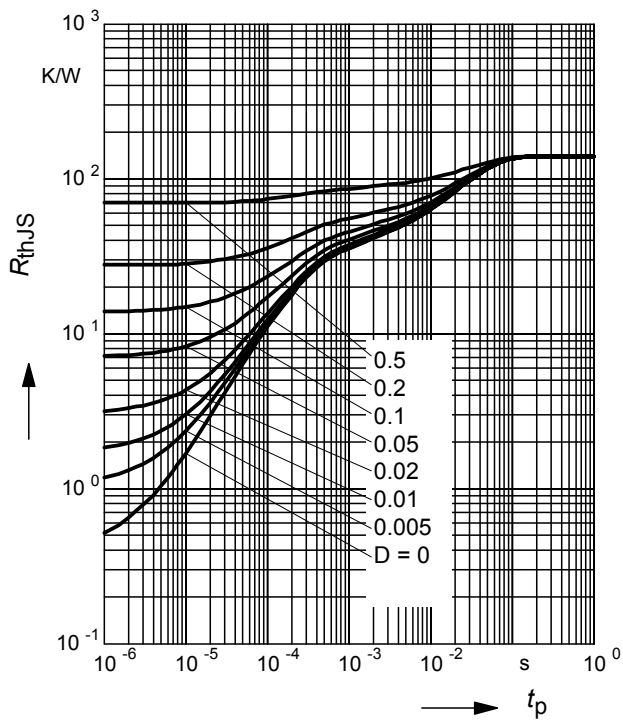

**Permissible Pulse Load**


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129S

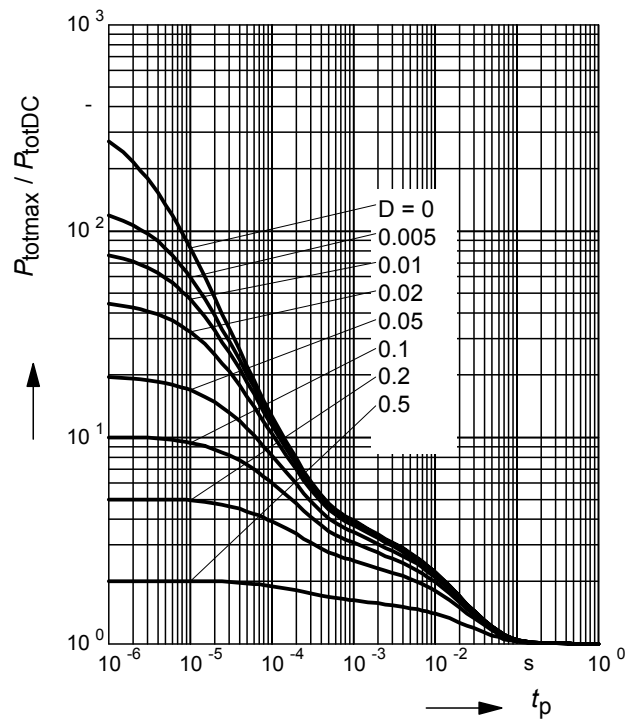

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BCR129T

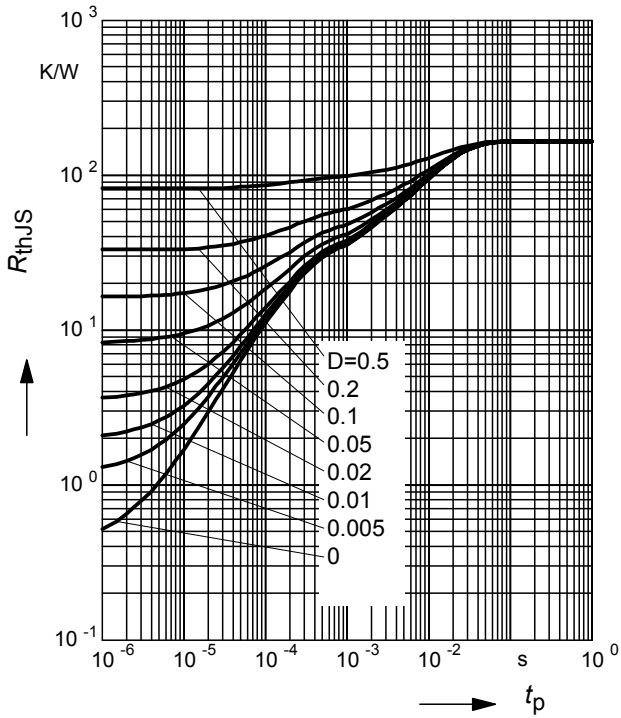

**Permissible Pulse Load**


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129T

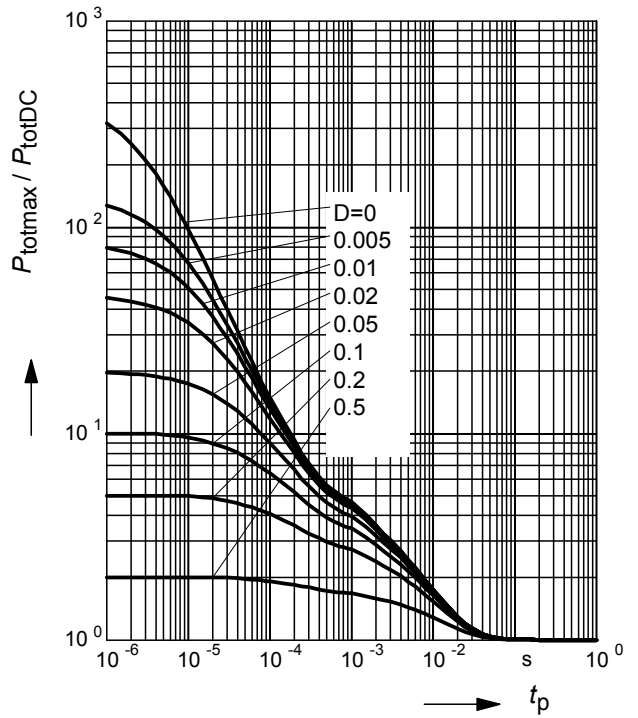

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BCR129W

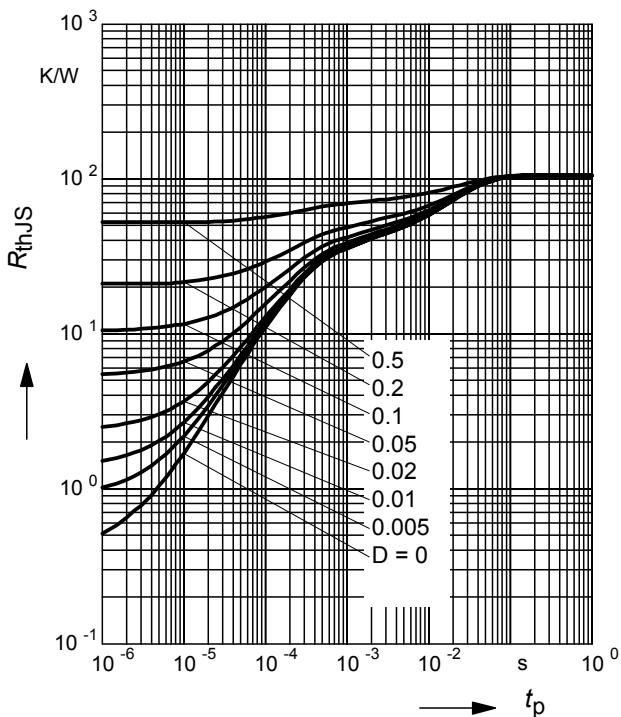

**Permissible Pulse Load**


$P_{totmax}/P_{totDC} = f(t_p)$

BCR129W

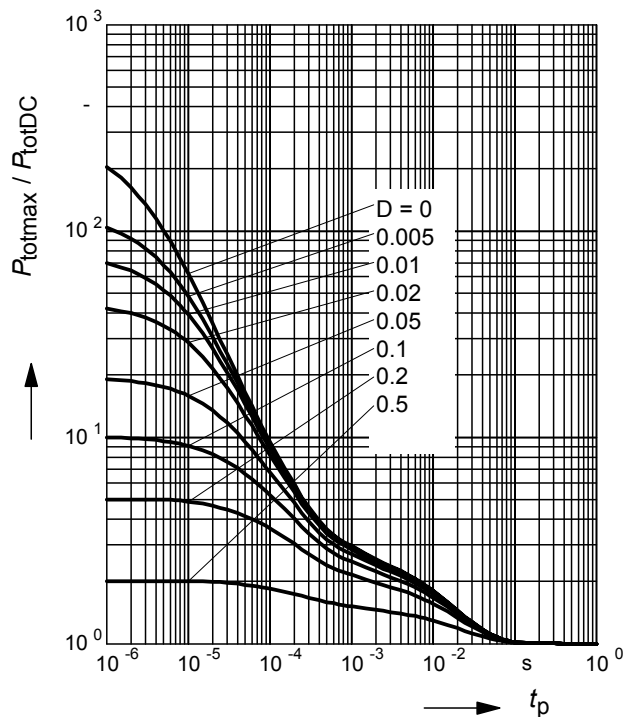

**Permissible Puls Load  $R_{thJS} = f(t_p)$**

SEMH4

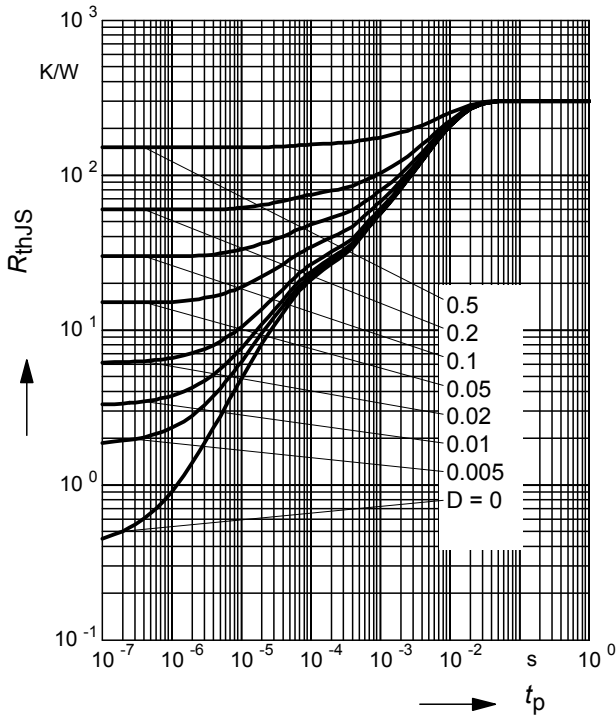

**Permissible Pulse Load**

$P_{totmax}/P_{totDC} = f(t_p)$

SEMH4

