

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

## Power MOSFET

## ■ GENERAL DESCRIPTION

The XP151A12A2MR-G is an N-channel Power MOSFET with low on state resistance and ultra high-speed switching characteristics.

Because high-speed switching is possible, the IC can be efficiently set thereby saving energy.

In order to counter static, a gate protect diode is built-in.

The small SOT-23 package makes high density mounting possible.

## ■ APPLICATIONS

- Notebook PCs
- Cellular and portable phones
- On-board power supplies
- Li-ion battery systems

## ■ FEATURES

**Low On-State Resistance** :  $R_{ds(on)} = 0.1 \Omega @ V_{gs} = 4.5V$   
 :  $R_{ds(on)} = 0.16 \Omega @ V_{gs} = 2.5V$

**Ultra High-Speed Switching**

**Gate Protect Diode Built-in**

**Driving Voltage** : 2.5V


**N-Channel Power MOSFET**

**DMOS Structure**

**Small Package** : SOT-23


**Environmentally Friendly** : EU RoHS Compliant, Pb Free

## ■ PIN CONFIGURATION/MARKING

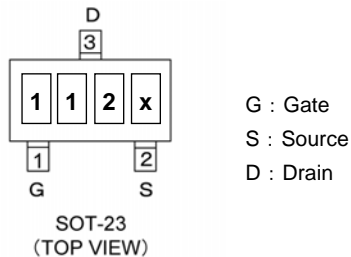

\* x represents production lot number.

## ■ EQUIVALENT CIRCUIT



## ■ PRODUCT NAMES

PRODUCTS	PACKAGE	ORDER UNIT
XP151A12A2MR	SOT-23	3,000/Reel
XP151A12A2MR-G <sup>(*)</sup>	SOT-23	3,000/Reel

<sup>(\*)</sup> The "-G" suffix denotes Halogen and Antimony free as well as being fully RoHS compliant.

## ■ ABSOLUTE MAXIMUM RATINGS

$T_a = 25^\circ C$			
PARAMETER	SYMBOL	RATINGS	UNITS
Drain - Source Voltage	$V_{dss}$	20	V
Gate - Source Voltage	$V_{gss}$	$\pm 12$	V
Drain Current (DC)	$I_d$	1	A
Drain Current (Pulse)	$I_{dp}$	4	A
Reverse Drain Current	$I_{dr}$	1	A
Channel Power Dissipation *	$P_d$	0.5	W
Channel Temperature	$T_{ch}$	150	$^\circ C$
Storage Temperature	$T_{stg}$	-55~150	$^\circ C$

\* When implemented on a ceramic PCB

## ELECTRICAL CHARACTERISTICS

### DC Characteristics

Ta = 25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Drain Cut-Off Current	Idss	Vds= 20V, Vgs= 0V	-	-	10	μA
Gate-Source Leak Current	Igss	Vgs= ±12V, Vds= 0V	-	-	±10	μA
Gate-Source Cut-Off Voltage	Vgs(off)	Id= 1mA, Vds= 10V	0.7	-	1.4	V
Drain-Source On-State Resistance *1	Rds(on)	Id= 0.5A, Vgs= 4.5V	-	0.075	0.1	Ω
		Id= 0.5A, Vgs= 2.5V	-	0.120	0.160	Ω
Forward Transfer Admittance *1	Yfs	Id= 0.5A, Vds= 10V	-	3.3	-	S
Body Drain Diode Forward Voltage	Vf	If= 1A, Vgs= 0V	-	0.8	1.1	V

\*1 Effective during pulse test.

### Dynamic Characteristics

Ta = 25°C

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Input Capacitance	Ciss	Vds= 10V, Vgs=0V f= 1MHz	-	180	-	pF
Output Capacitance	Coss		-	120	-	pF
Feedback Capacitance	Crss		-	45	-	pF

### Switching Characteristics

Ta = 25°C


PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Turn-On Delay Time	td (on)	Vgs= 5V, Id= 0.5A Vdd= 10V	-	10	-	ns
Rise Time	tr		-	15	-	ns
Turn-Off Delay Time	td (off)		-	50	-	ns
Fall Time	tf		-	45	-	ns

### Thermal Characteristics


PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Thermal Resistance (Channel-Ambience)	Rth (ch-a)	Implement on a ceramic PCB	-	250	-	°C/W

## TYPICAL PERFORMANCE CHARACTERISTICS


(1) Drain Current vs. Drain-Source Voltage

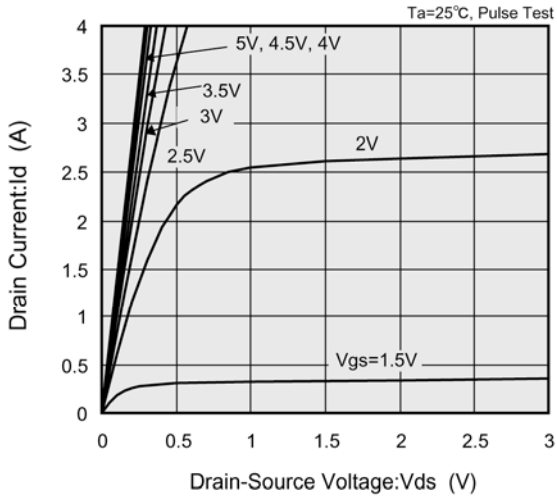


(2) Drain Current vs. Gate-Source Voltage

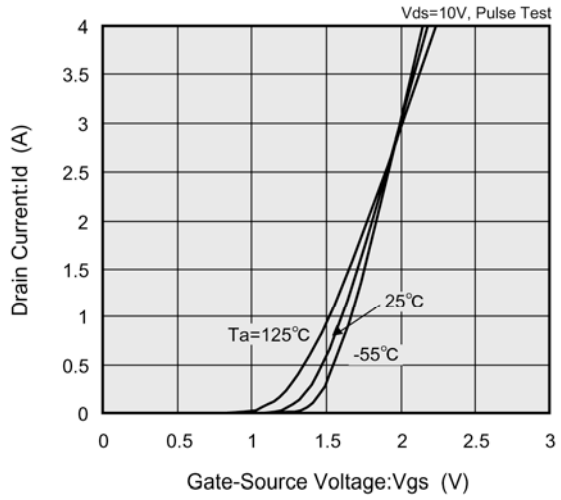


(3) Drain-Source On-State Resistance vs. Gate-Source Voltage

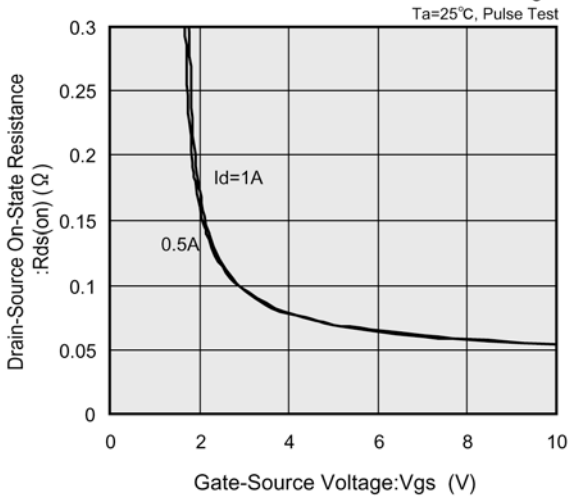


(4) Drain-Source On-State Resistance vs. Drain Current

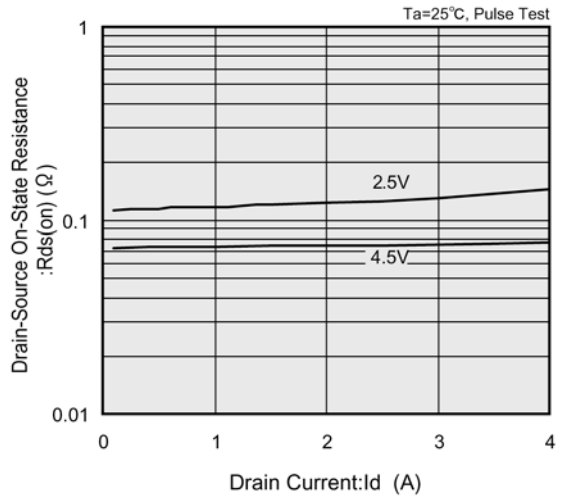

(5) Drain-Source On-State Resistance vs. Ambient Temperature

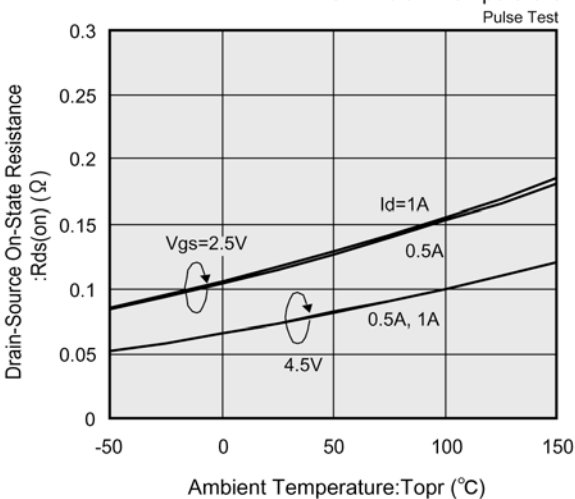


(6) Gate Source Cut-Off Voltage Variance vs. Ambient Temperature

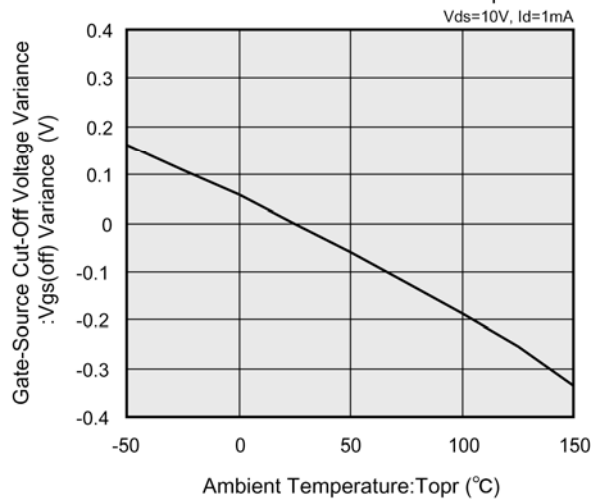


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(7) Capacitance vs. Drain-Source Voltage

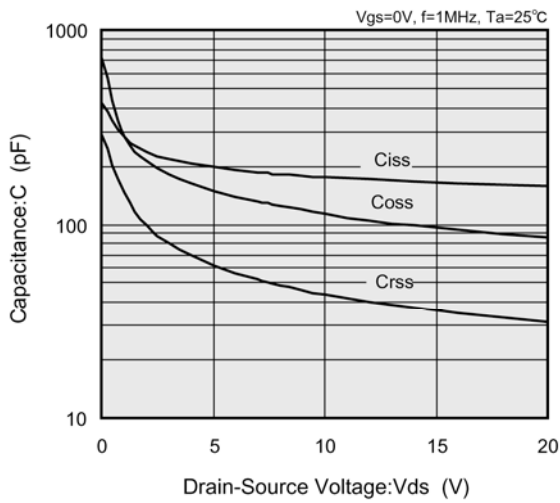


(8) Switching Time vs. Drain Current

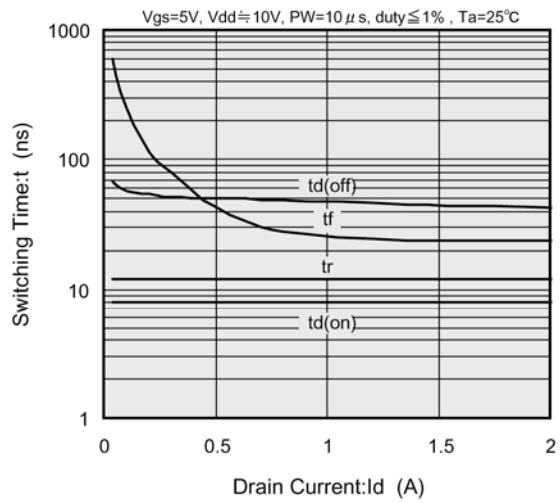


(9) Gate-Source Voltage vs. Gate Charge

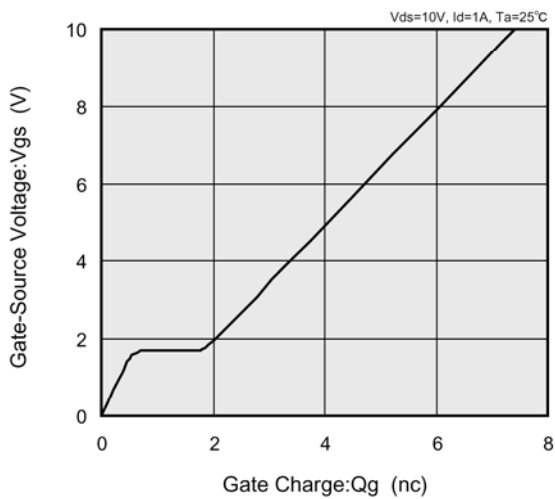

(10) Reverse Drain Current vs. Source-Drain Voltage

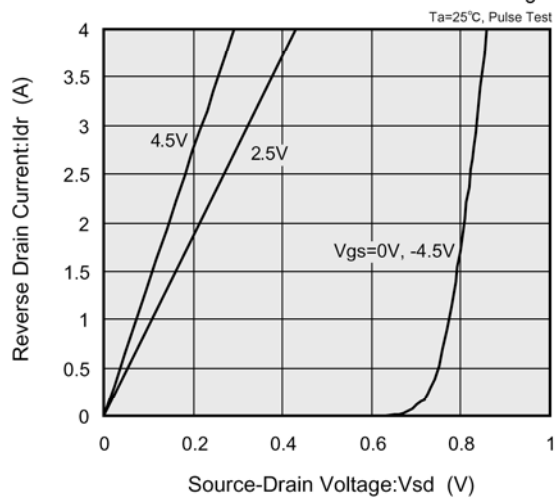

(11) Standardized transition Thermal Resistance vs. Pulse Width

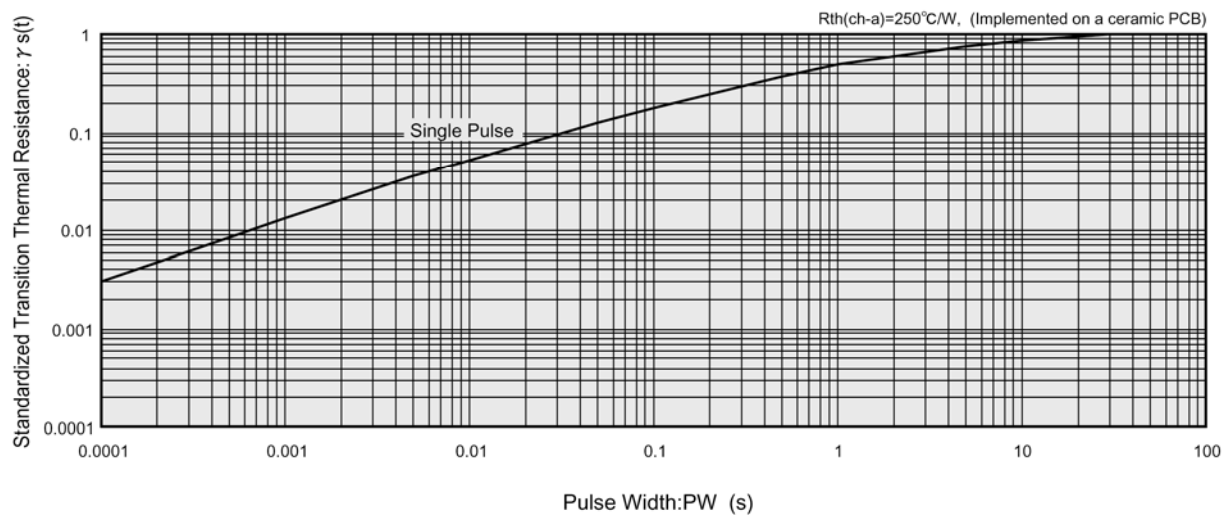

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet .
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet .
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure or malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.  
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.  
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

**TOREX SEMICONDUCTOR LTD.**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Torex Semiconductor:](#)

[XP151A12A2MR-G](#)