

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

7mm TYPE 7P


Frequency Range: 200kHz-2MHz

Inductance Range: 10 μ H-2.6mH

Temperature Coefficient: Inductor TC (L) 750 \pm 500ppm/ $^{\circ}$ C

With Internal Capacitor TC (F) 0 \pm 250ppm/ $^{\circ}$ C

Internal Capacitance Value: 150-390pF⁽¹⁾

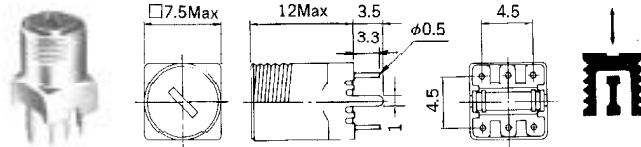

(Unit: mm)

Features

- Ideal for use as an AM IFT and in oscillator circuits.
- Unique design features a cup core adjuster, threaded directly into the shield can, allowing the use of larger cores. This produces the superior, large signal characteristics typically associated with 10mm types.

STANDARD COILS SELECTION GUIDE

(1) Cross slit core (Philips type) also available upon request.

TYPE 7P

TOKO Part Number	Inductance Range (μ H)	Turns Ratio		Q (min.)	Test Frequency (MHz)
		1-3/1-2	1-3/4-6		
7BR-151208N0	150 \pm 8%	65:2	65:8	60	1.4
7BR-271208N0	270 \pm 8%	43:1	43:4	60	1.4
7BR-271308N0	270 \pm 8%	86:3	43:4	60	1.4
7BR-331208N0	330 \pm 8%	95:2	95:8	60	1.4
7BR-331308N0	330 \pm 8%	95:3	95:8	60	1.4
7BR-361208N0	360 \pm 8%	50:1	25:2	60	1.4
7BR-361308N0	360 \pm 8%	100:3	25:2	60	1.4
A7BRS-T1040Z	100 \pm 10%			80	0.796
A7BRS-T1041Z	120 \pm 10%			80	0.796
A7BRS-T1042Z	150 \pm 10%			80	0.796
A7BRS-T1043Z	180 \pm 10%			80	0.796
A7BRS-T1044Z	220 \pm 10%			80	0.796
A7BRS-T1045Z	270 \pm 10%			80	0.796
A7BRS-T1046Z	330 \pm 10%			80	0.796

TYPE 7P with Internal Capacitor

TOKO Part Number	Tuning Capacitance (pf)	Turns Ratio		Q (min.)	Test Frequency (kHz)
		1-3/2-3	1-3/4-6		
7LC-252142N0	180+5(ext)	146:37	146:20	70	455
7LC-252203N0	180+5(ext)	146:37	146:3	70	455
7LC-352142N0	180+5(ext)	146:52	146:20	70	455
7LC-352203N0	180+5(ext)	146:52	146:3	70	455
7LC-352353N0	180+5(ext)	146:52	146:5	70	455
7LC-352503N0	180+5(ext)	146:52	146:7	70	455
7LC-352713N0	180+5(ext)	146:52	146:10	70	455
7LC-452503N0	180+5(ext)	146:66	146:7	70	455
7MC-162503N0	180+5(ext)	146:23	146:7	110	455
7MC-202503N0	180+5(ext)	146:29	146:7	110	455
7MC-222162N0	180+5(ext)	146:33	146:23	110	455
7MC-312162N0	180+5(ext)	146:46	146:23	110	455
7MC-402353N0	180+5(ext)	146:58	146:5	110	455
7MC-402503N0	180+5(ext)	146:58	146:7	110	455
7MC-402563N0	180+5(ext)	146:58	146:8	110	455
7MC-452252N0	180+5(ext)	146:66	146:37	110	455
7MC-502503N0	180+5(ext)	146:73	146:7	110	455