

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

7mm TYPE 7P High Frequency

7mm TYPE 7P High Frequency with Internal Capacitor⁽¹⁾


Frequency Range: 2–20MHz

Inductance Range: 1–82μH

Temperature Coefficient of : Inductor TC (L) 220±220ppm/°C

With Internal Capacitor TC (F) 0±250ppm/°C

Internal Capacitance Values: 5-100pF⁽¹⁾

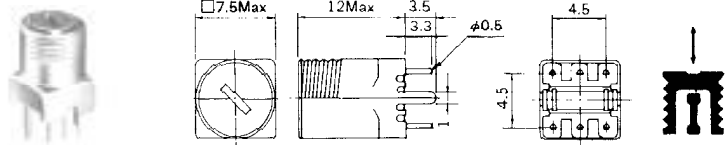

Unit: mm

Features

- Ideal for use as an FM IFT and in detector circuits.
- Unique design features a cup core adjuster, threaded directly into the shield can, allowing the use of larger cores. This produces the superior, large signal characteristics typically associated with 10mm types.

STANDARD COILS SELECTION GUIDE

(1) Cross slit core (Philips type) also available upon request.

TYPE 7P High Frequency

TOKO Part Number	Inductance Range (μH)	Q (min.)	Test Frequency (MHz)
A119ANS-T1029Z	4.7±10%	80	7.96
A119ANS-T1030Z	5.6±10%	80	7.96
A119ANS-T1031Z	6.8±10%	80	7.96
A119ANS-T1032Z	8.2±10%	80	7.96
A119ANS-T1033Z	10.0±10%	80	2.52
A119ANS-T1034Z	12.0±10%	80	2.52
A119ANS-T1035Z	15.0±10%	80	2.52
A119ANS-T1036Z	18.0±10%	80	2.52
A119ANS-T1037Z	22.0±10%	80	2.52
A119ANS-T1038Z	27.0±10%	80	2.52
A119ANS-T1039Z	33.0±10%	80	2.52
A119ANS-T1040Z	39.0±10%	80	2.52
A119ANS-T1041Z	47.0±10%	80	2.52
A119ANS-T1042Z	56.0±10%	80	2.52
A119ANS-T1043Z	68.0±10%	80	2.52
A119ANS-T1044Z	82.0±10%	80	2.52

TYPE 7P High Frequency with Internal Capacitor

TOKO Part Number	Turns Ratio:			Tuning Capacitance (pF)	Q	Test Frequency (MHz)
	1-3/2-3	1-3/4-6	Others			
119AC-470033N0	14:3	14:3		47+5(ext)	100±20%	10.7
119AC-470052N0	14:5	14:2		47+5(ext)	110±20%	10.7
119AC-470072N0	14:7	14:2		47+5(ext)	110±20%	10.7
119AC-470073N0	14:7	14:3		47+5(ext)	110±20%	10.7
119AC-470084L0				47+3(ext)	90±20%	10.7
119AC-470112N0	14:11	14:2		47+5(ext)	120±20%	10.7
119AC-750111M0			2-3/4-6 11:1	75+5(ext)	100±20%	10.7
119AC-750112M0			2-3/4-6 11:2	75+5(ext)	100±20%	10.7
119FC-560061N0	12:6	12:1		56+0(ext)	120±20%	10.7
119FC-820051N0	10:5	10:1		82+0(ext)	110±20%	10.7
119LC-470033N0	14:3	14:3		47+5(ext)	65±20%	10.7
119LC-470053N0	14:5	14:3		47+5(ext)	70±20%	10.7
119LC-470073N0	14:7	14:3		47+5(ext)	70±20%	10.7