

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# Specification

Spec No. : **FXP270**  
 Part No. : **FXP270.07.0100A**  
 Model : 784MHz ISM Band Flex Circuit Antenna  
 Features : 75\*45\*0.1mm  
 100mm Ø1.13 Cable  
**RoHS ✓**



VERSION	DATE	PAGE	DESCRIPTION	CENTRE	APPROVED
A	09/21/2009	All	Antenna Specifications	Taiwan	Ruben F. Cuadras

## I. OVERVIEW

The Taoglas FXP270 784 MHz ISM Band Antenna covers from 779-787 MHz used in the 784 MHz ISM (Industrial Scientific Medical) Chinese Band. The antenna has been designed in a flexible material with a square form-factor and cable connection for an easy installation. The antenna works on different plastic materials and thickness. We have selected a piece of ABS with 2 mm of thickness as a baseline for testing.

## II. ANTENNA CHARACTERISTICS

Parameter	Specification
Frequency Range	779MHz to 787MHz
Return Loss (dB)	-20
Efficiency (%)	40
Gain (dBi)	1.4
Impedance	50 $\Omega$
VSWR	$\leq 2:1$
Polarization	Linear
Power Handled	5W
Operation Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +85°C
Dimensions	75*45*0.1mm
Weight	1.5g
Connector	MHFII (U.FL Compatible)
Cable Standard	Mini-Coax 1.13 mm
Cable Length and color	100mm, Black
RoHS Compliant	Yes
Adhesive	3M 467

### III. TEST SET UP

An ETS-Lindgren 3D Scan System with Anechoic Chamber

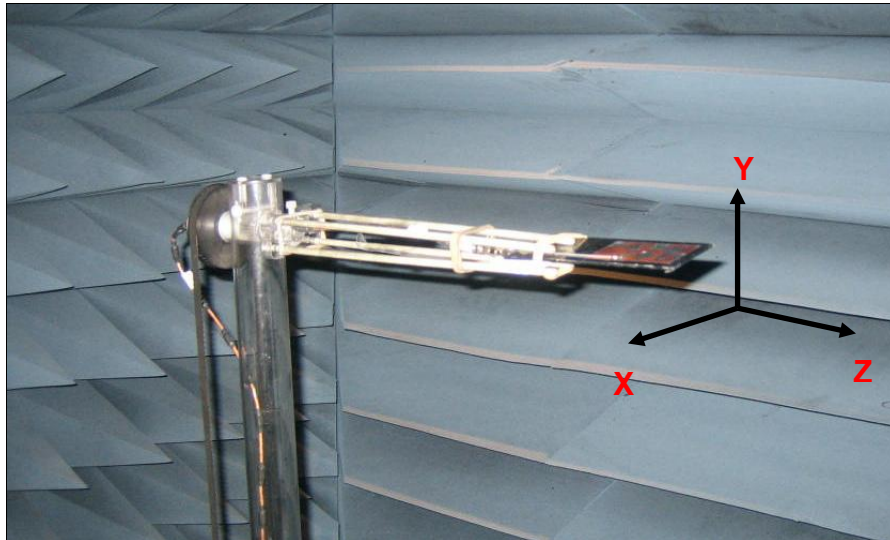


Figure 1. ETS-Lindgren System.

Rhode & Schwartz ZVL6 Vector Network Analyzer

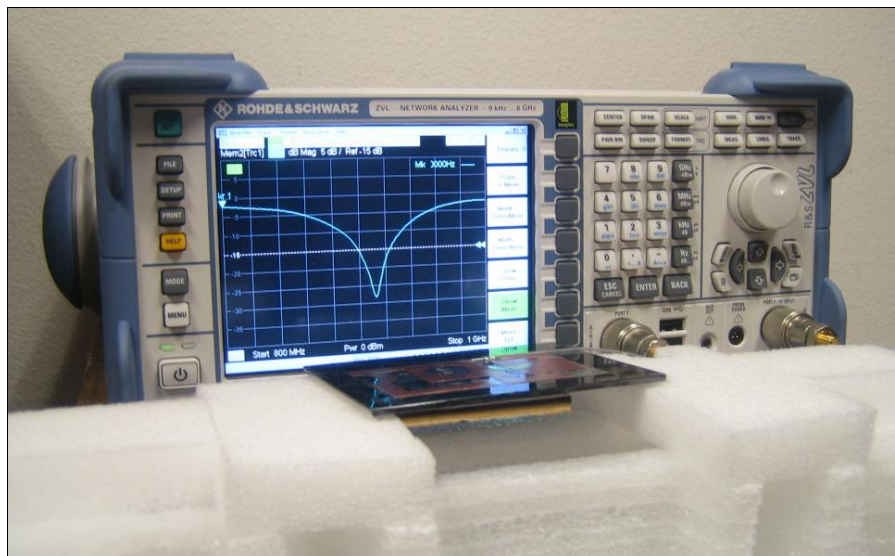


Figure 2. Network Analyzer.

## IV. ANTENNA PARAMETERS

The next antenna parameter graphs like Return Loss, VSWR and smith chart were measured in the Agilent Rhode & Schwartz ZVL6 Vector Network Analyzer. The Gain, Efficiency and Radiation Patterns were measured in the ETS-Lindgren 3D Scan System.

### A. Return Loss Data

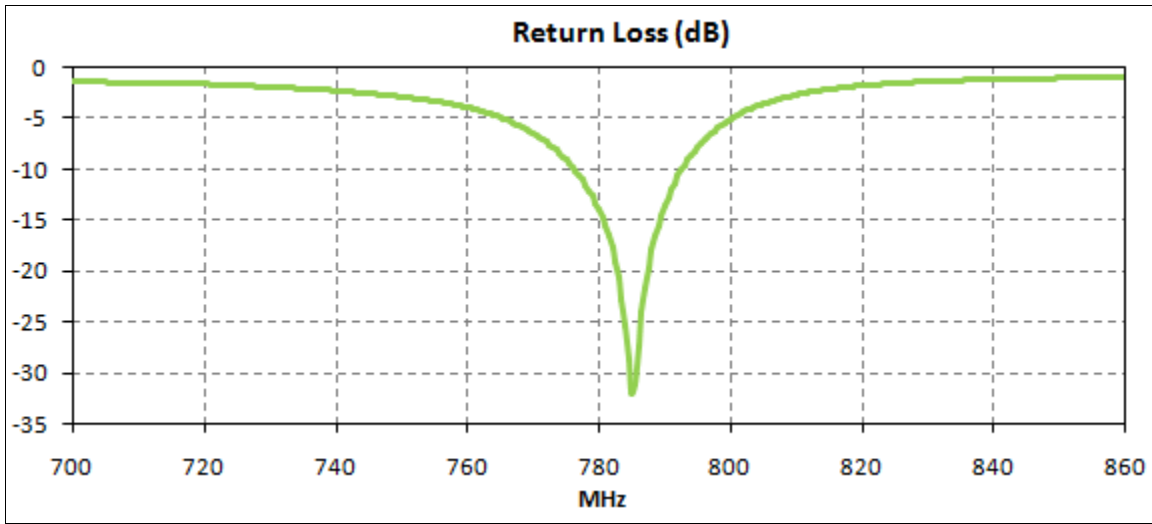


Figure 3. Return Loss for the FXP270 Antenna.

### B. VSWR Data

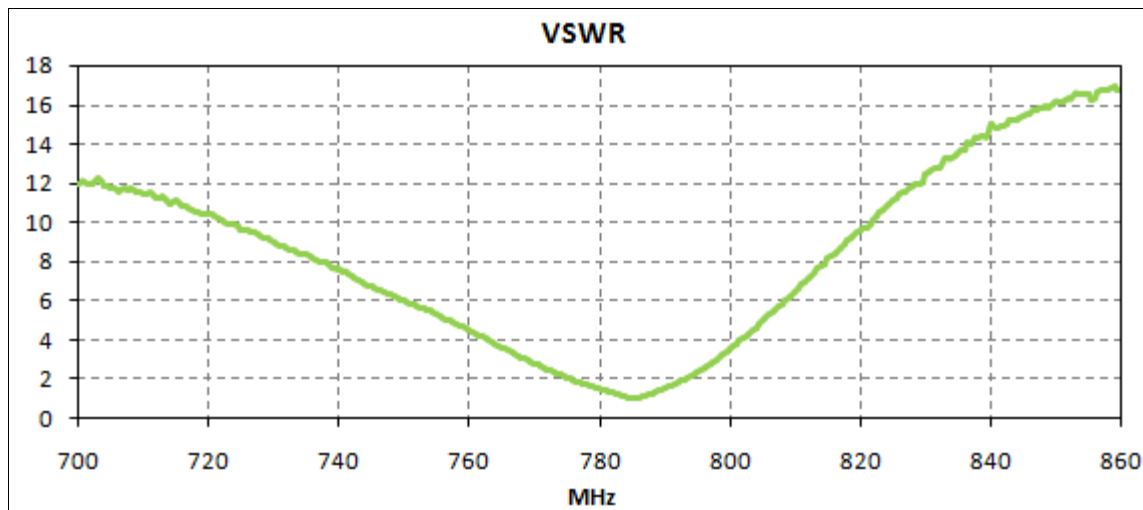


Figure 4. VSWR for the FXP270 Antenna.

### C. Smith Chart Data

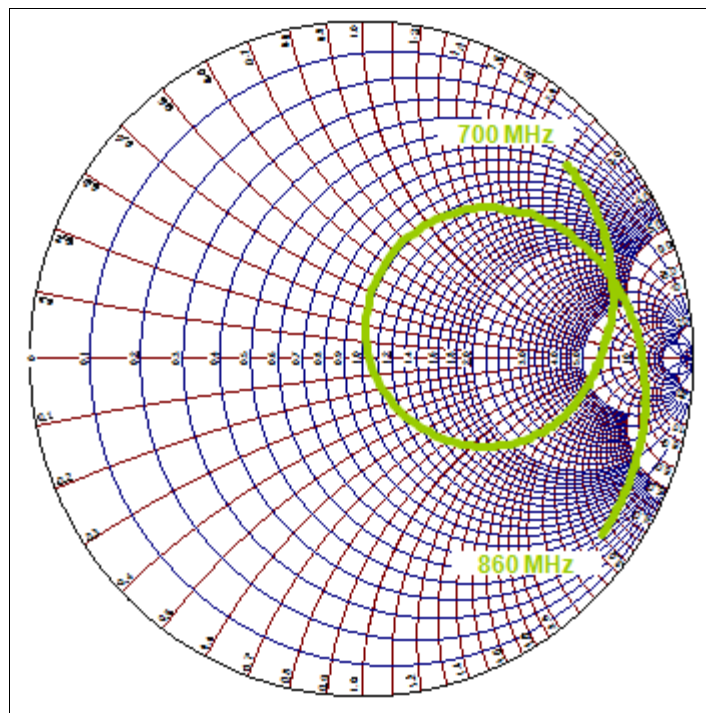


Figure 5. Smith Chart for the FXP270 Antenna.

### D. Efficiency Data

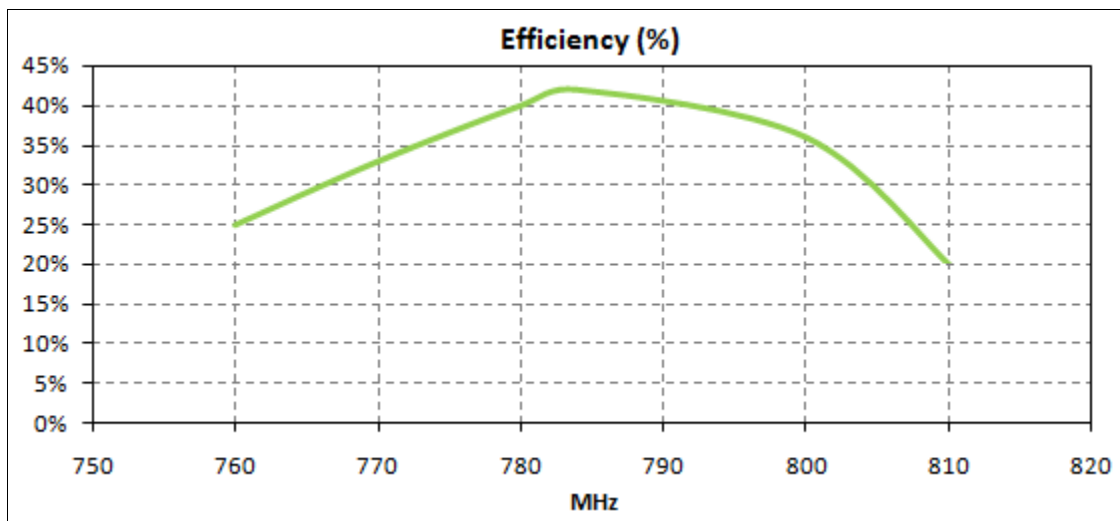


Figure 6. Efficiency for the FXP270 Antenna.

### E. Gain Data

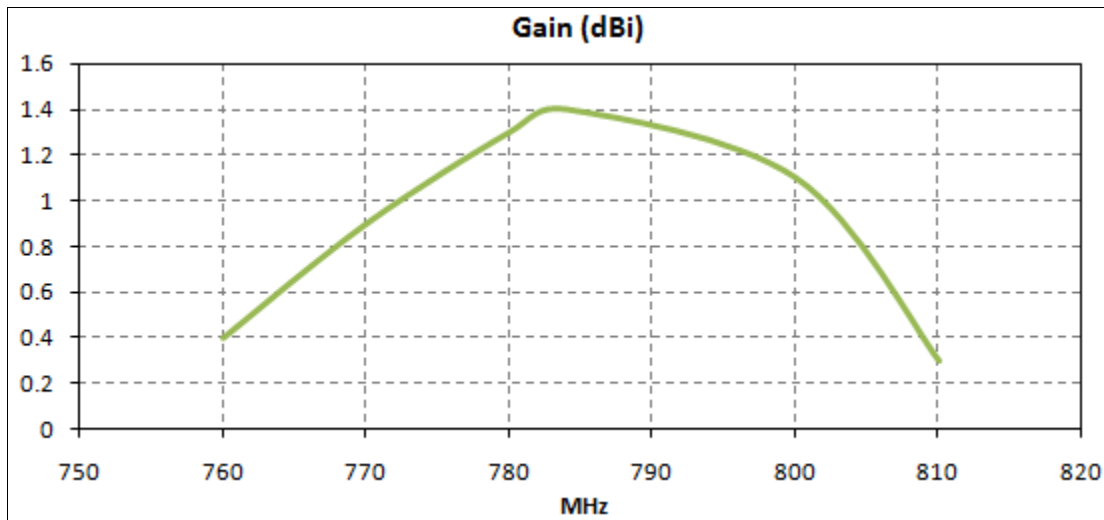


Figure 7. Gain for the FXP270 Antenna.

### F. Radiation Pattern Data.

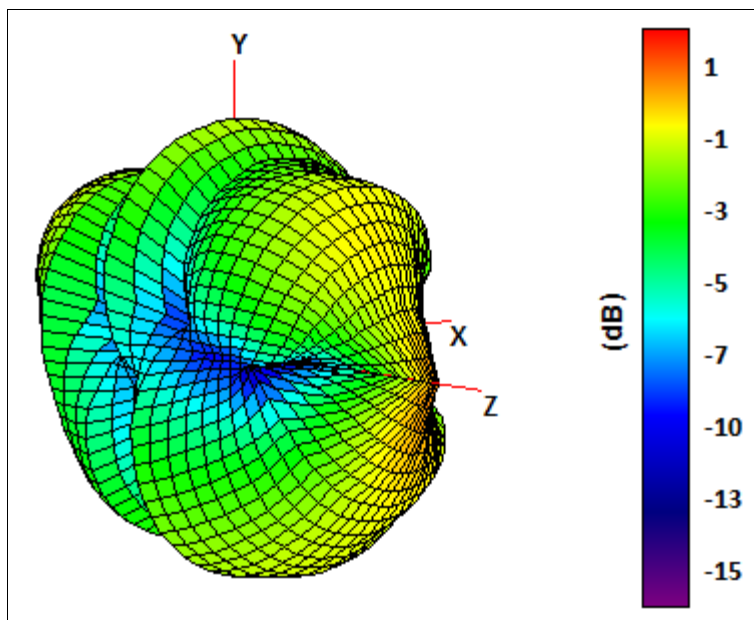
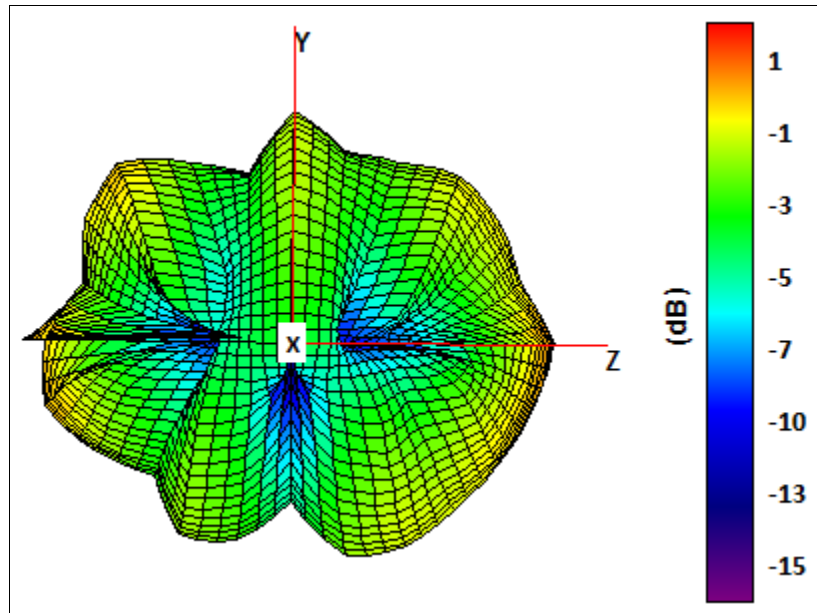
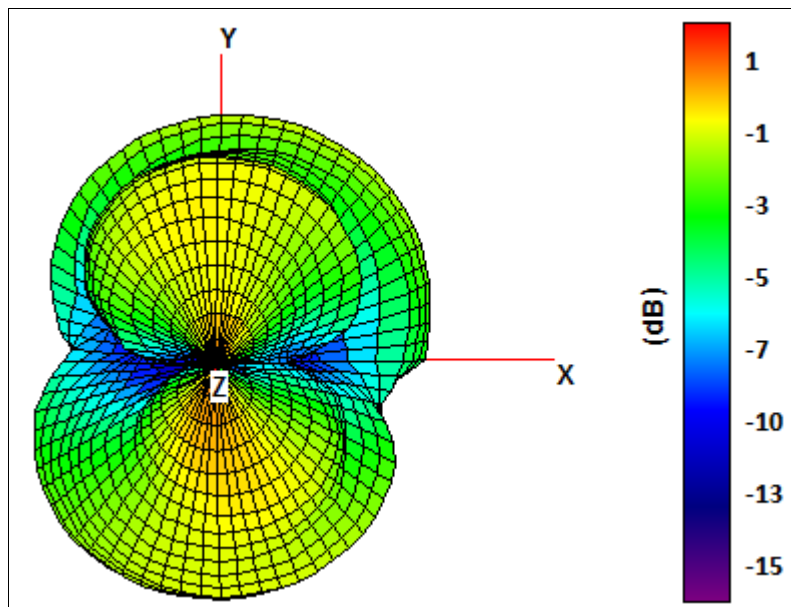


Figure 8. Radiation pattern 3D View, Figure 1 as reference (dB).

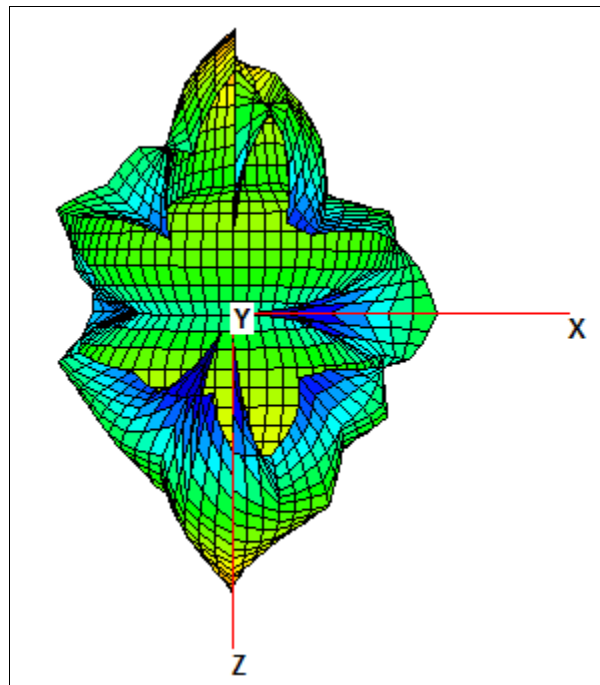


**Figure 9.** Radiation pattern YZ Plane, Figure 1 as reference (dB).



**Figure 10.** Radiation pattern XY plane, Figure 1 as reference (dB).





**Figure 11.** Radiation pattern XY plane, Figure 1 as reference (dB).