

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

## Current Transducer HXS 20-NP/SP2

For the electronic measurement of currents : DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



All Data are given with a  $R_L = 10\text{ k}\Omega$

### Electrical data

$I_{PN}$	Primary nominal current rms	$\pm 20$	A
$I_{PM}$	Primary current, measuring range	$\pm 60$	A
$V_{OUT}$	Output voltage (Analog) @ $I_p$	$V_{REF} \pm (0.625 \cdot I_p / I_{PN})$	V
	$I_p = 0$	$V_{REF} \pm 0.0125$	V
$V_{REF}$	Reference voltage <sup>1)</sup> - Output voltage	$2.5 \pm 0.025$	V
	$V_{REF}$ Output impedance	typ. 200	$\Omega$
	$V_{REF}$ Load impedance	$\geq 200$	k $\Omega$
$R_L$	Load resistance	$\geq 2$	k $\Omega$
$R_{OUT}$	Output internal resistance	$< 10$	$\Omega$
$C_L$	Capacitive loading	$< 1$	$\mu\text{F}$
$V_C$	Supply voltage ( $\pm 5\%$ )	5	V
$I_C$	Current consumption @ $V_C = 5\text{ V}$	22	mA

### Accuracy - Dynamic performance data

$X$	Accuracy <sup>2)</sup> @ $I_{PN}, T_A = 25^\circ\text{C}$	$\leq \pm 1$	% of $I_{PN}$
$e_L$	Linearity error 0.. $I_{PN}$	$\leq \pm 0.5$	% of $I_{PN}$
	.. $3 \times I_{PN}$	$\leq \pm 1$	% of $I_{PN}$
$TCV_{OE}$	Temperature coefficient of $V_{OE}$ @ $I_p = 0$	$\leq \pm 0.4$	mV/K
$TCV_{REF}$	Temperature coefficient of $V_{REF}$	$\leq \pm 0.01$	%/K
$TCV_{OUT/V_{REF}}$	Temperature coefficient of $V_{OUT}/V_{REF}$ @ $I_p = 0$	$\leq \pm 0.2$	mV/K
$TCV_{OUT}$	Temperature coefficient of $V_{OUT}$	$\leq \pm 0.05\%$	of reading/K
$V_{OM}$	Magnetic offset voltage @ $I_p = 0$ , after an overload of $3 \times I_{PN}$	$< \pm 0.7$	% of $I_{PN}$
$t_{ra}$	Reaction time @ 10 % of $I_{PN}$	$< 3$	$\mu\text{s}$
$t_r$	Response time to 90 % of $I_{PN}$ step	$< 5$	$\mu\text{s}$
$di/dt$	di/dt accurately followed	$> 50$	A/ $\mu\text{s}$
$V_{no}$	Output voltage noise (DC .. 10 kHz)	$< 20$	mVpp
	(DC .. 1 MHz)	$< 40$	mVpp
<b>BW</b>	Frequency bandwidth (-3 dB) <sup>3)</sup>	DC .. 50	kHz

### General data

$T_A$	Ambient operating temperature	- 40 .. + 105	$^\circ\text{C}$
$T_S$	Ambient storage temperature	- 40 .. + 105	$^\circ\text{C}$
$m$	Mass	10	g
	Standards	EN 50178: 1997	

**Notes** : <sup>1)</sup> It is possible to overdrive  $V_{REF}$  with an external reference voltage between 2 - 2.8 V providing its ability to sink or source approximately 2.5 mA.

<sup>2)</sup> Excluding offset and hysteresis.

<sup>3)</sup> Small signal only to avoid excessive heatings of the magnetic core.

$I_{PN} = 5 - 10 - 20\text{ A}$



### Features

- Hall effect measuring principle
- Multirange current transducer through PCB pattern lay-out
- Galvanic isolation between primary and secondary circuit
- Isolation test voltage 3500V
- Low power consumption
- Extremely low profile,  $< 11\text{ mm}$
- Single power supply +5V
- Fixed offset & gain
- Insulated plastic case recognized according to UL 94-V0.

### Special Feature

- $T_A = -40 \dots +105\text{ }^\circ\text{C}$

### Advantages

- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference.
- Internal & external reference

### Applications

- AC variable speed drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

### Application Domain


- Industrial

## Current Transducer HXS 20-NP/SP2

<b>Isolation characteristics</b>			
----------------------------------	--	--	--

<b>V<sub>b</sub></b>	Rated isolation voltage rms with IEC 61010-1 standards and following conditions	150	V rms
	- Single insulation		
	- Over voltage category III		
	- Pollution degree 2		
	- Heterogeneous field		
<b>V<sub>b</sub></b>	Rated isolation voltage rms with EN 50178 standards and following conditions	300	V rms
	- Reinforced insulation		
	- Over voltage category III		
	- Pollution degree 2		
	- Heterogeneous field		
<b>V<sub>d</sub></b>	Rms voltage for AC isolation test, 50 Hz, 1 min	3.5	kV
<b>dCp</b>	Creepage distance	> 5.5	mm
<b>dCl</b>	Clearance distance	> 5.5	mm
<b>CTI</b>	Comparative tracking index (Group I)	> 600	

## Dimensions HXS 20-NP/SP2 (in mm. 1 mm = 0.0394 inch)

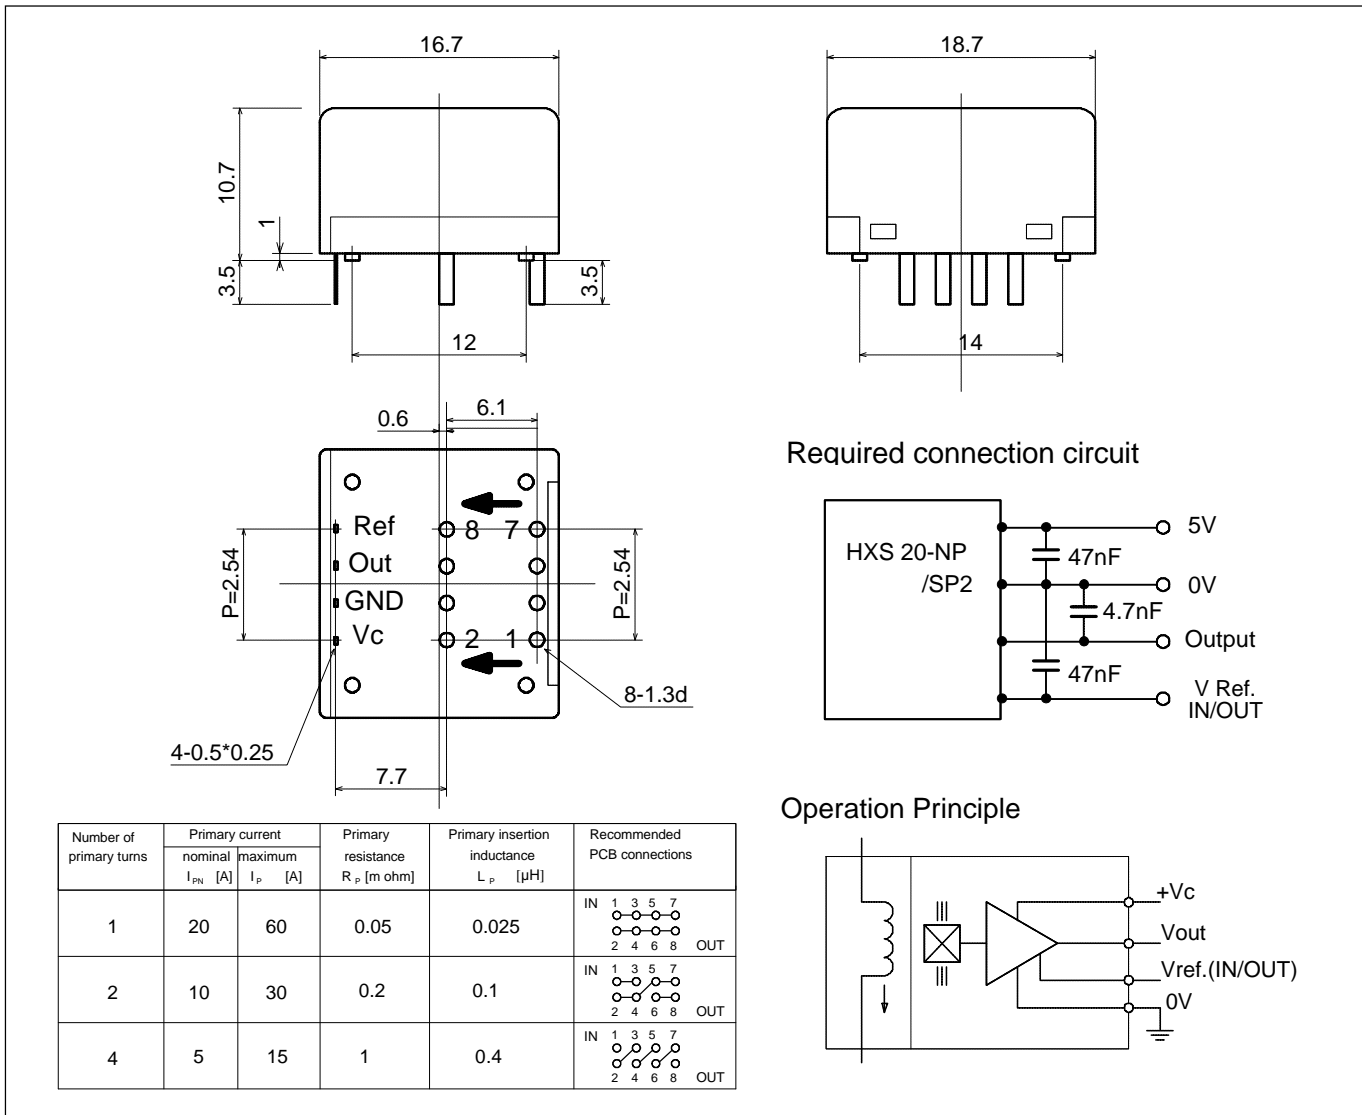

### Mechanical characteristics

- General tolerance  $\pm 0.2$  mm
- Fastening & connection of primary jumper 8 pins  $\varnothing 1.3$  mm  
Recommended PCB hole  $\varnothing 1.5$  mm
- Fastening & connection of secondary 4 pins  $0.5 \times 0.25$   
Recommended PCB hole  $\varnothing 0.7$  mm

### Remarks

- $V_{OUT}$  is positive when  $I_p$  flows from terminals 1, 3, 5, 7 (IN) to terminals 2, 4, 6, 8 (OUT).
- Temperature of the primary conductors should not exceed  $120^\circ\text{C}$ .

### Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the following manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a built-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.