

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

AN48840B

Low current consumption, high sensitivity CMOS Hall IC
 Alternating magnetic field operation
 (For low-speed rotation detection)

Overview

The AN48840B is a Hall ICs (a magnetic sensor) which has 2 times or more sensitivity and a low current consumption of about one fiftieth compared with our conventional one.

In this Hall IC, a Hall element, a offset cancel circuit, an amplifier circuit, a sample and hold circuit, a Schmidt circuit, and output stage FET are integrated on a single chip housed in a small package by IC technique.




Features

- High sensitivity due to offset cancel circuit and a new sample and hold circuit
- Small current by using intermittent action
 (Average supply current: 56 μ A typ., Sampling period: 670 μ s typ.)
- Small package (SMD)
- CMOS inverter output (logic output form)

Applications

- Functional operation key, Mouse,
 Appliances for low-speed rotation detection

Block Diagram

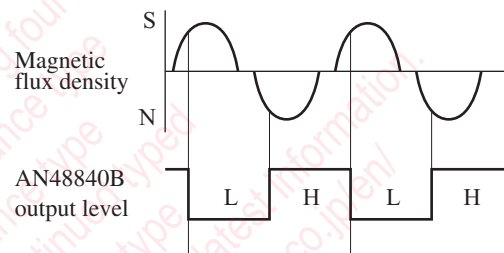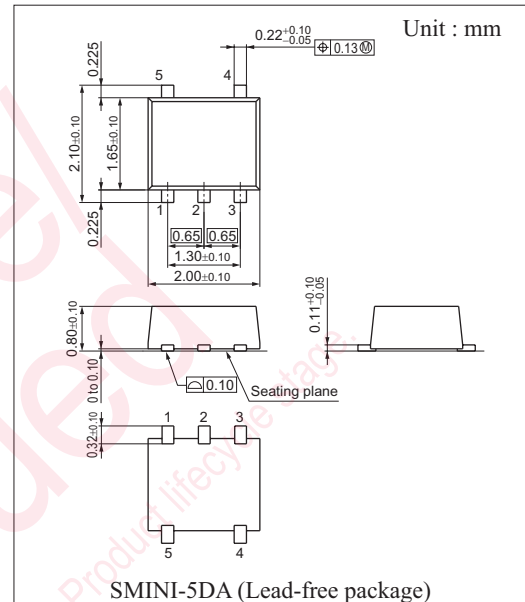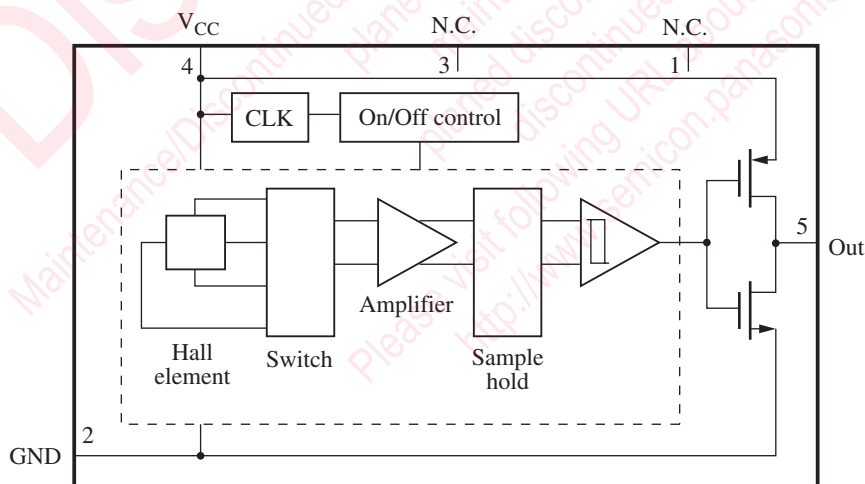

Pin Descriptions

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	N.C.	—	4	V _{CC}	Power supply
2	GND	Ground	5	Out	Output
3	N.C.	—			

■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V_{CC}	5	V
Output voltage	V_{OUT}	5	V
Supply current	I_{CC}	5	mA
Output current	I_{OUT}	15	mA
Power dissipation *1, *2	P_D	60	mW
Operating ambient temperature *1	T_{opr}	-25 to +75	°C
Storage temperature *1	T_{stg}	-55 to +125	°C

Note) *1: Except for the power dissipation, operating ambient temperature and storage temperature, all ratings are for $T_a = 25^\circ\text{C}$.

*2: $T_a = 75^\circ\text{C}$. For the independent IC without a heat sink. Please use within the range of power dissipation, referring to $P_D - T_a$ curve.

■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V_{CC}	2.5 to 3.5	V

■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 2^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Operating magnetic flux density 1 *1	B_{HL}	$V_{CC} = 3\text{ V}, V_{CC} = 2.5\text{ V}$	0.5	—	6	mT
Operating magnetic flux density 2 *2	B_{LH}	$V_{CC} = 3\text{ V}, V_{CC} = 2.5\text{ V}$	-6	—	-0.5	mT
Output voltage 1	V_{OL1}	$V_{CC} = 3\text{ V}, I_O = 2\text{ mA}, B = 6.0\text{ mT}$	—	0.1	0.3	V
Output voltage 1	V_{OL2}	$V_{CC} = 2.5\text{ V}, I_O = 2\text{ mA}, B = 6.0\text{ mT}$	—	0.1	0.3	V
Output voltage 2	V_{OH1}	$V_{CC} = 3\text{ V}, I_O = -2\text{ mA}, B = -6.0\text{ mT}$	2.7	2.9	—	V
Output voltage 2	V_{OH2}	$V_{CC} = 2.5\text{ V}, I_O = -2\text{ mA}, B = -6.0\text{ mT}$	2.7	2.9	—	V
Supply current 1 *3	I_{CCAVE}	$V_{CC} = 3\text{ V}$	—	56.0	85.0	μA
Supply current 2 *3	I_{CC2AVE}	$V_{CC} = 2.5\text{ V}$	—	48.0	72.0	μA
Intermittent action time	T_{sam}	$V_{CC} = 3\text{ V}$	490	670	850	μS
Intermittent action time 2	T_{sam2}	$V_{CC} = 2.5\text{ V}$	513	710	890	μS

Note) *1: Symbol B_{H-LS} , B_{H-LN} stands for the operating magnetic flux density where its output level varies from high to low.

*2: Symbol B_{L-HS} , B_{L-HN} stands for the operating magnetic flux density where its output level varies from low to high.

*3: $I_{CCAVE} = \{I_{CCON} \times t_{ON} + I_{CCOFF} \times t_{OFF}\} / \{t_{ON} + t_{OFF}\}$

• Design reference data

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Hysteresis width	BW	$V_{CC} = 3\text{ V}$	—	7	—	mT
Supply current 3	I_{CCON}	$V_{CC} = 3\text{ V}$	—	1.4	2.1	mA
Supply current 4	I_{CCOFF}	$V_{CC} = 3\text{ V}$	—	2.5	—	μA
Supply current 5	I_{CC2ON}	$V_{CC} = 2.5\text{ V}$	—	1.12	1.68	mA
Supply current 6	I_{CC2OFF}	$V_{CC} = 2.5\text{ V}$	—	2.2	—	μA
Operating time	t_{ON}	$T_a = -25^\circ\text{C}$ to 75°C , $V_{CC} = 3\text{ V}$	10	26	42	μS
Stop time	t_{OFF}	$T_a = -25^\circ\text{C}$ to 75°C , $V_{CC} = 3\text{ V}$	258	644	1 030	μS
Operating time 2	t_{2ON}	$T_a = -25^\circ\text{C}$ to 75°C , $V_{CC} = 2.5\text{ V}$	11	27	43	μS
Stop time 2	t_{2OFF}	$T_a = -25^\circ\text{C}$ to 75°C , $V_{CC} = 2.5\text{ V}$	270	674	1 078	μS


Note) It will operate normally in approximately 0.67 ms after power on.

■ Technical Data


- Position of a Hall element (unit in mm)

Distance from a package surface to sensor part: 0.31 mm (reference value)


A Hall element is placed on the shaded part in the figure.

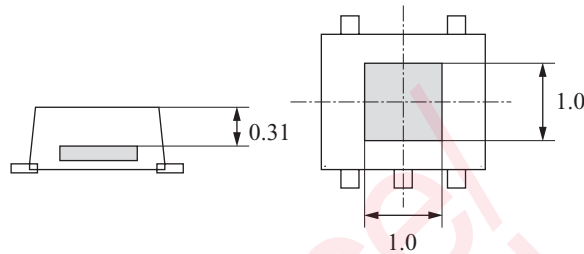

- Magneto-electro conversion characteristics




Direction of applied magnetic field

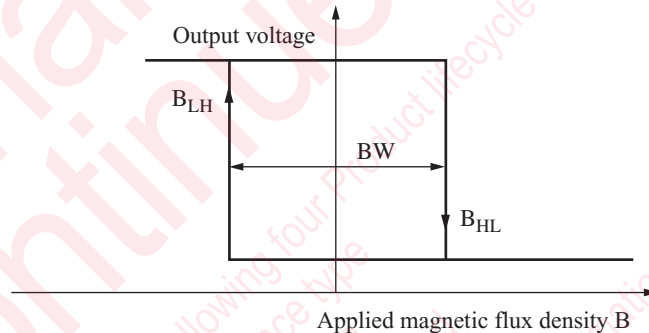

Operating magnetic flux density


- Power dissipation of package SMINI-5DA

$P_D - T_a$

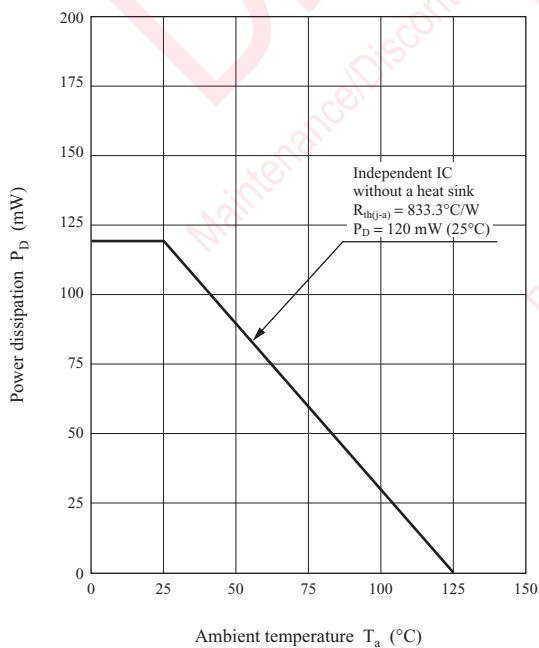

- AN48840B Main characteristics


Operating magnetic flux density — Supply voltage

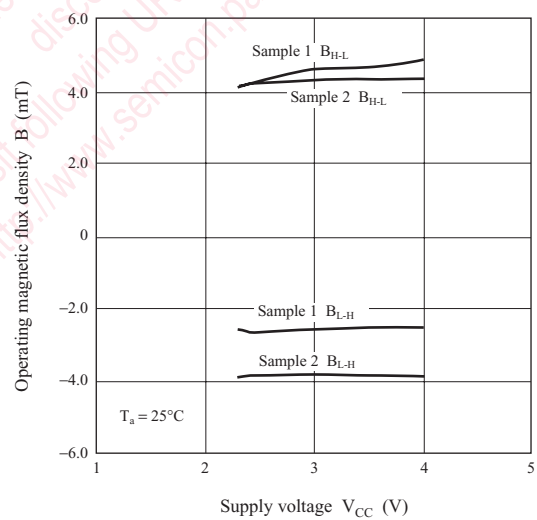


■ Technical Data (continued)

- AN48840B Main characteristics (continued)


Operating magnetic flux density — Ambient temperature

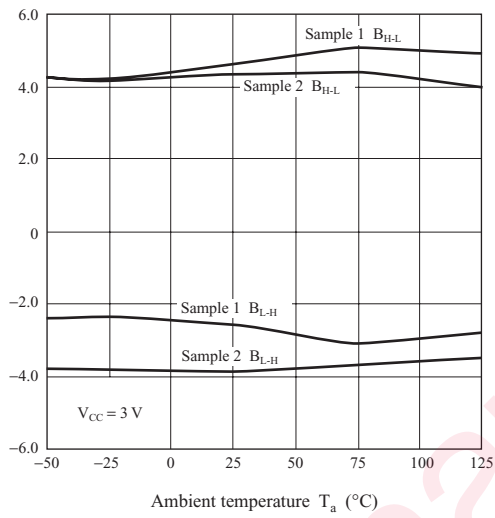


Hysteresis width — Supply voltage

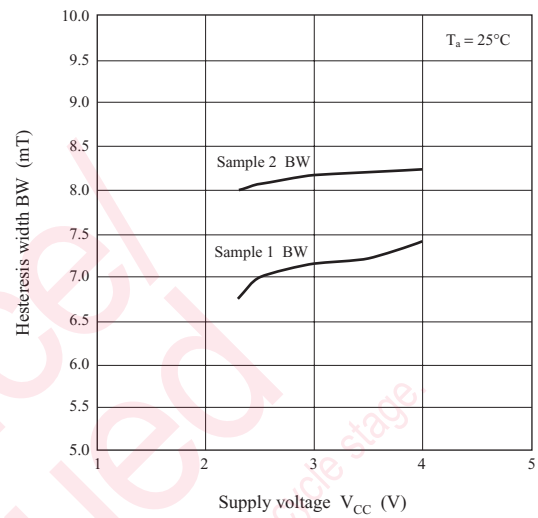


Supply current — Supply voltage

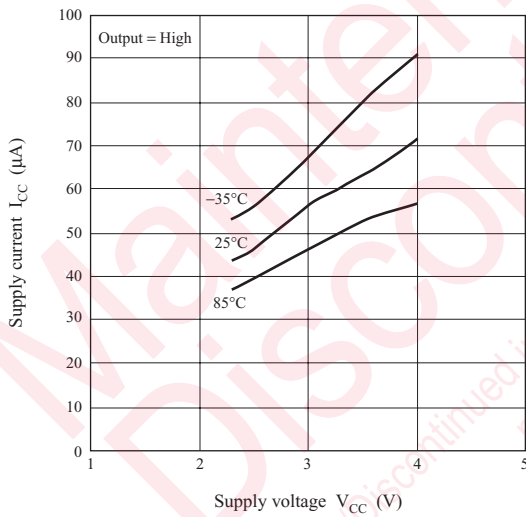


Low-level output voltage — Supply voltage

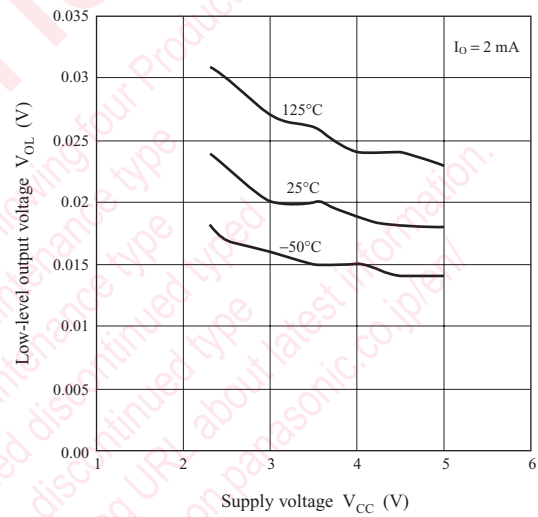

Δ high-level output voltage — Supply voltage

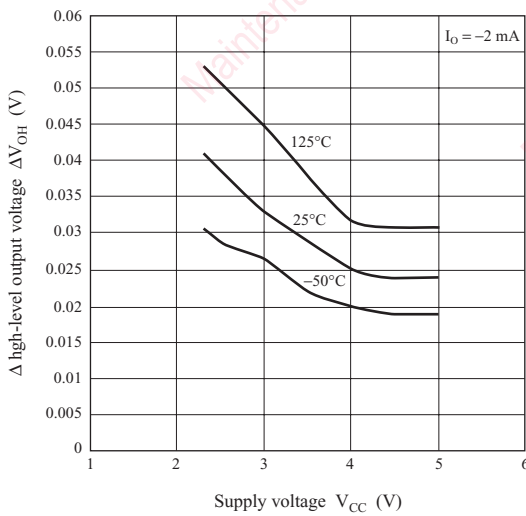

Sampling period — Supply voltage

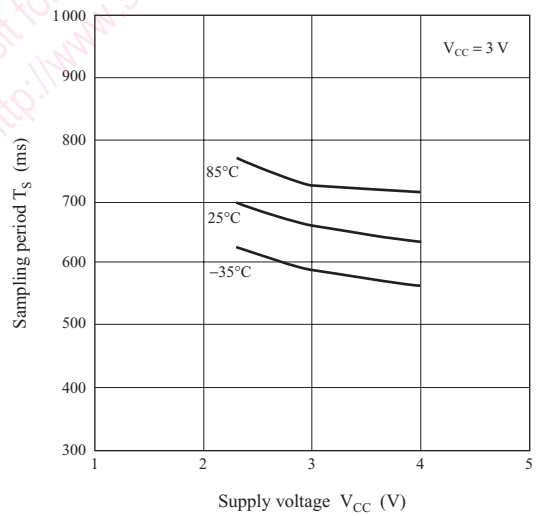

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.