

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

INTRODUCTION:

Adam Tech PH Series .100" Pin Headers are a full range headers in a variety of configurations including Single, Dual and Three rows, Straight or Right Angle in Thru-Hole or SMT mounting. Their close tolerance .025" sq. posts are smoothly finished and taper tipped to eliminate insertion damage to the PCB or mating connector. Adam Tech Pin Headers can be easily cut into exact sizes as required. Options include stacked insulator versions and choice of tin, gold or selective gold plating. This series is compatible with all industry standard .100" pitch pin headers.

FEATURES:

Single, Dual or Three Row
Tin, gold or selective gold plating options
Thru-hole or SMT mounting
Stacked and Custom length versions available
Versatile Breakaway design
Hi Temp Insulator available

MATING RECEPTACLES:

Mates with all industry standard receptacles accepting a .025" square post on .100" [2.54mm] centerlines

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL94V-0
Optional Hi-Temp insulator: Nylon 6T, rated UL94V-0
Insulator Color: Black
Contacts: Brass

Plating:

U = Gold over nickel underplate
SG = Gold over nickel underplate on contact area, tin over copper underplate on tails.
T = Tin over copper underplate overall

Electrical:

Operating voltage: 250V AC max.
Current rating: 3 Amps max
Contact resistance: 20 mΩ max. initial
Insulation resistance: 5000 MΩ min.
Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 2 oz lbs max.
Withdrawal force: .75 oz lbs min
Mating durability: 1000 cycles min.

Temperature Rating:


Operating temperature: -40°C to +105°C
Soldering process temperature:
Standard insulator: 235°C
Hi-Temp insulator: 260°C

PACKAGING:


Anti-ESD plastic bags

SAFETY AGENCY APPROVALS:

UL Recognized & CSA Certified, File no. E224053

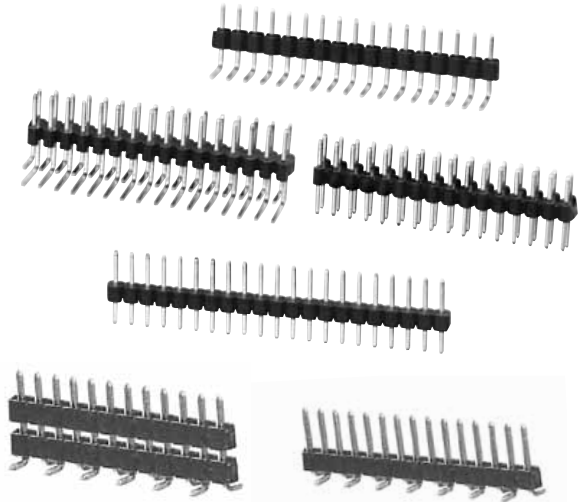

ORDERING INFORMATION

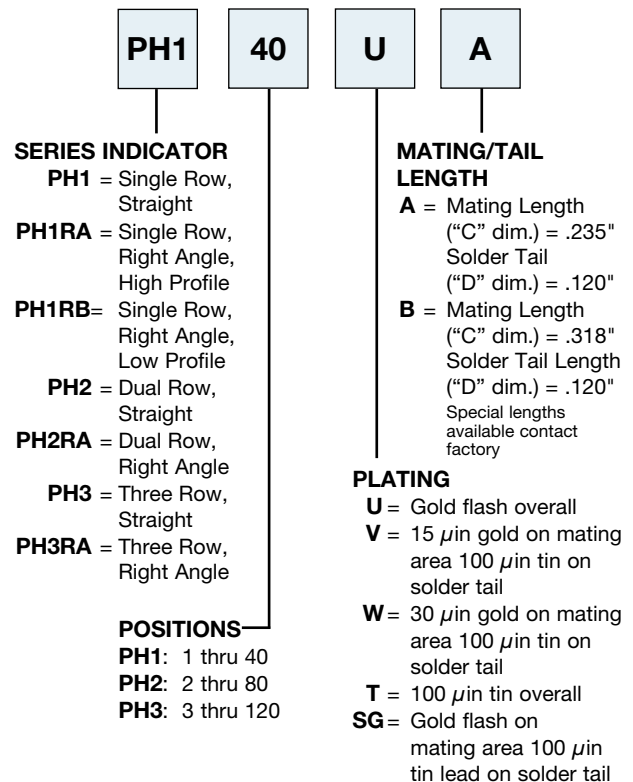


OPTIONS:

Add designator(s) to end of part number

- SMT** = Surface mount leads Dual row with Hi-Temp insulator
- SMT-A** = Surface mount leads Type A with Hi-Temp insulator
- SMT-B** = Surface mount leads Type B with Hi-Temp insulator
- HT** = Hi-Temp insulator for Hi-Temp soldering processes up to 260°C (Add this option for thru-hole products only. All SMT products are manufactured with Hi-Temp insulators)
- L** = Low profile 1.50 mm insulator thickness

A = .100 [2.54] X No. of Positions.
 B = .100 [2.54] X No. of Spaces.

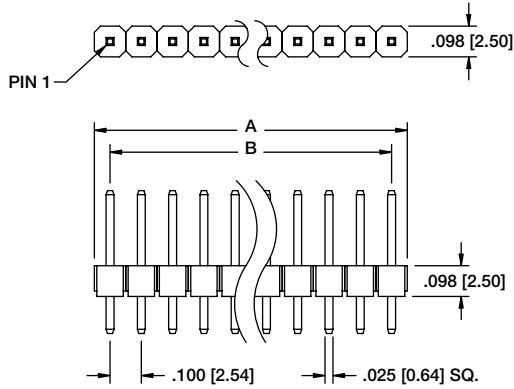


PH1
SINGLE ROW




PH1-16-UA

Recommended PCB Layout

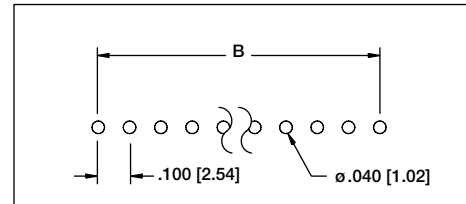

A = .100 [2.54] X No. of Positions per row.
 B = .100 [2.54] X No. of Spaces.

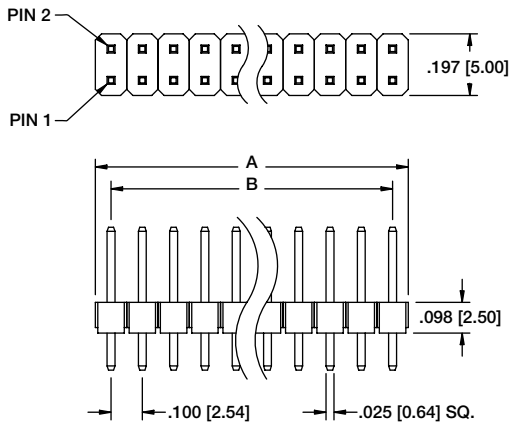


PH2
DUAL ROW




PH2-32-UA


Recommended PCB Layout

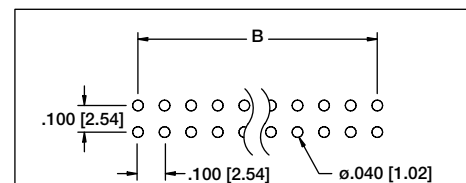

A = .100 [2.54] X No. of Positions per row.
 B = .100 [2.54] X No. of Spaces.

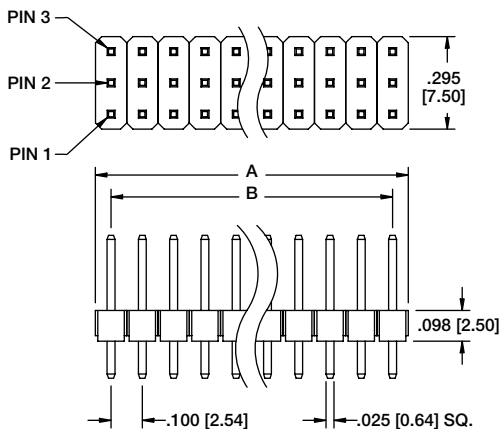



PH3
TRIPLE ROW

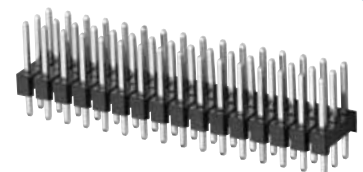

PH3-48-UA

Recommended PCB Layout

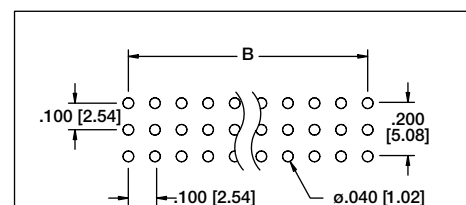

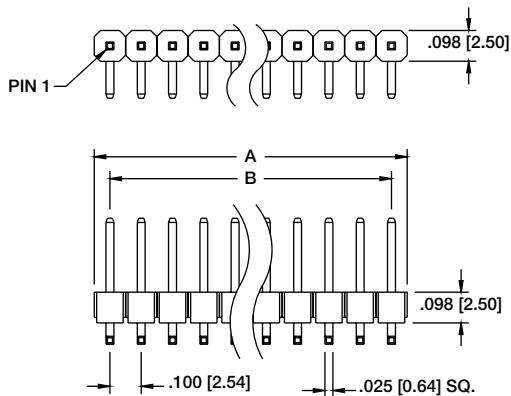


A = .100 [2.54] X No. of Positions.
B = .100 [2.54] X No. of Spaces.

PH1RB
SINGLE ROW




PH1RB-16-UA

Recommended PCB Layout



PH1RA

A = .100 [2.54] X No. of Positions per row.
B = .100 [2.54] X No. of Spaces.

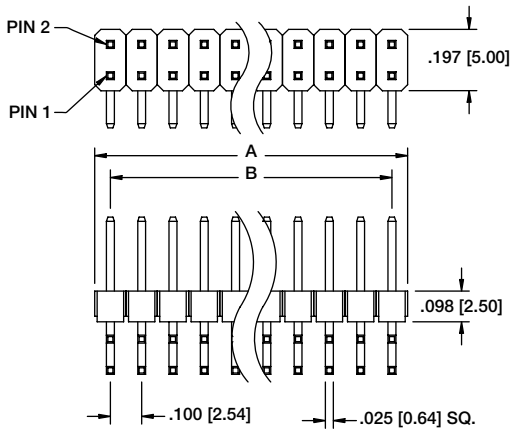


PH2RA
DUAL ROW




PH2RA-32-UA

Recommended PCB Layout

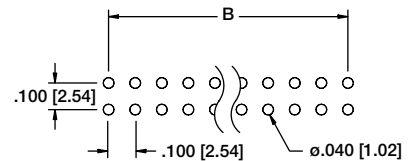

A = .100 [2.54] X No. of Positions per row.
B = .100 [2.54] X No. of Spaces.

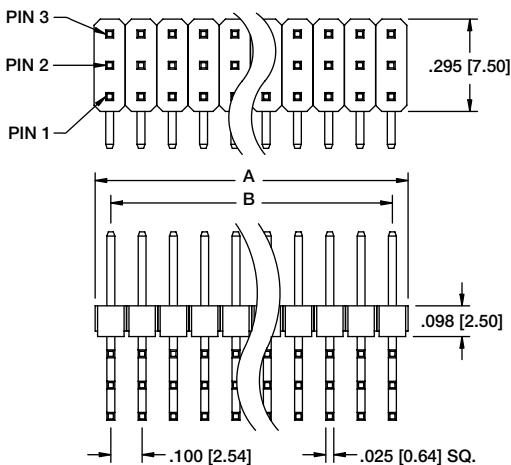


PH3RA
TRIPLE ROW



PH3RA-48-UA

Recommended PCB Layout

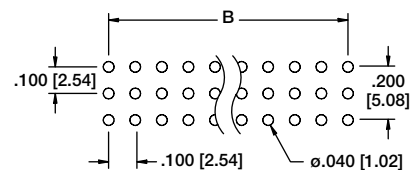

<p>PIN 1 TYPE B</p> <p>PIN 1 TYPE A</p> <p>A = .100 [2.54] X No. of Positions. B = .100 [2.54] X No. of Spaces.</p> <p>.098 [2.50]</p> <p>.100 [2.54]</p> <p>.025 [0.64] SQ</p> <p>.130 [3.30]</p> <p>.197 [5.00]</p> <p>C</p>	<p>PH1 SMT-SINGLE ROW STRAIGHT</p> <p>PH1-15-UA-SMT-B</p> <p>Recommended PCB Layout</p> <p>SMT-A</p> <p>SMT-B</p>
<p>PIN 2</p> <p>PIN 1</p> <p>A = .100 [2.54] X No. of Positions per row. B = .100 [2.54] X No. of Spaces.</p> <p>.197 [5.00]</p> <p>.100 [2.54]</p> <p>.025 [0.64] SQ</p> <p>.130 [3.30]</p> <p>.295 [7.50]</p> <p>C</p>	<p>PH2 SMT-DUAL ROW STRAIGHT</p> <p>PH2-26-UA-SMT</p> <p>Recommended PCB Layout</p> <p>SMT-A</p>
<p>PIN 1</p> <p>A = .100 [2.54] X No. of Positions. B = .100 [2.54] X No. of Spaces.</p> <p>.180 [4.57]</p> <p>.100 [2.54]</p> <p>.098 [2.50]</p> <p>.154 [3.90]</p> <p>C</p>	<p>PH1RB SMT-SINGLE ROW RIGHT ANGLE</p> <p>PH1RB-10-UA-SMT</p> <p>Recommended PCB Layout</p> <p>SMT-A</p>
<p>PIN 2</p> <p>PIN 1</p> <p>A = .100 [2.54] X No. of Positions per row. B = .100 [2.54] X No. of Spaces.</p> <p>.180 [4.57]</p> <p>.100 [2.54]</p> <p>.197 [5.00]</p> <p>.098 [2.50]</p> <p>.100 [2.54]</p> <p>C</p>	<p>PH2RA SMT-DUAL ROW RIGHT ANGLE</p> <p>PH2RA-20-UA-SMT</p> <p>Recommended PCB Layout</p> <p>SMT-A</p>