

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

## Anti-Surge Thick Film Chip Resistors

Type: **ERJ PA2, P03, PA3, P06, P08, P14**



### Features

- ESD surge characteristics superior to standard metal film resistors
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Suitable for both reflow and flow soldering
- High power ... 0.20 W : 0402 inch / 1005 mm size (ERJPA2), 0603 inch / 1608 mm size (ERJP03)  
0.25 W : 0603 inch / 1608 mm size (ERJPA3)  
0.50 W : 0805 inch / 2012 mm size (ERJP06), 1210 inch / 3225 mm size (ERJP14)  
0.66 W : 1206 inch / 3216 mm size (ERJP08)
- Reference Standards... IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified
- RoHS compliant

■ **As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,**  
Please see Data Files


### Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	R	J	P	0	6	D	1	0	0	2	V


  

Product Code	Size, Power Rating		Resistance Tolerance		Resistance Value	Packaging Methods			
Thick Film Chip Resistors	Code	Inch	Power R.	Code		Tolerance	Code	Packaging	Part No.
	PA2	0402	0.20 W	D	± 0.5 %	The first two or three digits are significant figures of resistance and the third or 4th one denotes number of zeros following. Three digit type (±5 %), four digit type (±1 %, ±0.5 %) Example: 222→2.2k Ω, 1002→10k Ω	X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	ERJPA2
	P03	0603	0.20 W	F	± 1 %		V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJP03 ERJPA3 ERJP06 ERJP08
	PA3	0603	0.25 W	J	± 5 %		U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJP14
	P06	0805	0.50 W						
	P08	1206	0.66 W						
	P14	1210	0.50 W						

### Construction

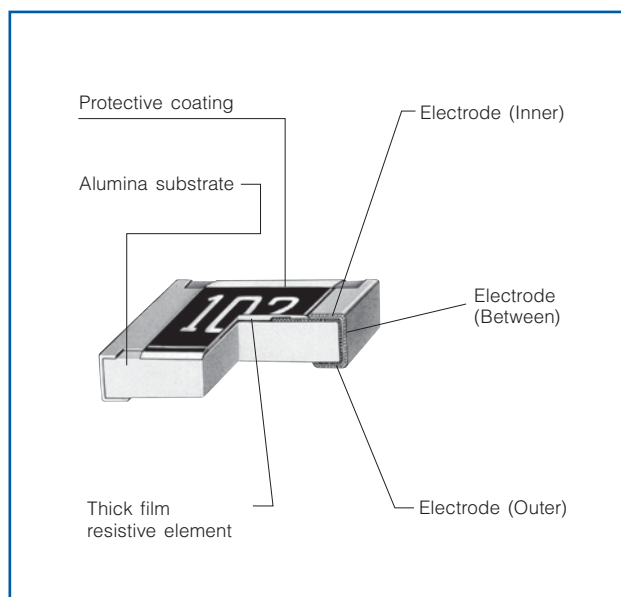

### Dimensions in mm (not to scale)

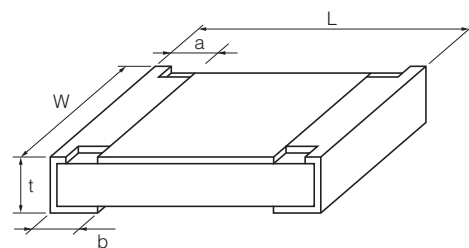

Part No. (inch size)	Dimensions (mm)					Mass (Weight) [g/1000 pcs.]
	L	W	a	b	t	
ERJPA2 (0402)	1.00 <sup>+0.05</sup>	0.50 <sup>+0.05</sup>	0.20 <sup>+0.15</sup>	0.25 <sup>+0.05</sup>	0.35 <sup>+0.05</sup>	0.8
ERJP03 (0603)	1.60 <sup>+0.15</sup>	0.80 <sup>+0.15</sup> <sub>-0.05</sub>	0.15 <sup>+0.15</sup> <sub>-0.10</sub>	0.30 <sup>+0.15</sup>	0.45 <sup>+0.10</sup>	2
ERJPA3 (0603)	1.60 <sup>+0.15</sup>	0.80 <sup>+0.15</sup> <sub>-0.05</sub>	0.15 <sup>+0.15</sup> <sub>-0.10</sub>	0.25 <sup>+0.10</sup>	0.45 <sup>+0.10</sup>	2
ERJP06 (0805)	2.00 <sup>+0.20</sup>	1.25 <sup>+0.10</sup>	0.25 <sup>+0.20</sup>	0.40 <sup>+0.20</sup>	0.60 <sup>+0.10</sup>	4
ERJP08 (1206)	3.20 <sup>+0.05</sup> <sub>-0.20</sub>	1.60 <sup>+0.05</sup> <sub>-0.15</sub>	0.40 <sup>+0.20</sup>	0.50 <sup>+0.20</sup>	0.60 <sup>+0.10</sup>	10
ERJP14 (1210)	3.20 <sup>+0.20</sup>	2.50 <sup>+0.20</sup>	0.35 <sup>+0.20</sup>	0.50 <sup>+0.20</sup>	0.60 <sup>+0.10</sup>	16

## Ratings


Part No. (inch size)	Power Rating <sup>(3)</sup> at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJPA2 (0402)	0.20	50	100	$\pm 0.5, \pm 1$	10 to 1M (E24, E96)	$\pm 100$	-55 to +155
				$\pm 5$	10 to 1M (E24)	$\pm 200$	
ERJP03 (0603)	0.20	150	200	$\pm 0.5$	10 to 1M (E24, E96)	$\pm 150$	-55 to +155
				$\pm 1$	10 to 1M (E24, E96)	$\pm 200$	
				$\pm 5$	1 to 1M (E24)	R < 10 Ω : -150 to +400 10 Ω ≤ R : ±200	
ERJPA3 (0603)	0.25	150	200	$\pm 0.5, \pm 1$	10 to 1M (E24, E96)	$\pm 100$	-55 to +155
				$\pm 5$	1 to 1.5M (E24)	$\pm 200$	
ERJP06 (0805)	0.50	400	600	$\pm 0.5, \pm 1$	10 to 1M (E24, E96)	R < 33 Ω : ±300 33 Ω ≤ R : ±100	-55 to +155
				$\pm 5$	1 to 3.3M (E24)	R < 10 Ω : -100 to +600 10 Ω ≤ R < 33 Ω : ±300 33 Ω ≤ R : ±200	
ERJP08 (1206)	0.66	500	1000	$\pm 0.5, \pm 1$	10 to 1M (E24, E96)	$\pm 100$	-55 to +155
				$\pm 5$	1 to 10M (E24)	R < 10 Ω : -100 to +600 10 Ω ≤ R : ±200	
ERJP14 (1210)	0.50	200	400	$\pm 0.5, \pm 1$	10 to 1M (E24, E96)	$\pm 100$	-55 to +155
				$\pm 5$	1 to 1M (E24)	R < 10 Ω : -100 to +600 10 Ω ≤ R : ±200	

- (1) Rated Continuous Working Voltage (RCWW) shall be determined from  $\text{RCWW} = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.  
 (2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $\text{SOTV} = 2.5 \times \text{RCWW}$  or max. Overload Voltage listed above whichever less.  
 (3) Use it on the condition that the case temperature is below 155 °C.


### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

\* When the temperature of ERJP14 is 155 °C or less, the derating start temperature can be changed to 125 °C. (See the dotted line)

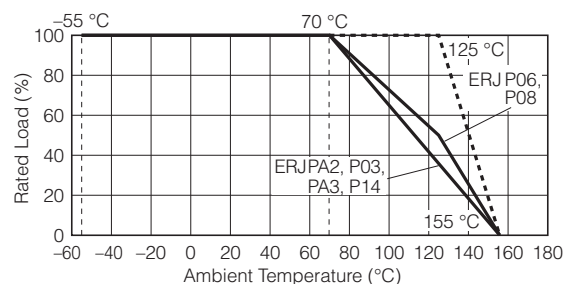


## ESD Characteristic

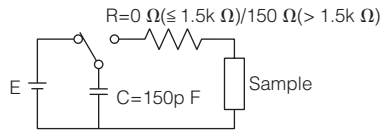

0402 inch size : E=±1k V  
 0603, 0805, 1206, 1210 inch size : E=±3k V

— Anti-Surge Thick Film Chip Resistors(ERJP Type)  
 - - - Thick Film Chip Resistors(ERJ Type)

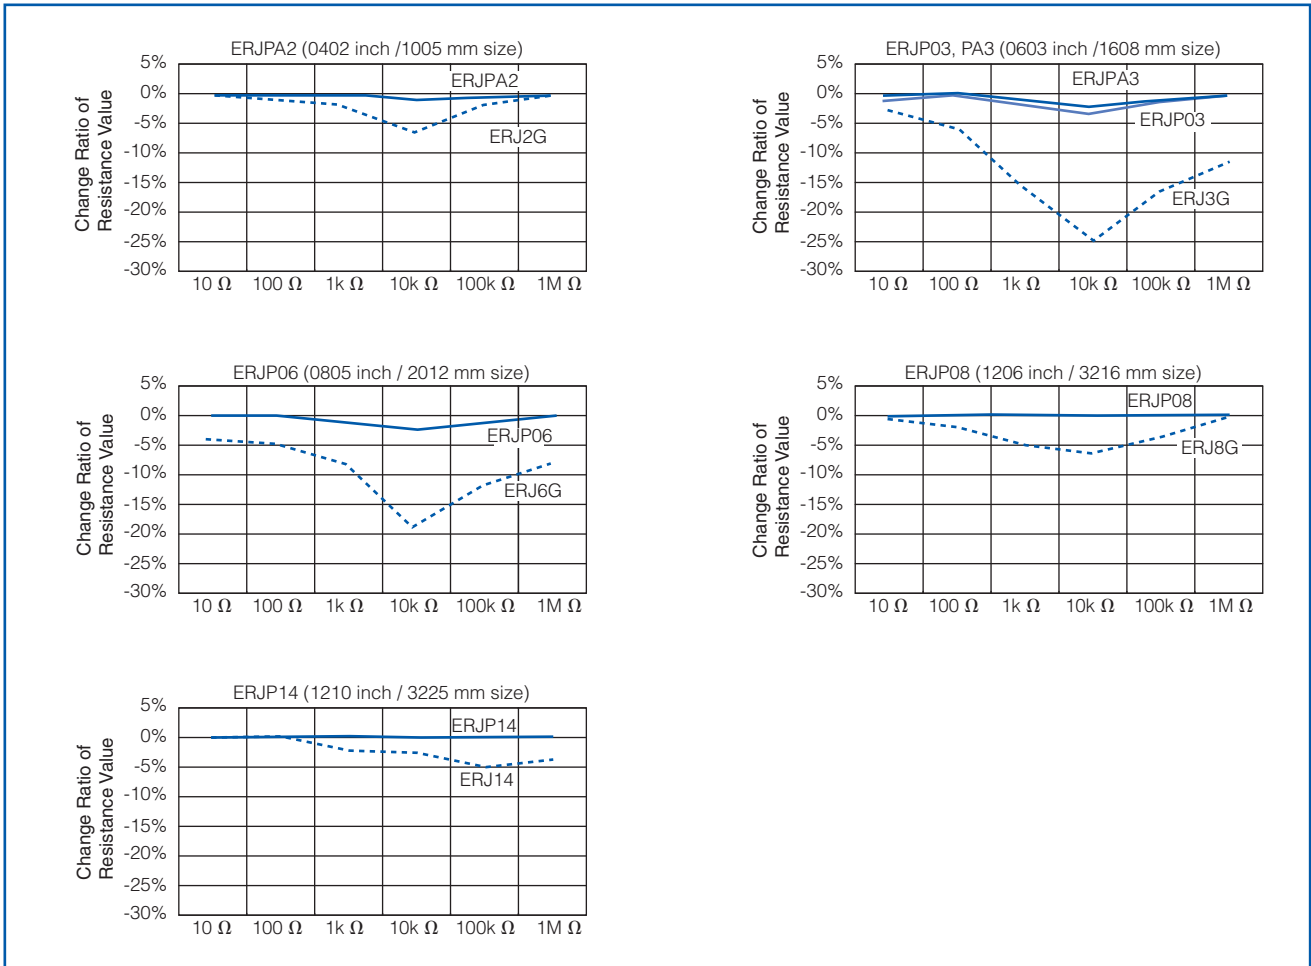

## Anti-Pulse Thick Film Chip Resistors



Type: **ERJ T06, T08, T14**  
**ERJ T14L**


### Features

- Anti-Pulse characteristics  
High pulse characteristics achieved by the optimized trimming specifications (ERJT06, T08, T14)
- Further high pulse characteristics achieved by trimming-less specifications (ERJT14L)
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Suitable for both reflow and flow soldering
- High power ... 0.25W : 0805 inch / 2012 mm size (ERJT06)  
0.33W : 1206 inch / 3216 mm size (ERJT08)  
0.50W : 1210 inch / 3225 mm size (ERJT14, ERJT14L)
- Reference Standards...IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified
- RoHS compliant


■ **As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,**  
Please see Data Files

### Explanation of Part Numbers

- ERJT06, T08, T14 Type

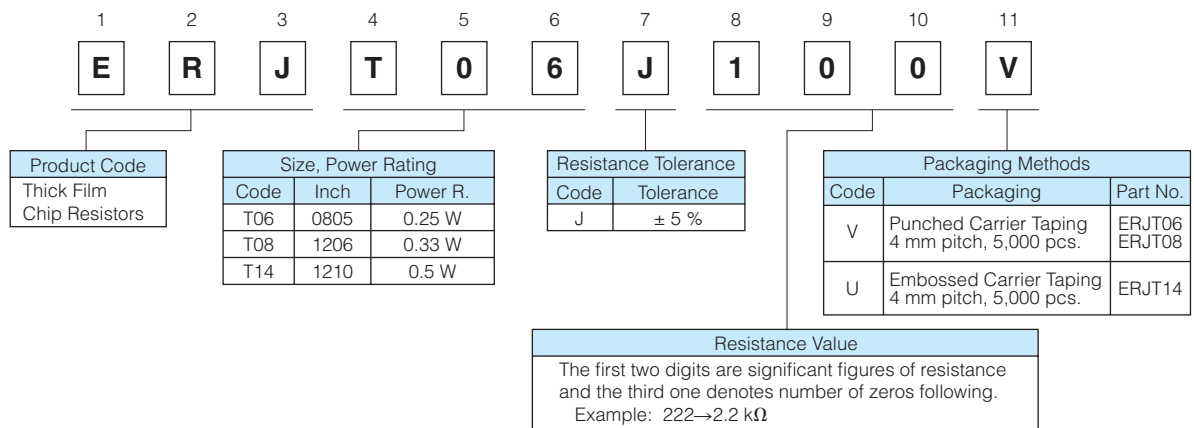


- ERJT14L Type

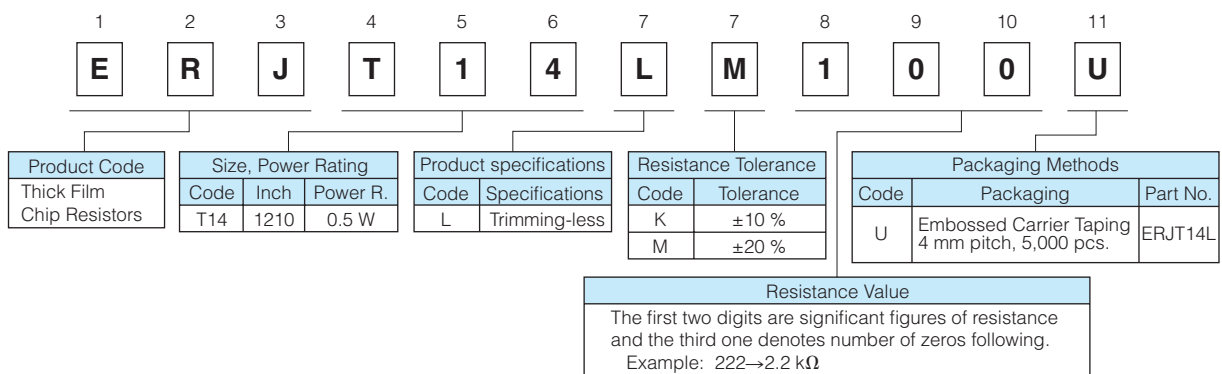


\* Please contact us for 2012 (mm) and 3216 (mm) size trimming-less types.

## Construction

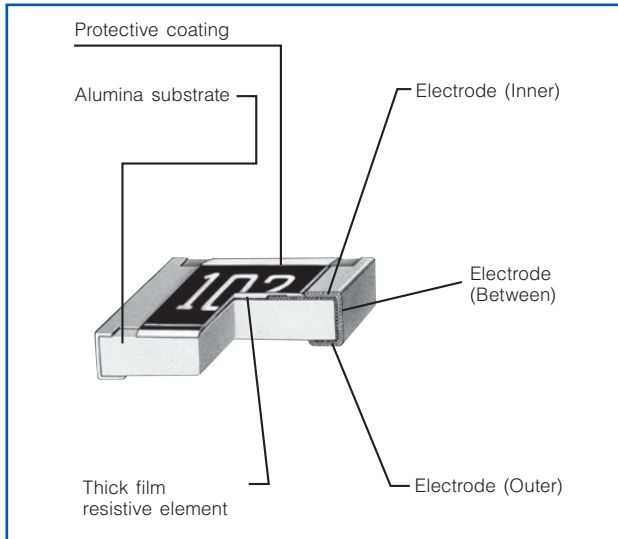

## Dimensions in mm (not to scale)

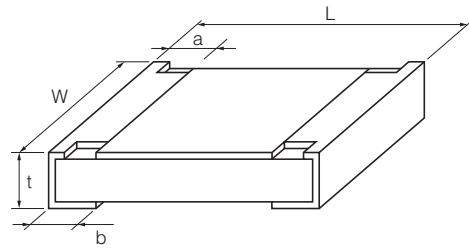

Part No. (inch size)	Dimensions (mm)					Mass (Weight) [g/1000 pcs.]
	L	W	a	b	t	
ERJT06 (0805)	2.00 <sup>±0.20</sup>	1.25 <sup>±0.10</sup>	0.25 <sup>±0.20</sup>	0.40 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	4
ERJT08 (1206)	3.20 <sup>+0.05/-0.20</sup>	1.60 <sup>+0.05/-0.15</sup>	0.40 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	10
ERJT14 ERJT14L (1210)	3.20 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>	0.35 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	16

## Ratings


Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. (×10 <sup>-6</sup> /°C)	Category Temperature Range (°C)
ERJT06 (0805)	0.25	150	200	±5	1 to 1 M (E24)	Less than 10 Ω : -100 to +600 Less than 33 Ω : ±300 More than 33 Ω : ±200	-55 to +155
ERJT08 (1206)	0.33	200	400	±5	1 to 1 M (E24)	Less than 10 Ω : -100 to +600 More than 10 Ω : ±200	-55 to +155
ERJT14 (1210)	0.50	200	400	±5	1 to 1 M (E24)	Less than 10 Ω : -100 to +600 More than 10 Ω : ±200	-55 to +155
ERJT14L (1210)	0.50	200	400	±10 ±20	1 to 1 M (E12)	Less than 10 Ω : -100 to +600 More than 10 Ω : ±200	-55 to +155

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times RCWV$  or max. Overload Voltage listed above whichever less.


### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

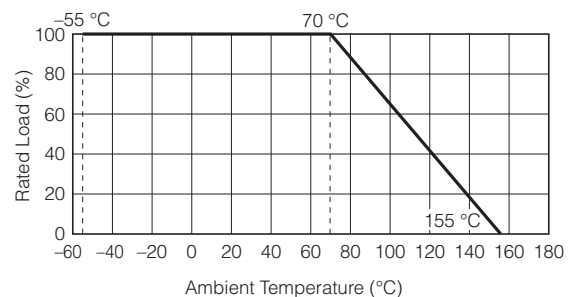

## Limiting Power Curve


- In rush pulse Characteristic

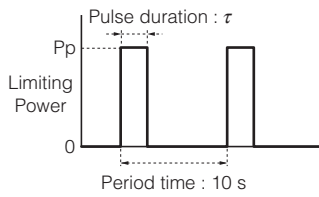


Test cycle : 1000 cycles  
Spec : Resistance value = within  $\pm 5\%$

- ▲ : Anti-Pulse Thick Film Chip Resistors (ERJT14L Type)
- : Anti-Pulse Thick Film Chip Resistors (ERJT Type)
- : Thick Film Chip Resistors (ERJ Type)


- ERJT06 (0805 inch/2012 mm size)

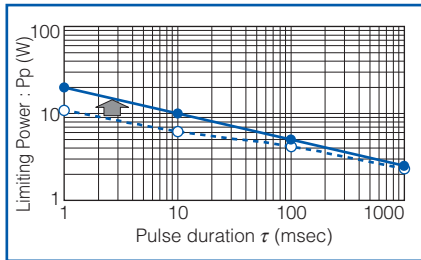

- ERJT08 (1206 inch/3216 mm size)

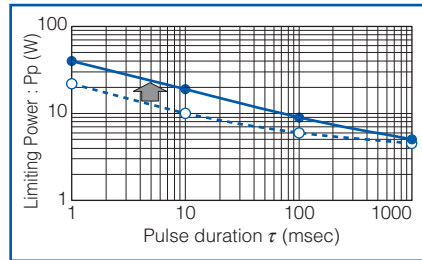

- ERJT14,ERJT14L (1210 inch/3225 mm size)

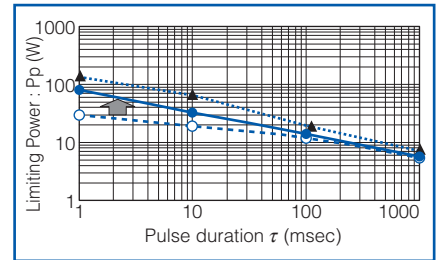

\* Please contact us for 2012 (mm) and 3216 (mm) size trimming-less types.

## Anti-Surge Thick Film Chip Resistors (Double-sided resistive elements structure) 0805

Type: **ERJ P6W**


### ■ Features

- ESD surge characteristics superior to standard metal film resistors
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Suitable for both reflow and flow soldering
- High power ··· 0.50 W : 2012(0805) size(ERJP6W)
- High pulse characteristics ··· 1.5 times higher than 0805 inch size Anti-Surge Thick Film Chip Resistors (ERJP06)
- Reference Standards ··· IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified
- RoHS compliant


### ■ Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions

Please see Data Files


### ■ Explanation of Part Numbers

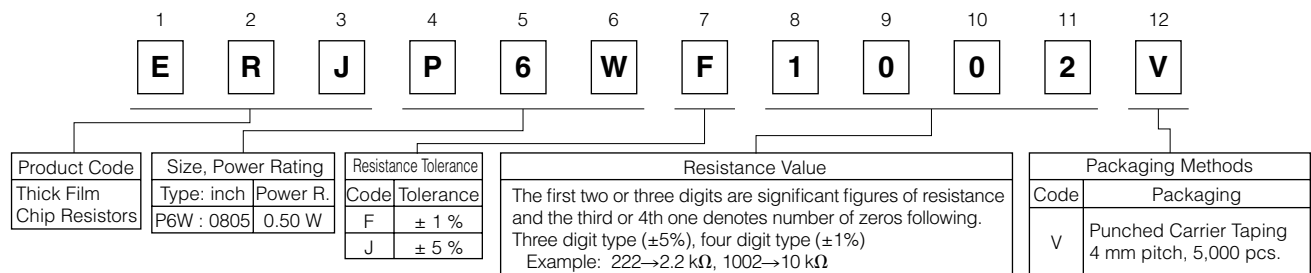

### ■ Construction

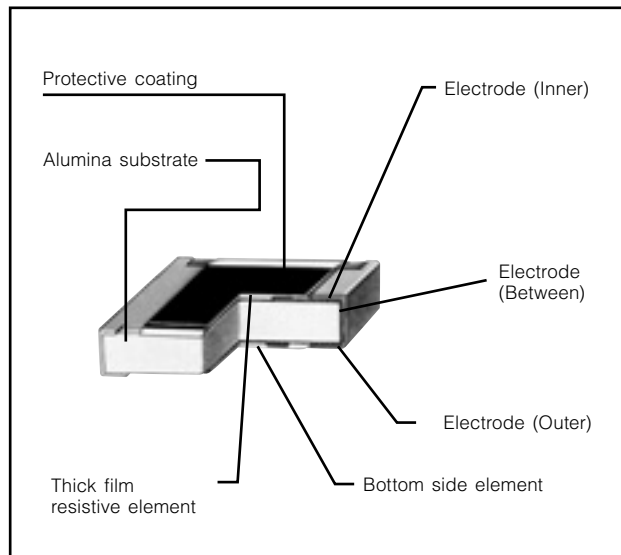

### ■ Dimensions in mm (not to scale)

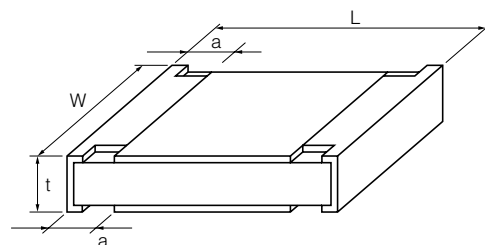

Type (inch size)	Dimensions (mm)				Mass (Weight) [g/1000 pcs.]
	L	W	a	t	
ERJP6W (0805)	2.00±0.20	1.25±0.20	0.35±0.20	0.65±0.10	6



### ■ Ratings

Type (inch size)	Power Rating <sup>(3)</sup> at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. (×10 <sup>-6</sup> /°C)	Category Temperature Range (°C)
ERJP6W (0805)	0.50	150	200	±1	10 to 1 M (E24, E96)	±200	-55 to +155
				±5	1 to 1 M (E24)	R < 10 Ω : -100 to +600 10 Ω ≤ R : ±200	


(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times \text{Power Rating}$  or max. Overload Voltage listed above whichever less.


(3) Use it on the condition that the case temperature is below 155 °C.

### Power Derating Curve


For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

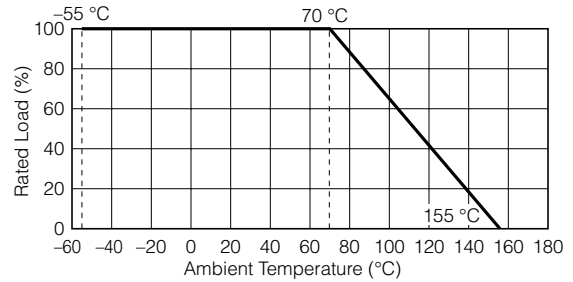

### ■ ESD Characteristic

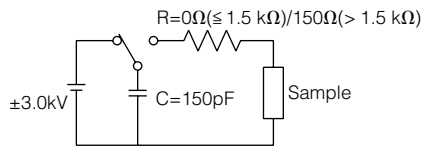


— Anti-Surge Thick Film Chip Resistors (ERJP6W Type)  
 - - - Thick Film Chip Resistors (ERJ6G Type)

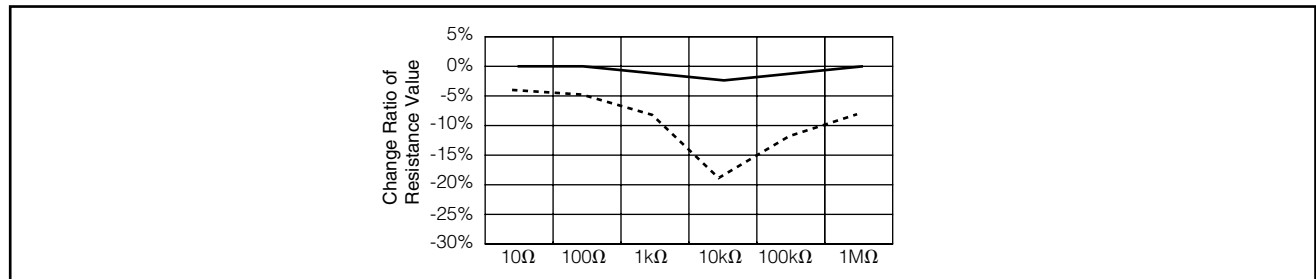


### ■ Limiting Power Curve

● In rush pulse Characteristic



Test cycle : 1 cycles  
 Spec : Resistance value = within ±1%

— Anti-Surge Thick Film Chip Resistors (ERJP6W Type)  
 - - - Anti-Surge Thick Film Chip Resistors (ERJP06 Type)

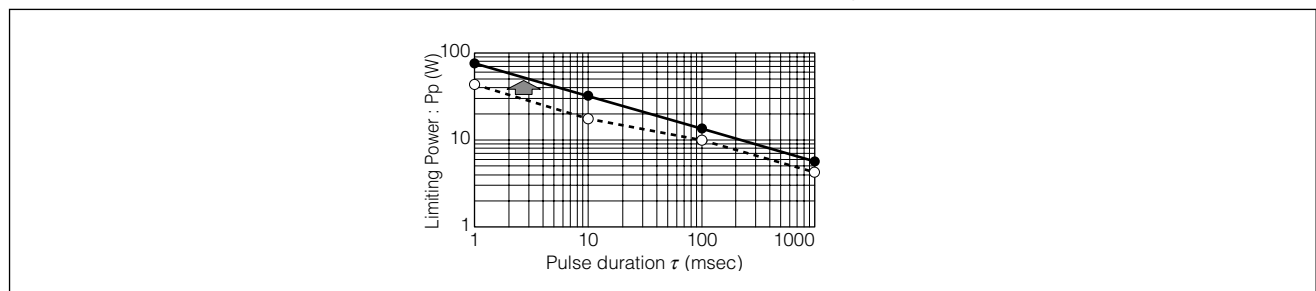

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[ERJ-P14J102U](#) [ERJ-P06F1001V](#) [ERJ-P06F3900V](#) [ERJ-P08J244V](#) [ERJ-P08J750V](#) [ERJ-P06J100V](#) [ERJ-P06J101V](#)  
[ERJ-P06J470V](#) [ERJ-P08F1001V](#) [ERJ-P08F2200V](#) [ERJ-P08F30R1V](#) [ERJ-P08F3010V](#) [ERJ-P08J150V](#) [ERJ-](#)  
[P08J560V](#) [ERJ-P08J680V](#) [ERJ-P06J220V](#) [ERJ-P08J220V](#) [ERJ-P14J560U](#) [ERJ-P14F30R0U](#) [ERJ-P14J103U](#) [ERJ-](#)  
[P14J221U](#) [ERJ-P06J151V](#) [ERJ-P06J270V](#) [ERJ-P14J3R9U](#) [ERJ-P14J4R7U](#) [ERJ-P06J560V](#) [ERJ-P08J120V](#) [ERJ-](#)  
[P08J180V](#) [ERJ-P14F4700U](#) [ERJ-P14J112U](#) [ERJ-P14J821U](#) [ERJ-P06D2000V](#) [ERJ-P06D20R0V](#) [ERJ-P06J301V](#)  
[ERJ-P08D4991V](#) [ERJ-P08J100V](#) [ERJ-P08J201V](#) [ERJ-P08J241V](#) [ERJ-P08J911V](#) [ERJ-P06D2103V](#) [ERJ-](#)  
[P06D4991V](#) [ERJ-P06D6652V](#) [ERJ-P06F4530V](#) [ERJ-P06D2153V](#) [ERJ-P06F2211V](#) [ERJ-P06F8062V](#) [ERJ-](#)  
[P06F5110V](#) [ERJ-P06F4753V](#) [ERJ-P06F3831V](#) [ERJ-P06F3161V](#) [ERJ-P06F31R6V](#) [ERJ-P06F3011V](#) [ERJ-](#)  
[P06F2491V](#) [ERJ-P06F2003V](#) [ERJ-P06D2003V](#) [ERJ-P06F9531V](#) [ERJ-P06F2611V](#) [ERJ-P06F3301V](#) [ERJ-](#)  
[P06F5100V](#) [ERJ-P03F1000V](#) [ERJ-P03F1001V](#) [ERJ-P03F1003V](#) [ERJ-P03F1004V](#) [ERJ-P03F1020V](#) [ERJ-](#)  
[P03F1021V](#) [ERJ-P03F1022V](#) [ERJ-P03F1023V](#) [ERJ-P03F1050V](#) [ERJ-P03F1051V](#) [ERJ-P03F1052V](#) [ERJ-](#)  
[P03F1053V](#) [ERJ-P03F1070V](#) [ERJ-P03F1071V](#) [ERJ-P03F1072V](#) [ERJ-P03F1073V](#) [ERJ-P03F10R2V](#) [ERJ-](#)  
[P03F10R5V](#) [ERJ-P03F10R7V](#) [ERJ-P03F1100V](#) [ERJ-P03F1101V](#) [ERJ-P03F1102V](#) [ERJ-P03F1103V](#) [ERJ-](#)  
[P03F1130V](#) [ERJ-P03F1131V](#) [ERJ-P03F1132V](#) [ERJ-P03F1133V](#) [ERJ-P03F1150V](#) [ERJ-P03F1151V](#) [ERJ-](#)  
[P03F1152V](#) [ERJ-P03F1153V](#) [ERJ-P03F1180V](#) [ERJ-P03F1181V](#) [ERJ-P03F1182V](#) [ERJ-P03F1183V](#) [ERJ-](#)  
[P03F11R0V](#) [ERJ-P03F11R3V](#) [ERJ-P03F11R5V](#) [ERJ-P03F11R8V](#) [ERJ-P03F1200V](#) [ERJ-P03F1201V](#)