

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



# JM38510/13501/13502

ULTRA-LOW OFFSET VOLTAGE  
OPERATIONAL AMPLIFIERS

Precision Monolithics Inc.

T-79-06-10

## FEATURES

- Low  $V_{OS}$  .....  $25\mu V$
- Low  $V_{OS}$  Drift .....  $0.6\mu V/^\circ C$
- Low Noise .....  $0.6\mu V_{p-p}$
- Wide Supply Voltage Range .....  $\pm 4.5V$  to  $\pm 20V$

have identical operational performance characteristics across the military temperature range or reliability factors equivalent to the MIL-M-38510 device.

## ORDERING INFORMATION

JAN SLASH SHEET	PMI DEVICE
JM38510/13501BGC	OP07AJ1/38510
JM38510/13501BGA	OP07AJ5/38510
JM38510/13501SGA	OP07SAJ5/38510
JM38510/13501BPB	OP07AZ2/38510
JM38510/13501BPA	OP07AZ5/38510
JM38510/13501SPA	OP07SAZ5/38510
JM38510/13502BGC	OP07J1/38510
JM38510/13502BGA	OP07J5/38510
JM38510/13502SGA	OP07SJ5/38510
JM38510/13502BPB	OP07Z2/38510
JM38510/13502BPA	OP07Z5/38510
JM38510/13502SPA	OP07SZ5/38510

MILITARY DEVICE TYPE	GENERIC-INDUSTRY TYPE
01	OP07A
02	OP07

For an 833-processed device with improved electrical specifications, review the OP-07 data sheet.

## GENERAL DESCRIPTION


This data sheet covers the electrical requirements for a monolithic, low offset voltage, internally-compensated operational amplifier as specified in MIL-M-38510/135 for device type 01 and 02. Devices supplied to this data sheet are manufactured and tested at PMI's MIL-M-38510 certified facility and are listed in QPL-38510.

Complete device requirements will be found in MIL-M-38510 and MIL-M-38510/135 for Class B and Class S processed devices.

## GENERIC CROSS-REFERENCE INFORMATION

This cross-reference information is presented for the convenience of the user. The generic-industry types listed may not


## PIN CONNECTIONS

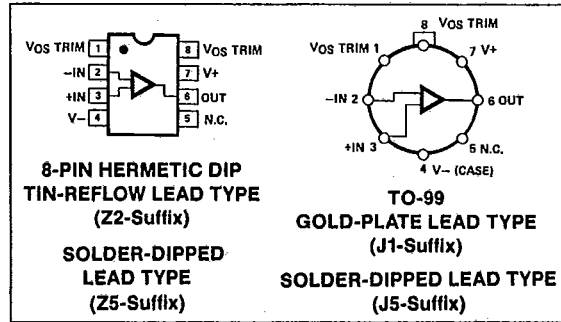

## POWER AND THERMAL CHARACTERISTICS

Case Outline	Package	Maximum Allowable Power Dissipation	Maximum $\theta_{JC}$	Maximum $\theta_{JA}$
P	Dual-In-Line	208mW @ $T_A = 125^\circ C$	50°C/W	120°C/W
G	8-Lead CAN	167mW @ $T_A = 125^\circ C$	40°C/W	150°C/W

## SIMPLIFIED SCHEMATIC

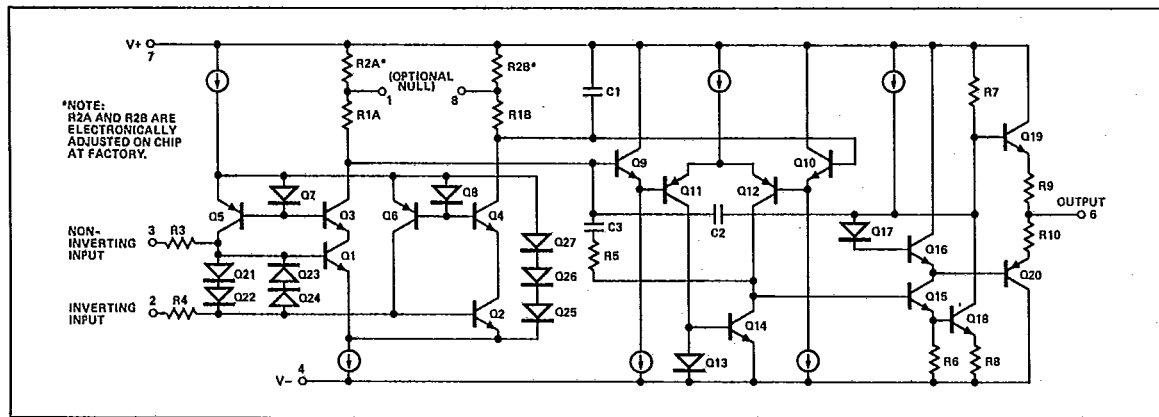



ANALOG DEVICES/ PMI DIV

26E D ■ 0816805 0009027 3 ■

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage ( $V_{CC}$ )	$\pm 22V$
Input Voltage Range ( $V_{IN}$ )	$\pm V_{CC}$
Differential Input Voltage Range	$\pm 30V$
Output Short-Circuit Duration (Note 1)	
Lead Temperature (Soldering, 60 sec)	$+300^{\circ}C$
Storage Temperature Range	$-65^{\circ}C$ to $+150^{\circ}C$
Junction Temperature ( $T_J$ )	$+150^{\circ}C$
Maximum Power Dissipation ( $P_D$ ) (Note 2)	500mW

## RECOMMENDED OPERATING CONDITIONS

Supply Voltage Range	$\pm 4.5V$ to $\pm 20V$
Ambient Temperature Range	$-55^{\circ}C$ to $+125^{\circ}C$

T-79-06-10

## NOTES:

- Output may be shorted to ground indefinitely at  $V_S = \pm 15V$ ,  $T_A = 25^{\circ}C$ . Temperature and/or supply voltages must be limited to ensure dissipation rating is not exceeded.
- Maximum power dissipation versus ambient temperature.

ELECTRICAL CHARACTERISTICS at  $\pm 4.5V \leq V_{CC} \leq \pm 20V$  and  $-55^{\circ}C \leq T_A \leq 125^{\circ}C$ ,  $R_S = 50\Omega$  unnullified, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	01 LIMITS		02 LIMITS		UNITS
			MIN	MAX	MIN	MAX	
Input Offset Voltage	$V_{IO}$	$T_A = 25^{\circ}C$ (Notes 1, 2)	-25 -60	25 60	-75 -200	75 200	$\mu V$
Input Offset Voltage Temperature Sensitivity	$\Delta V_{IO}/\Delta T$	(Note 1)	-0.6	0.6	-1.3	1.3	$\mu V/^{\circ}C$
Input Bias Current	$+I_{IB}$	$T_A = 25^{\circ}C$ (Note 1)	-2 -4	2 4	-3 -6	3 6	nA
	$-I_{IB}$	$T_A = 25^{\circ}C$ (Note 1)	-2 -4	2 4	-3 -6	3 6	
Input Offset Current	$I_{IO}$	$T_A = 25^{\circ}C$ (Note 1)	-2 -4	2 4	-2.8 -5.6	2.8 5.6	nA
	+PSRR	$+V_{CC} = 20V$ to $5V$ , $-V_{CC} = -15V$ $T_A = 25^{\circ}C$	—	10	—	10	
	-PSRR	$+V_{CC} = 15V$ , $-V_{CC} = -20V$ to $-5V$ $T_A = 25^{\circ}C$	—	10	—	10	
	+PSRR	$+V_{CC} = 20V$ to $5V$ , $-V_{CC} = -15V$	—	20	—	20	
	-PSRR	$+V_{CC} = 15V$ , $-V_{CC} = -20V$ to $-5V$	—	20	—	20	
	PSRR	$V_{CC} = \pm 4.5V$ to $\pm 20V$ $T_A = 25^{\circ}C$	—	10	—	10	
		$V_{CC} = \pm 4.5V$ to $\pm 20V$	—	20	—	20	

## NOTES:

- Tested at  $V_{CM} = 0$ ,  $V_{CC} = \pm 15V$ .
- Due to the inherent warm-up drift, testing shall occur no sooner than three (3) minutes after application of power.

5

OPERATIONAL AMPLIFIERS/BUFFERS



**ELECTRICAL CHARACTERISTICS** at  $\pm 4.5V \leq V_{CC} \leq \pm 20V$  and  $-55^\circ C \leq T_A \leq +125^\circ C$ ,  $R_S = 50\Omega$  unnullled, unless otherwise noted. *Continued*

T-79-06-10

PARAMETER	SYMBOL	CONDITIONS	01 LIMITS		U2 LIMITS		UNITS
			MIN	MAX	MIN	MAX	
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 13V, T_A = +25^\circ C, V_{CC} = \pm 15V$	110	-	110	-	dB
		$V_{CM} = \pm 13C, V_{CC} = \pm 15V$	106	-	106	-	
Adjustment for Input Offset	$V_{IO} \text{ Adj (+)}$	$T_A = +25^\circ C$ (Note 1)	0.5	-	0.5	-	mV
	$V_{IO} \text{ Adj (-)}$	$T_A = +25^\circ C$ (Note 1)	-	0.5	-	0.5	
Output Short-Circuit Current	$I_{OS(+)}$	$t \leq 25ms$ (Notes 1, 3) $T_A = +25^\circ C, +125^\circ C$ $T_A = -55^\circ C$	-65	-	-65	-	mA
	$I_{OS(-)}$	$t \leq 25ms$ (Notes 1, 3) $T_A = +25^\circ C, +125^\circ C$ $T_A = -55^\circ C$	-	65	-	65	
Supply Current	$I_{CC}$	$T_A = +25^\circ C$ (Note 1)	-	4	-	4	mA
			-	5	-	5	
Output Voltage Swing (Minimum)	$V_{OP}$	$R_L = 1k\Omega$ (Note 1)	-10	10	-10	10	V
		$R_L = 2k\Omega$ (Note 1)	-12	12	-12	12	
Open-Loop Voltage Gain (Single-Ended)	$A_{VS}$	$T_A = +25^\circ C$ (Notes 1, 2)	300	-	200	-	V/mV
Slew Rate	$SR(+), SR(-)$	$V_{IN} = 10V, T_A = +25^\circ C$ , (Note 1)	0.08	-	0.08	-	V/ $\mu s$
Input Noise Voltage Density	$e_n$	$f_O = 10Hz$	-	18	-	18	nV/ $\sqrt{Hz}$
		$f_O = 100Hz, T_A = +25^\circ C$ (Note 1)	-	14	-	14	
		$f_O = 1kHz$	-	12	-	12	
Low Frequency Input Noise Voltage	$e_{np-p}$	$f = 0.1Hz$ to $10Hz, T_A = 25^\circ C$ , (Note 1)	-	0.6	-	0.6	$\mu V_{p-p}$

**NOTES:**

1. Tested at  $V_{CM} = 0, V_{CC} = \pm 15V$ .
2.  $V_{OUT} = 0$  to  $+10V$  for  $A_{VS(+)}$  and  $V_{OUT} = 0$  to  $-10V$  for  $A_{VS(-)}$ ;  $R_L = 2k\Omega$ .
3. Continuous short-circuit limits are considerably less than the indicated test limits, since maximum power dissipation cannot be exceeded.