阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网,版权归原作者所有。如读者和版权方有任何异议请及时告之,我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译,其目的是协助用户阅读,该译文无法自动跟随原稿更新,同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料,来自厂商的技术支持或者使用者的心得体会等,其内容可能存在描 叙上的差异,建议读者做出适当判断。
- 4.如需与我们联系,请发邮件到marketing@iczoom.com,主题请标有"数据手册"字样。

Read Statement

- 1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
- 2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
- 3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
- 4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



Menlo Park, CA 94025-1164

308 Constitution Drive

Phone: 800-227-4856

www.circuitprotection.com

PolySwitch® PTC Devices

Overcurrent Protection Device

PRODUCT: AGRF800S

DOCUMENT: SCD 26386 PCN: RF0200

REV LETTER: B

REV DATE: MAY 8, 2007 PAGE NO.: 1 OF 2

Raychem Circuit Protection Products

Specification Status: Released

Electrical Rating
Voltage: 16V_{DC} MAX


Insulating Material:


Cured, Flame Retardant Epoxy Polymer

Lead Material:

20 AWG Tin Plated Copper (0.8 mm [0.032] nom. diameter)

Part Marking:





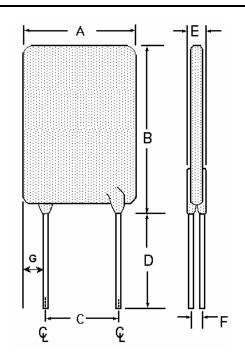


TABLE I. DIMENSIONS:

	Α		В		С		D		E		F	G	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP	MIN	MAX
mm::		12.7	16.0	20.9	4.3	5.8	7.6			3.0	1.2		5.08
in*:		(0.50)	(0.630)	(0.820)	(0.17)	(0.23)	(0.30)			(0.12)	(0.05)		(0.200)

^{*}Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

CURRENT RATINGS			TIME TO TRIP	INITIAL RESISTANCE		R _{1 MAX} 1 HR. POST TRIP RESISTANCE STANDARD TRIP	R _{A MAX}	TRIPPED- STATE POWER DISSIPATION	
	AMPS		SECONDS	OHMS		OHMS	OHMS	WATTS AT	
	AT 25°C		AT 25°C, 40 A	AT 25°C		AT 25°C	AT 25°C	25°C	
HOLD	HOLD	TRIP	MAX	MIN	MAX			TYP	
AT	AT								
R _{1 MAX}	$R_{A\;MAX}$								
8.0	7.6	15.0	5.5	0.0049	0.0113	0.0175	0.0181	3.2	

Reference Documents: PS400, PS300 (reference for R_{1 MAX})

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant ELV Compliant

Pb-Free

Directive 2002/95/EC Compliant Directive 2000/53/EC Compliant



© 2005, 2007 Tyco Electronics Corporation. All rights reserved.



Menlo Park, CA 94025-1164

308 Constitution Drive

Phone: 800-227-4856

www.circuitprotection.com

PolySwitch® PTC Devices

Overcurrent Protection Device

PRODUCT: AGRF800S

DOCUMENT: SCD 26386 PCN: RF0200 REV LETTER: B

REV DATE: MAY 8, 2007 PAGE NO.: 2 OF 2

Raychem Circuit Protection Products

TABLE III. AUTOMOTIVE SPECIFIC STRESS TESTS AND TEST CONDITIONS:

ELECTRICAL STRESS TESTS	TEST CONDITIONS (see note 2)
ESD Voltage Withstand (see note 1)	25kV
Short Circuit Fault Current Durability	25 cycles, 16V, 200A
Fault Current Durability	350 cycles, 16V/100A
End-of-life Mode Verification	1750 cycles, 16V/100A
Jump Start Endurance (see note 1)	3 cycles, 26V, 1 minute duration
Load Dump Endurance (see note 1)	10 cycles, 86.5V

Note 1: The PolySwitch devices are tested in series with a load resistance and the voltages specified in the test conditions are shared between the PolySwitch device and the load resistance as specified in PS400.

Note 2: Please refer to Appendix A of PS400 for the detailed test procedures