

阅读申明

1. 本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
2. 本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
3. 本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
4. 如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

IRF7240PbF

HEXFET® Power MOSFET


- Ultra Low On-Resistance
- P-Channel MOSFET
- Surface Mount
- Available in Tape & Reel
- Lead-Free

V_{DSS}	R_{DS(on)} max	I_D
-40V	0.015@V _{GS} = -10V	-10.5A
	0.025@V _{GS} = -4.5V	-8.4A

Description

These P-Channel MOSFETs from International Rectifier utilize advanced processing techniques to achieve the extremely low on-resistance per silicon area. This benefit provides the designer with an extremely efficient device for use in battery and load management applications..

The SO-8 has been modified through a customized leadframe for enhanced thermal characteristics and multiple-die capability making it ideal in a variety of power applications. With these improvements, multiple devices can be used in an application with dramatically reduced board space. The package is designed for vapor phase, infrared, or wave soldering techniques.

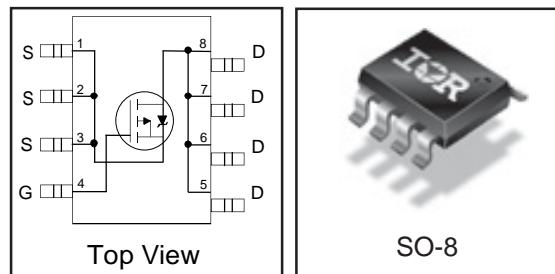

Absolute Maximum Ratings

	Parameter	Max.	Units
V _{DS}	Drain- Source Voltage	-40	V
I _D @ T _A = 25°C	Continuous Drain Current, V _{GS} @ -10V	-10.5	A
I _D @ T _A = 70°C	Continuous Drain Current, V _{GS} @ -10V	-8.6	
I _{DM}	Pulsed Drain Current ①	-43	W
P _D @ T _A = 25°C	Power Dissipation ②	2.5	
P _D @ T _A = 70°C	Power Dissipation③	1.6	mW/°C
	Linear Derating Factor	20	
V _{GS}	Gate-to-Source Voltage	± 20	V
T _J , T _{STG}	Junction and Storage Temperature Range	-55 to + 150	°C

Thermal Resistance

	Parameter	Max.	Units
R _{0JA}	Maximum Junction-to-Ambient④	50	°C/W


IRF7240PbF

International
Rectifier

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(\text{BR})\text{DSS}}$	Drain-to-Source Breakdown Voltage	-40	—	—	V	$V_{\text{GS}} = 0\text{V}$, $I_D = -250\mu\text{A}$
$\Delta V_{(\text{BR})\text{DSS}/\Delta T_J}$	Breakdown Voltage Temp. Coefficient	—	-0.025	—	V/ $^\circ\text{C}$	Reference to 25°C , $I_D = -1\text{mA}$
$R_{\text{DS}(\text{on})}$	Static Drain-to-Source On-Resistance	—	—	0.015	Ω	$V_{\text{GS}} = -10\text{V}$, $I_D = -10.5\text{A}$ ②
		—	—	0.025	Ω	$V_{\text{GS}} = -4.5\text{V}$, $I_D = -8.4\text{A}$ ②
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	-1.0	—	-3.0	V	$V_{\text{DS}} = V_{\text{GS}}$, $I_D = -250\mu\text{A}$
g_{fs}	Forward Transconductance	17	—	—	S	$V_{\text{DS}} = -10\text{V}$, $I_D = -10.5\text{A}$
I_{DSS}	Drain-to-Source Leakage Current	—	—	-15	μA	$V_{\text{DS}} = -32\text{V}$, $V_{\text{GS}} = 0\text{V}$
		—	—	-25	μA	$V_{\text{DS}} = -32\text{V}$, $V_{\text{GS}} = 0\text{V}$, $T_J = 70^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	—	—	-100	nA	$V_{\text{GS}} = -20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	100	nA	$V_{\text{GS}} = 20\text{V}$
Q_g	Total Gate Charge	—	73	110	nC	$I_D = -10.5\text{A}$
Q_{gs}	Gate-to-Source Charge	—	31	47	nC	$V_{\text{DS}} = -20\text{V}$
Q_{gd}	Gate-to-Drain ("Miller") Charge	—	17	26	nC	$V_{\text{GS}} = -10\text{V}$
$t_{\text{d}(\text{on})}$	Turn-On Delay Time	—	52	—	ns	$V_{\text{DD}} = -20\text{V}$ ②
t_r	Rise Time	—	490	—		$I_D = -1.0\text{A}$
$t_{\text{d}(\text{off})}$	Turn-Off Delay Time	—	210	—		$R_G = 6.0\Omega$
t_f	Fall Time	—	97	—		$V_{\text{GS}} = -10\text{V}$
C_{iss}	Input Capacitance	—	9250	—	pF	$V_{\text{GS}} = 0\text{V}$
C_{oss}	Output Capacitance	—	580	—		$V_{\text{DS}} = -25\text{V}$
C_{rss}	Reverse Transfer Capacitance	—	520	—		$f = 1.0\text{kHz}$

Source-Drain Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	—	—	-2.5	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	-43		
V_{SD}	Diode Forward Voltage	—	—	-1.2		$T_J = 25^\circ\text{C}$, $I_S = -2.5\text{A}$, $V_{\text{GS}} = 0\text{V}$ ②
t_{rr}	Reverse Recovery Time	—	43	65		$T_J = 25^\circ\text{C}$, $I_F = -2.5\text{A}$
Q_{rr}	Reverse Recovery Charge	—	75	110	nC	$dI/dt = -100\text{A}/\mu\text{s}$ ②

Notes:

① Repetitive rating; pulse width limited by max. junction temperature.

③ Surface mounted on 1 in square Cu board, $t \leq 5\text{sec}$.

② Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.

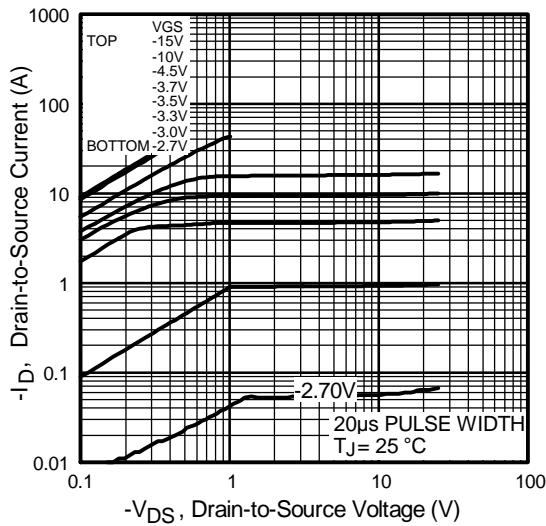


Fig 1. Typical Output Characteristics

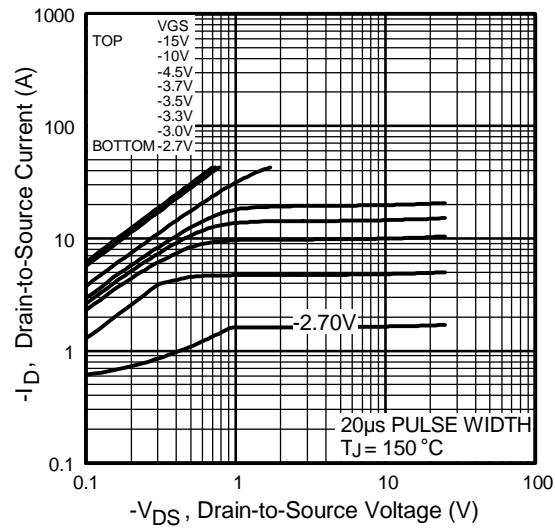


Fig 2. Typical Output Characteristics

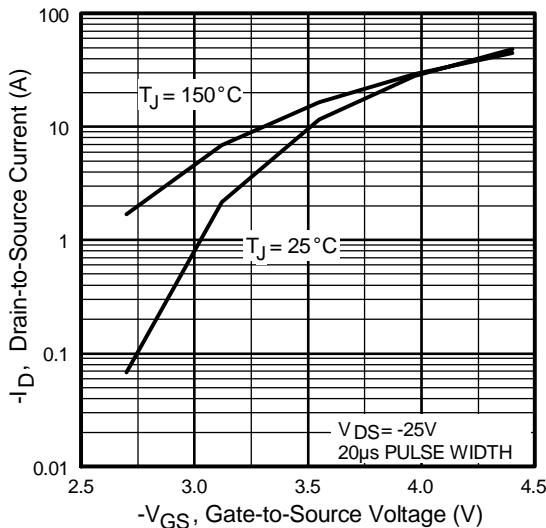


Fig 3. Typical Transfer Characteristics

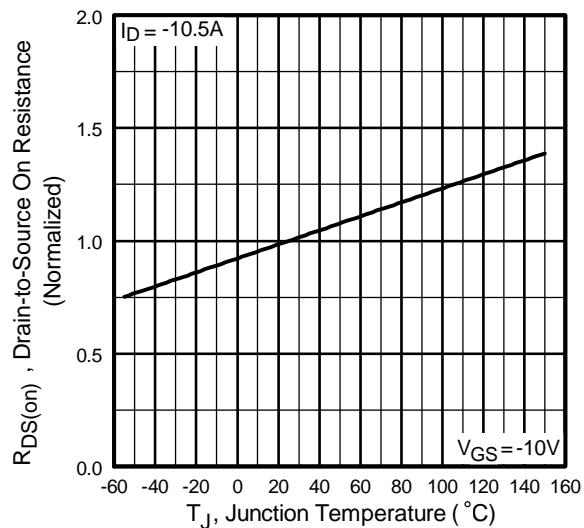


Fig 4. Normalized On-Resistance
Vs. Temperature

IRF7240PbF

International
Rectifier

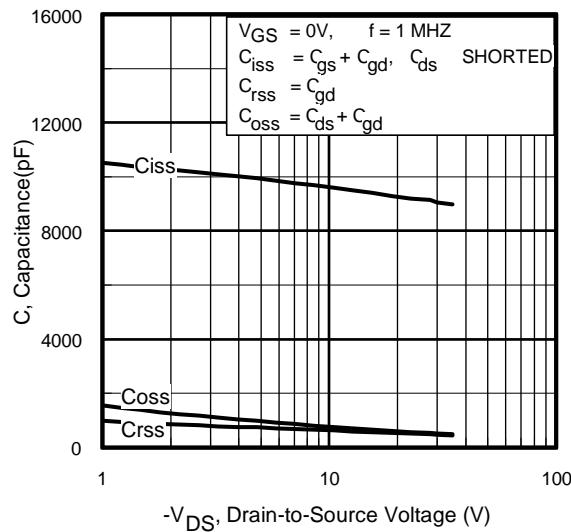


Fig 5. Typical Capacitance Vs.
Drain-to-Source Voltage

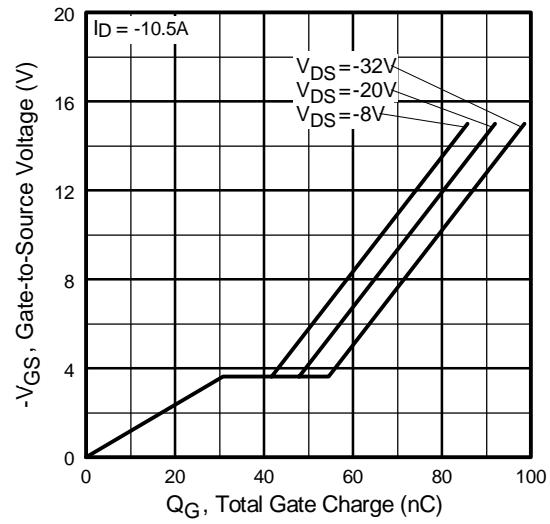


Fig 6. Typical Gate Charge Vs.
Gate-to-Source Voltage

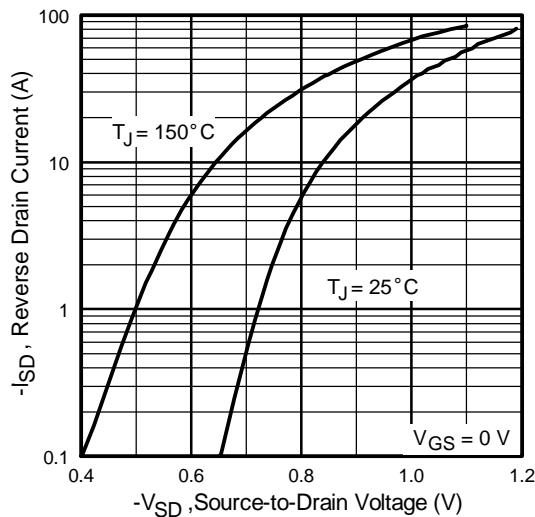


Fig 7. Typical Source-Drain Diode
Forward Voltage

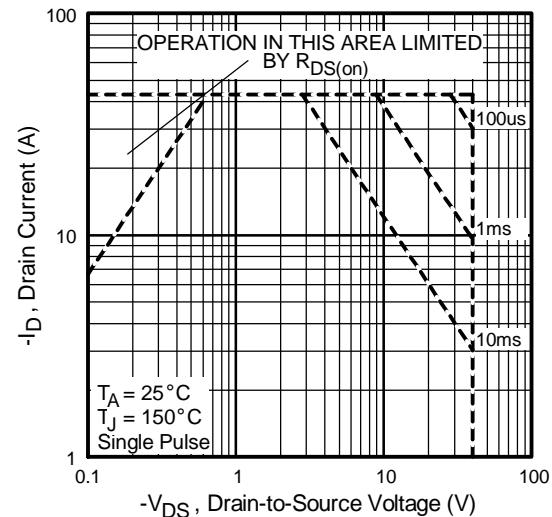


Fig 8. Maximum Safe Operating Area

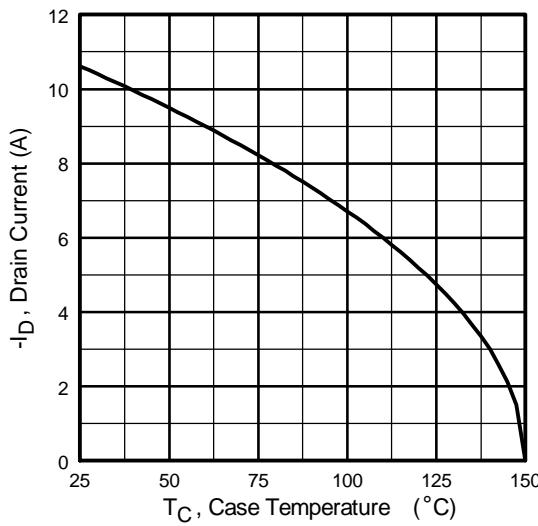


Fig 9. Maximum Drain Current Vs.
Case Temperature

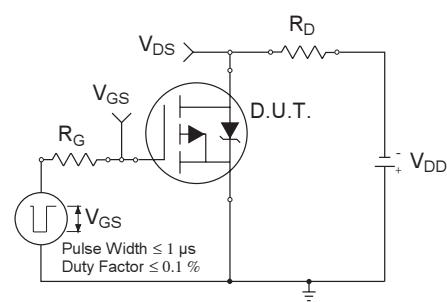


Fig 10a. Switching Time Test Circuit

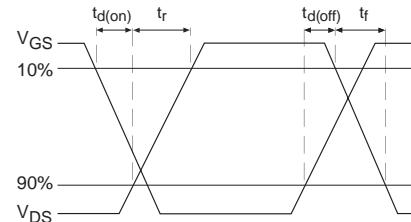


Fig 10b. Switching Time Waveforms

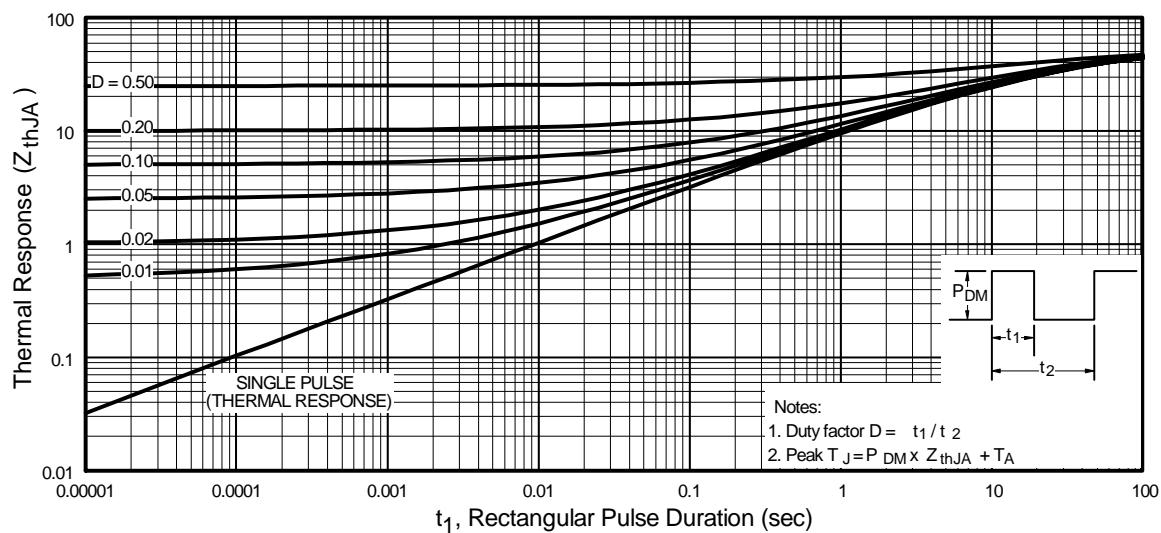


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

IRF7240PbF

International
Rectifier

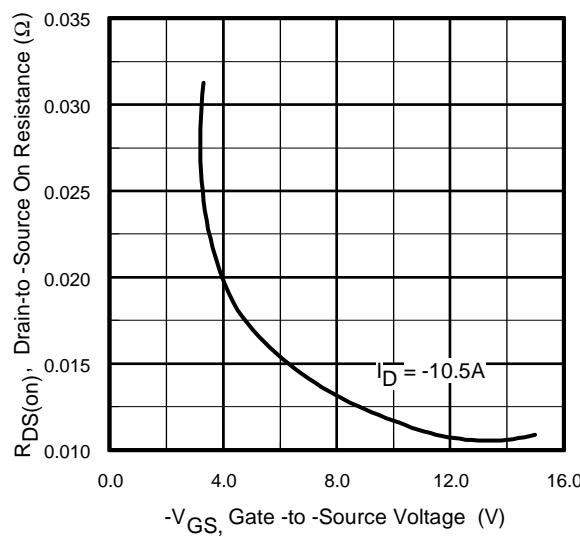


Fig 12. Typical On-Resistance Vs.
Gate Voltage

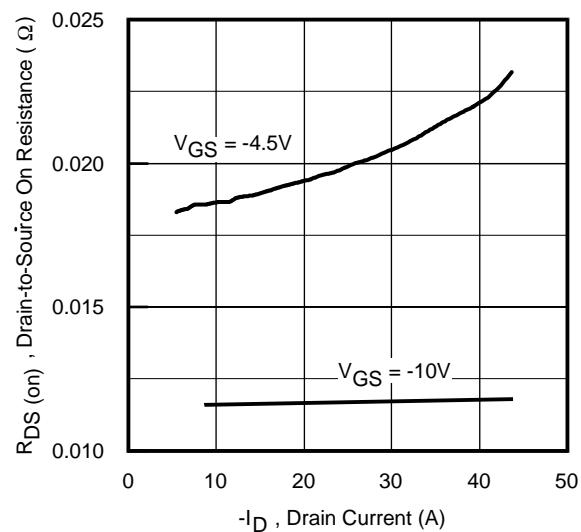


Fig 13. Typical On-Resistance Vs.
Drain Current

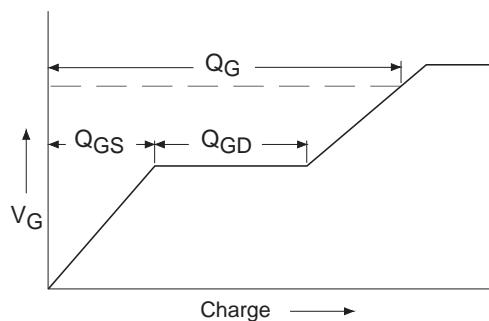


Fig 14a. Basic Gate Charge Waveform

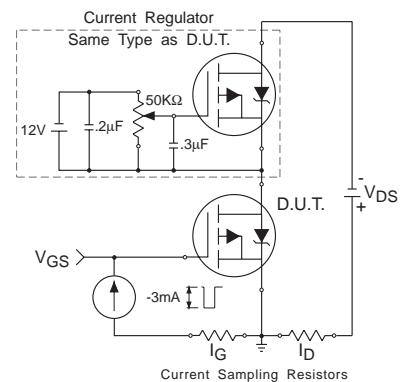


Fig 14b. Gate Charge Test Circuit

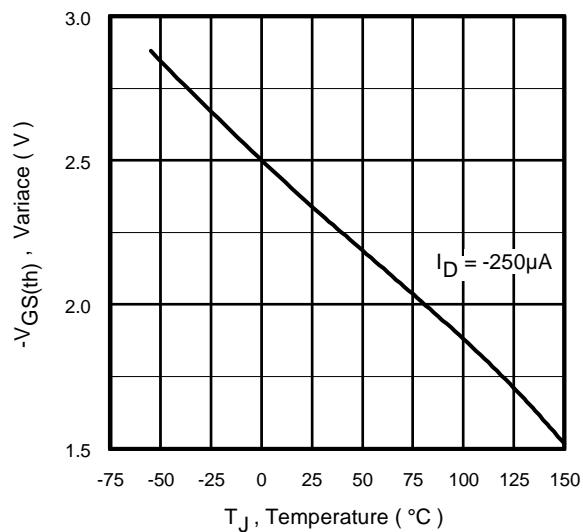


Fig 15. Typical $V_{GS(th)}$ Variance Vs.
Junction Temperature


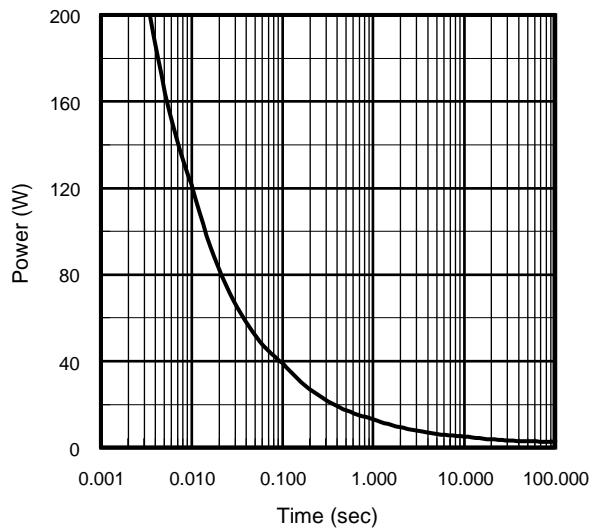




Fig 16. Typical Power Vs. Time

SO-8 Package Outline


Dimensions are shown in millimeters (inches)

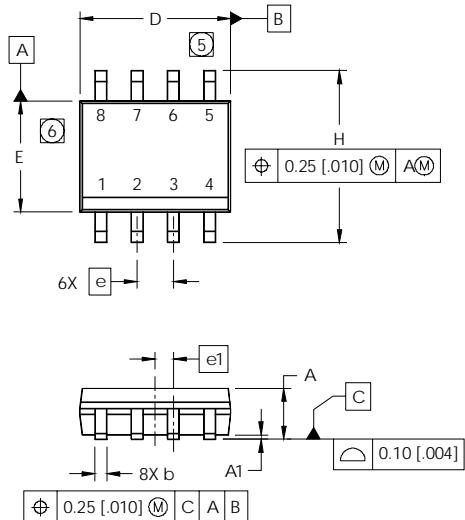

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.189	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e	.050	BASIC	1.27	BASIC
e1	.025	BASIC	0.635	BASIC
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
y	0°	8°	0°	8°

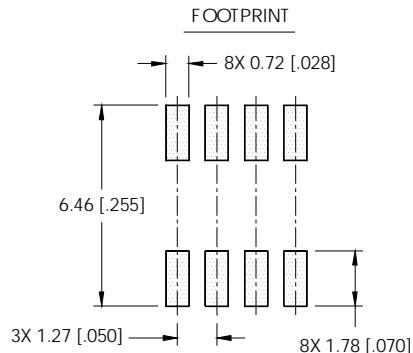
**SO-8 Part Marking**

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

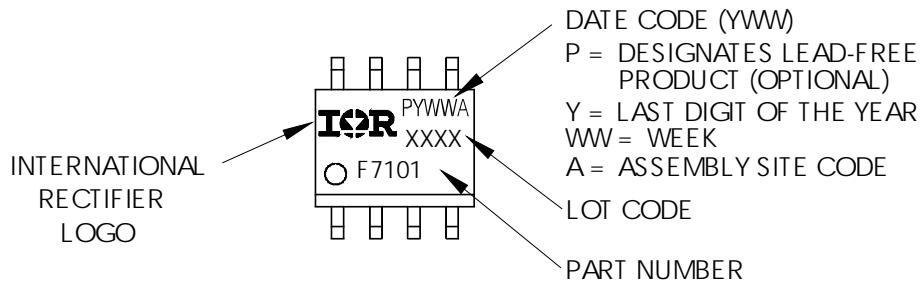


SO-8 Tape and Reel

Dimensions are shown in millimeters (inches)

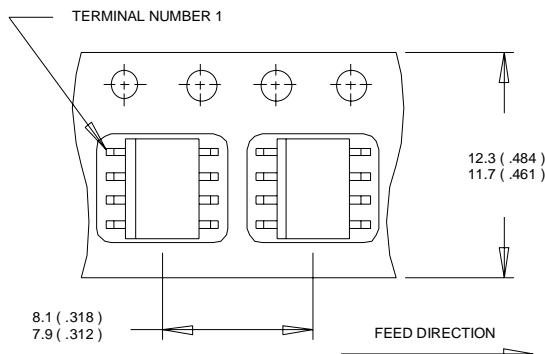

NOTES:

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

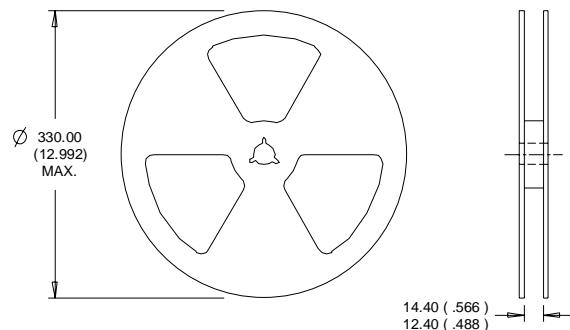

NOTES :

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.
 This product has been designed and qualified for the Consumer market.
 Qualifications Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
 TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information. 06/05