

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

ANY2002B

High Frequency, Single Chip, One-output Clock Generator

AnyCLK

Service depends on time

Features

- Any frequency between 115 MHz to 137 MHz accurate to 6 decimal places of accuracy
- Operating temperature from -40°C to 85°C. Refer to [ANY2019](#) for -40°C to 125°C and [ANY2021](#) for -55°C to 125°C options
- Excellent total frequency stability as low as ±20 PPM
- Low power consumption of 4.9 mA typical at 1.8V
- LVC MOS/LVTTL compatible output
- 5-pin SOT23-5: 2.9mm x 2.8mm
- RoHS and REACH compliant, Pb-free, Halogen-free and Antimony-free
- For AEC-Q100 oscillators, refer to [ANY2024](#) and [ANY2025](#)

Applications

- GE PON, network switches, routers, servers, embedded systems, industrial and medical devices
- Ethernet, PCI-E, DDR, etc.



INSTANT
SAMPLES



GREEN
SOLUTIONS



LIFETIME
WARRANTY

Electrical Specifications

Table 1. Electrical Characteristics

All Min and Max limits are specified over temperature and rated operating voltage with 15 pF output load unless otherwise stated. Typical values are at 25°C and nominal supply voltage.

| Parameters | Symbol | Min. | Typ. | Max. | Unit | Condition |
|---|--------|------|------|------|------|---|
| Frequency Range | | | | | | |
| Output Frequency Range | f | 115 | – | 137 | MHz | |
| Frequency Stability and Aging | | | | | | |
| Frequency Stability | F_stab | -20 | – | +20 | PPM | Inclusive of Initial tolerance at 25°C, 1st year aging at 25°C, and variations over operating temperature, rated power supply voltage and load (15 pF ± 10%). |
| | | -25 | – | +25 | PPM | |
| | | -50 | – | +50 | PPM | |
| Operating Temperature Range | | | | | | |
| Operating Temperature Range (Ambient) | T_use | -20 | – | +70 | °C | Extended Commercial |
| | | -40 | – | +85 | °C | Industrial |
| Supply Voltage and Current Consumption | | | | | | |
| Supply Voltage | Vdd | 1.62 | 1.8 | 1.98 | V | |
| | | 2.25 | 2.5 | 2.75 | V | |
| | | 2.52 | 2.8 | 3.08 | V | |
| | | 2.7 | 3.0 | 3.3 | V | |
| | | 2.97 | 3.3 | 3.63 | V | |
| | | 2.25 | – | 3.63 | V | |
| Current Consumption | Idd | – | 6.2 | 7.5 | mA | No load condition, f = 125 MHz, Vdd = 2.8V, 3.0V, 3.3V or 2.25 to 3.63V |
| | | – | 5.5 | 6.4 | mA | No load condition, f = 125 MHz, Vdd = 2.5V |
| | | – | 4.9 | 5.6 | mA | No load condition, f = 125 MHz, Vdd = 1.8V |
| OE Disable Current | I_od | – | – | 4.3 | mA | Vdd = 2.5V to 3.3V, OE = Low, Output in high Z state |
| | | – | – | 4.1 | mA | Vdd = 1.8V, OE = Low, Output in high Z state |
| Standby Current | I_std | – | 2.6 | 4.3 | µA | Vdd = 2.8V to 3.3V, \overline{ST} = Low, Output is weakly pulled down |
| | | – | 1.4 | 2.5 | µA | Vdd = 2.5V, \overline{ST} = Low, Output is weakly pulled down |
| | | – | 0.6 | 1.3 | µA | Vdd = 1.8V, \overline{ST} = Low, Output is weakly pulled down |
| LVC MOS Output Characteristics | | | | | | |
| Duty Cycle | DC | 45 | – | 55 | % | All Vdds |
| Rise/Fall Time | Tr, Tf | – | 1.0 | 2.0 | ns | Vdd = 2.5V, 2.8V, 3.0V or 3.3V, 20% - 80% |
| | | – | 1.3 | 2.5 | ns | Vdd = 1.8V, 20% - 80% |
| | | – | 1.0 | 2.0 | ns | Vdd = 2.25V - 3.63V, 20% - 80% |
| Output High Voltage | VOH | 90% | – | – | Vdd | IOH = -4 mA (Vdd = 3.0V or 3.3V) IOH = -3 mA (Vdd = 2.8V and Vdd = 2.5V) IOH = -2 mA (Vdd = 1.8V) |
| Output Low Voltage | VOL | – | – | 10% | Vdd | IOL = 4 mA (Vdd = 3.0V or 3.3V) IOL = 3 mA (Vdd = 2.8V and Vdd = 2.5V) IOL = 2 mA (Vdd = 1.8V) |
| Input Characteristics | | | | | | |
| Input High Voltage | VIH | 70% | – | – | Vdd | Pin 1, OE or \overline{ST} |
| Input Low Voltage | VIL | – | – | 30% | Vdd | Pin 1, OE or \overline{ST} |
| Input Pull-up Impedance | Z_in | 50 | 87 | 150 | kΩ | Pin 1, OE logic high or logic low, or \overline{ST} logic high |
| | | 2 | – | – | MΩ | Pin 1, \overline{ST} logic low |

Table 1. Electrical Characteristics (continued)

| Parameters | Symbol | Min. | Typ. | Max. | Unit | Condition |
|----------------------------------|----------|------|------|------|------|---|
| Startup and Resume Timing | | | | | | |
| Startup Time | T_start | – | – | 5 | ms | Measured from the time Vdd reaches its rated minimum value |
| Enable/Disable Time | T_oe | – | – | 130 | ns | f = 115 MHz. For other frequencies, T_oe = 100 ns + 3 □ clock periods |
| Resume Time | T_resume | – | – | 5 | ms | Measured from the time ST pin crosses 50% threshold |
| Jitter | | | | | | |
| RMS Period Jitter | T_jitt | – | 1.9 | 3 | ps | f = 125 MHz, Vdd = 2.5V, 2.8V, 3.0V or 3.3V |
| | | – | 1.6 | 4 | ps | f = 125 MHz, Vdd = 1.8V |
| Peak-to-peak Period Jitter | T_pk | – | 12 | 20 | ps | f = 125 MHz, Vdd = 2.5V, 2.8V, 3.0V or 3.3V |
| | | – | 14 | 30 | ps | f = 125 MHz, Vdd = 1.8V |
| RMS Phase Jitter (random) | T_phj | – | 0.5 | 0.9 | ps | Integration bandwidth = 900 kHz to 7.5 MHz |
| | | – | 1.3 | 2 | ps | Integration bandwidth = 12 kHz to 20 MHz |

Table 2. Pin Description

| Pin | Symbol | Power | Functionality |
|-----|-------------------------|---------------|---|
| 1 | GND | Power | Electrical ground |
| 2 | NC | No Connect | No connect |
| 3 | OE/ \overline{ST} /NC | Output Enable | H ^[1] : specified frequency output L: output is high impedance. Only output driver is disabled. |
| | | Standby | H or Open ^[1] : specified frequency output L: output is low (weak pull down). Device goes to sleep mode. Supply current reduces to I_std. |
| | | No Connect | Any voltage between 0 and Vdd or Open ^[1] : Specified frequency output. Pin 3 has no function. |
| 4 | VDD | Power | Power supply voltage ^[2] |
| 5 | OUT | Output | Oscillator output |

Notes:

1. In OE or ST mode, a pull-up resistor of 10 k or less is recommended if pin 3 is not externally driven. If pin 3 needs to be left floating, use the NC option.
2. A capacitor of value 0.1 μF or higher between Vdd and GND is required.

Top View




Figure 1. Pin Assignments

Table 3. Absolute Maximum Limits

Attempted operation outside the absolute maximum ratings of the part may cause permanent damage to the part. Actual performance of the IC is only guaranteed within the operational specifications, not at absolute maximum ratings.

| Parameter | Min. | Max. | Unit |
|--|------|------|------|
| Storage Temperature | -65 | 150 | °C |
| Vdd | -0.5 | 4 | V |
| Electrostatic Discharge | – | 2000 | V |
| Soldering Temperature (follow standard Pb free soldering guidelines) | – | 260 | °C |
| Junction Temperature ^[3] | – | 150 | °C |

Note:

3. Exceeding this temperature for extended period of time may damage the device.

Table 4. Thermal Consideration^[4]

| Package | θ_{JA} , 4 Layer Board (°C/W) | θ_{JC} , Bottom (°C/W) |
|---------|--------------------------------------|-------------------------------|
| SOT23-5 | 421 | 175 |

Note:

4. Refer to JESD51 for θ_{JA} and θ_{JC} definitions, and reference layout used to determine the θ_{JA} and θ_{JC} values in the above table.

Table 5. Maximum Operating Junction Temperature^[5]

| Max Operating Temperature | Maximum Operating Junction Temperature |
|---------------------------|--|
| 70°C | 80°C |
| 85°C | 95°C |

Note:

5. Datasheet specifications are not guaranteed if junction temperature exceeds the maximum operating junction temperature.

Table 6. Environmental Compliance

| Parameter | Condition/Test Method |
|----------------------------|---------------------------|
| Mechanical Shock | MIL-STD-883F, Method 2002 |
| Mechanical Vibration | MIL-STD-883F, Method 2007 |
| Temperature Cycle | JESD22, Method A104 |
| Solderability | MIL-STD-883F, Method 2003 |
| Moisture Sensitivity Level | MSL1 @ 260°C |

Test Circuit and Waveform^[6]

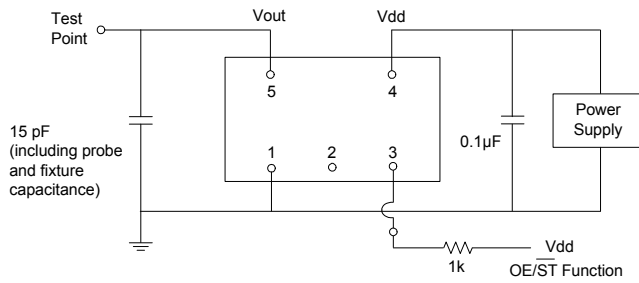


Figure 2. Test Circuit


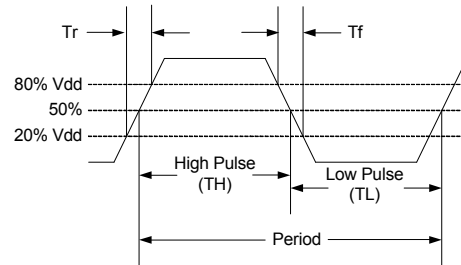


Figure 3. Output Waveform

Note:


6. Duty Cycle is computed as $Duty\ Cycle = TH/Period$.

Timing Diagrams

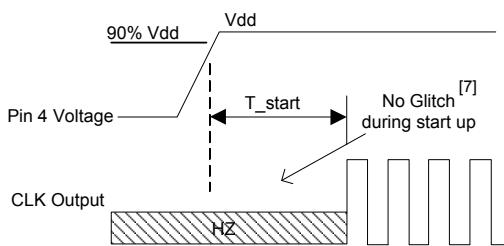


T_{start} : Time to start from power-off

Figure 4. Startup Timing (OE/ST Mode)

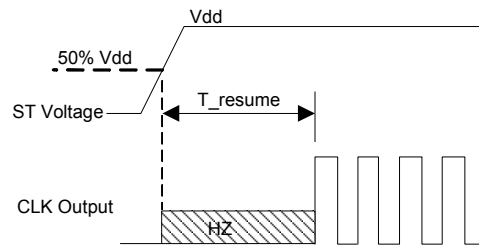


T_{resume} : Time to resume from ST

Figure 5. Standby Resume Timing (ST Mode Only)

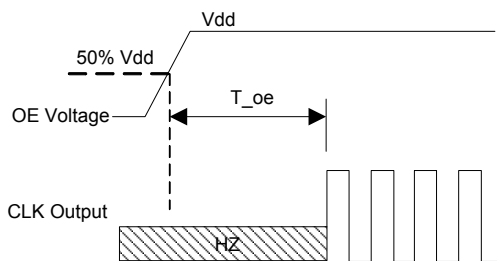

T_{oe} : Time to re-enable the clock output

Figure 6. OE Enable Timing (OE Mode Only)

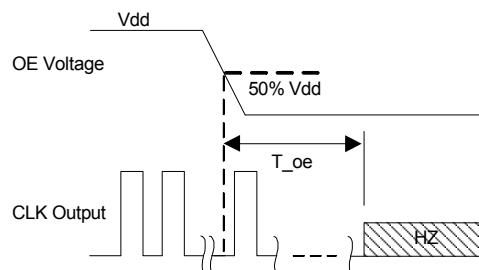

T_{oe} : Time to put the output in High Z mode

Figure 7. OE Disable Timing (OE Mode Only)

Note:

7. ANY2002 has "no runt" pulses and "no glitch" output during startup or resume.

Performance Plots^[8]

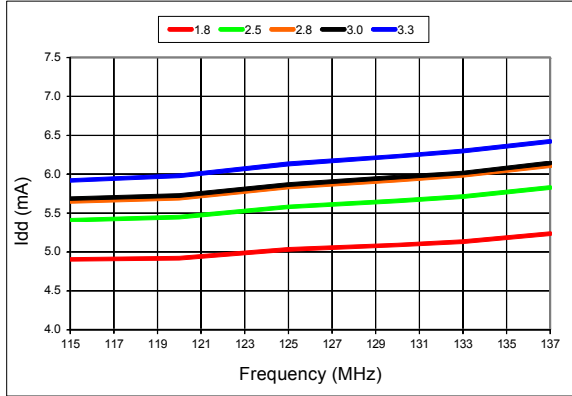


Figure 8. Idd vs Frequency

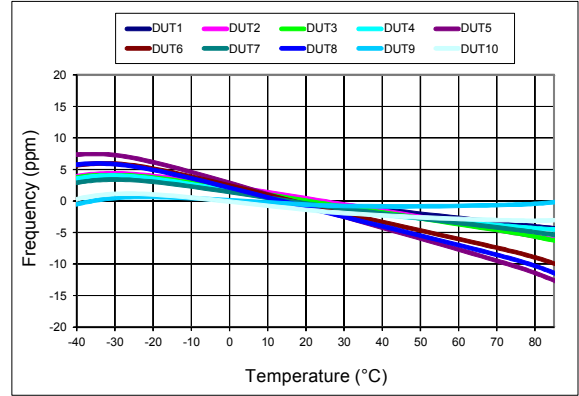


Figure 9. Frequency vs Temperature, 1.8V

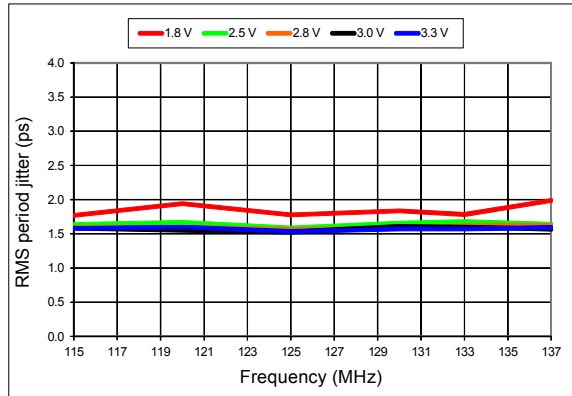


Figure 10. RMS Period Jitter vs Frequency

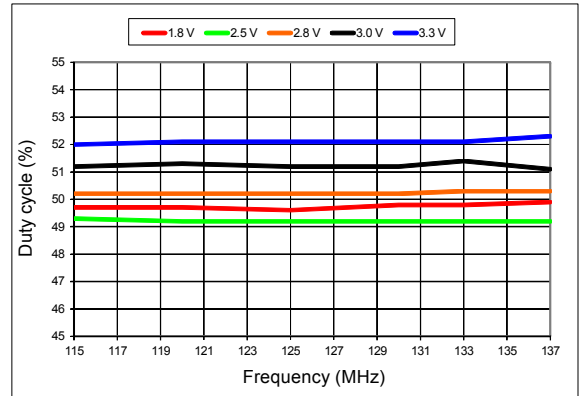


Figure 11. Duty Cycle vs Frequency

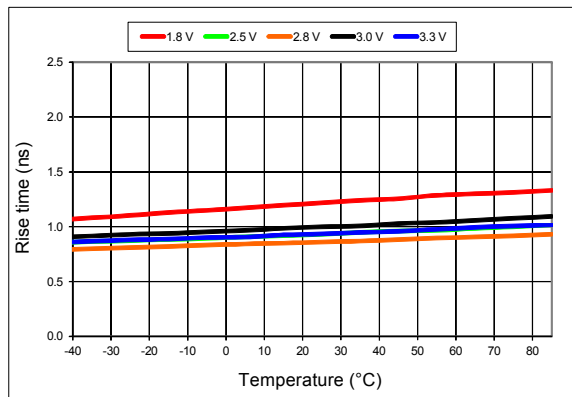


Figure 12. 20%-80% Rise Time vs Temperature

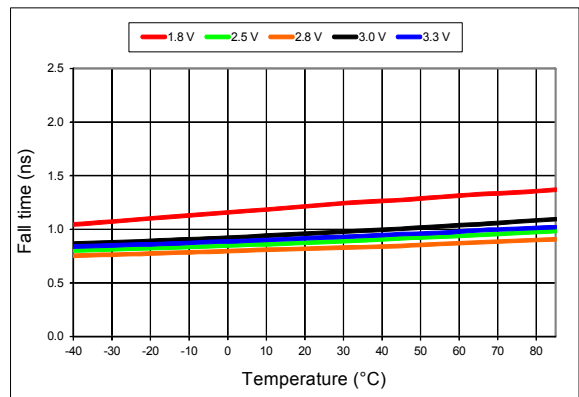


Figure 13. 20%-80% Fall Time vs Temperature

Performance Plots^[8]

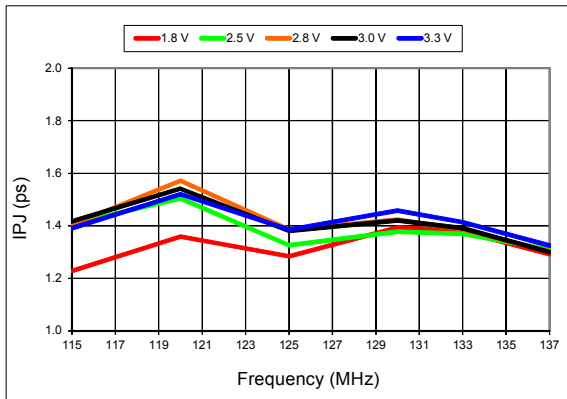


Figure 14. RMS Integrated Phase Jitter Random (12 kHz to 20 MHz) vs Frequency^[9]

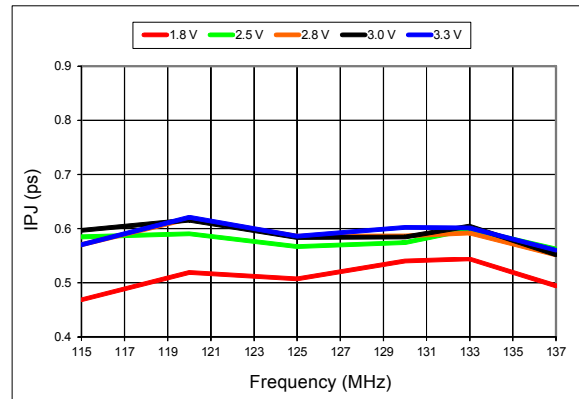


Figure 15. RMS Integrated Phase Jitter Random (900 kHz to 20 MHz) vs Frequency^[9]

Notes:

- 8. All plots are measured with 15 pF load at room temperature, unless otherwise stated.
- 9. Phase noise plots are measured with Agilent E5052B signal source analyzer.

Programmable Drive Strength

The ANY2002 includes a programmable drive strength feature to provide a simple, flexible tool to optimize the clock rise/fall time for specific applications. Benefits from the programmable drive strength feature are:

- Improves system radiated electromagnetic interference (EMI) by slowing down the clock rise/fall time.
- Improves the downstream clock receiver's (RX) jitter by decreasing (speeding up) the clock rise/fall time.
- Ability to drive large capacitive loads while maintaining full swing with sharp edge rates.

For more detailed information about rise/fall time control and drive strength selection, see the Anyclk Application Notes.

EMI Reduction by Slowing Rise/Fall Time

Figure 16 shows the harmonic power reduction as the rise/fall times are increased (slowed down). The rise/fall times are expressed as a ratio of the clock period. For the ratio of 0.05, the signal is very close to a square wave. For the ratio of 0.45, the rise/fall times are very close to near-triangular waveform. These results, for example, show that the 11th clock harmonic can be reduced by 35 dB if the rise/fall edge is increased from 5% of the period to 45% of the period.

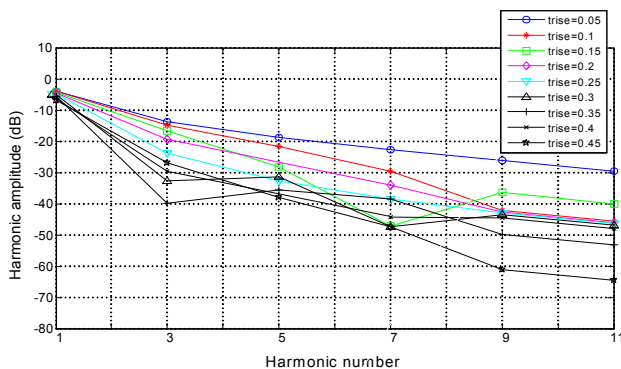


Figure 16. Harmonic EMI reduction as a Function of Slower Rise/Fall Time

Jitter Reduction with Faster Rise/Fall Time

Power supply noise can be a source of jitter for the downstream chipset. One way to reduce this jitter is to speed up the rise/fall time of the input clock. Some chipsets may also require faster rise/fall time in order to reduce their sensitivity to this type of jitter. Refer to the [Rise/Fall Time Tables \(Table 7 to Table 11\)](#) to determine the proper drive strength.

High Output Load Capability

The rise/fall time of the input clock varies as a function of the actual capacitive load the clock drives. At any given drive strength, the rise/fall time becomes slower as the output load increases. As an example, for a 3.3V ANY2002 device with default drive strength setting, the typical rise/fall time is 1ns for 15 pF output load. The typical rise/fall time slows down to 2.6 ns when the output load increases to 45 pF. One can choose to speed up the rise/fall time to 1.83 ns by then increasing the drive strength setting on the ANY2002.

The ANY2002 can support up to 30 pF maximum capacitive loads with drive strength settings. Refer to the [Rise/Fall Time Tables \(Table 7 to 11\)](#) to determine the proper drive strength for the desired combination of output load vs. rise/fall time.

ANY2002 Drive Strength Selection

Tables 7 through 11 define the rise/fall time for a given capacitive load and supply voltage.

1. Select the table that matches the ANY2002 nominal supply voltage (1.8V, 2.5V, 2.8V, 3.0V, 3.3V).
2. Select the capacitive load column that matches the application requirement (5 pF to 30 pF)
3. Under the capacitive load column, select the desired rise/fall times.
4. The left-most column represents the part number code for the corresponding drive strength.
5. Add the drive strength code to the part number for ordering purposes.

Calculating Maximum Frequency

Based on the rise and fall time data given in Tables 7 through 11, the maximum frequency the oscillator can operate with guaranteed full swing of the output voltage over temperature can be determined as follows:

$$\text{Max Frequency} = \frac{1}{5 \times \text{Trf}_{20/80}}$$

where $\text{Trf}_{20/80}$ is the typical value for 20%-80% rise/fall time.

Example 1

Calculate f_{MAX} for the following condition:

- Vdd = 3.3V (Table 11)
- Capacitive Load: 30 pF
- Desired Tr/f time = 1.31 ns (rise/fall time part number code = F)

Part number for the above example:

ANY2002BIF12-18E-137.000000



Drive strength code is inserted here. Default setting is “_”

Rise/Fall Time (20% to 80%) vs C_{LOAD} Tables

Table 7. V_{dd} = 1.8V Rise/Fall Times for Specific C_{LOAD}

| Rise/Fall Time Typ (ns) | | | |
|------------------------------------|------|-------|-------|
| Drive Strength \ C _{LOAD} | 5 pF | 15 pF | 30 pF |
| T | 0.93 | n/a | n/a |
| E | 0.78 | n/a | n/a |
| U | 0.70 | 1.48 | n/a |
| F or "-": default | 0.65 | 1.30 | n/a |

Table 8. V_{dd} = 2.5V Rise/Fall Times for Specific C_{LOAD}

| Rise/Fall Time Typ (ns) | | | |
|------------------------------------|------|-------|-------|
| Drive Strength \ C _{LOAD} | 5 pF | 15 pF | 30 pF |
| R | 1.45 | n/a | n/a |
| B | 1.09 | n/a | n/a |
| T | 0.62 | 1.28 | n/a |
| E | 0.54 | 1.00 | n/a |
| U or "-": default | 0.43 | 0.96 | n/a |
| F | 0.34 | 0.88 | n/a |

Table 9. V_{dd} = 2.8V Rise/Fall Times for Specific C_{LOAD}

| Rise/Fall Time Typ (ns) | | | |
|------------------------------------|------|-------|-------|
| Drive Strength \ C _{LOAD} | 5 pF | 15 pF | 30 pF |
| R | 1.29 | n/a | n/a |
| B | 0.97 | n/a | n/a |
| T | 0.55 | 1.12 | n/a |
| E | 0.44 | 1.00 | n/a |
| U or "-": default | 0.34 | 0.88 | n/a |
| F | 0.29 | 0.81 | 1.48 |

Table 10. V_{dd} = 3.0V Rise/Fall Times for Specific C_{LOAD}

| Rise/Fall Time Typ (ns) | | | |
|------------------------------------|------|-------|-------|
| Drive Strength \ C _{LOAD} | 5 pF | 15 pF | 30 pF |
| R | 1.22 | n/a | n/a |
| B | 0.89 | n/a | n/a |
| T or "-": default | 0.51 | 1.00 | n/a |
| E | 0.38 | 0.92 | n/a |
| U | 0.30 | 0.83 | n/a |
| F | 0.27 | 0.76 | 1.39 |

Table 11. V_{dd} = 3.3V Rise/Fall Times for Specific C_{LOAD}

| Rise/Fall Time Typ (ns) | | | |
|------------------------------------|------|-------|-------|
| Drive Strength \ C _{LOAD} | 5 pF | 15 pF | 30 pF |
| R | 1.16 | n/a | n/a |
| B | 0.81 | n/a | n/a |
| T or "-": default | 0.46 | 1.00 | n/a |
| E | 0.33 | 0.87 | n/a |
| U | 0.28 | 0.79 | 1.46 |
| F | 0.25 | 0.72 | 1.31 |

Note:

10. "n/a" in Table 7 to Table 11 indicates that the resulting rise/fall time from the respective combination of the drive strength and output load does not provide rail-to-rail swing and is not available.

Pin 3 Configuration Options (OE, \overline{ST} or NC)

Pin 3 of the ANY2002 can be factory-programmed to support three modes: Output Enable (OE), standby (\overline{ST}) or No Connect (NC). These modes can also be programmed with the Time Machine using field programmable devices.

Output Enable (OE) Mode

In the OE mode, applying logic Low to the OE pin only disables the output driver and puts it in Hi-Z mode. The core of the device continues to operate normally. Power consumption is reduced due to the inactivity of the output. When the OE pin is pulled High, the output is typically enabled in $<1\mu\text{s}$.

Standby (\overline{ST}) Mode

In the \overline{ST} mode, a device enters into the standby mode when Pin 3 pulled Low. All internal circuits of the device are turned off. The current is reduced to a standby current, typically in the range of a few μA . When \overline{ST} is pulled High, the device goes through the “resume” process, which can take up to 5 ms.

No Connect (NC) Mode

In the NC mode, the device always operates in its normal mode and outputs the specified frequency regardless of the logic level on pin 3.

Table 12 below summarizes the key relevant parameters in the operation of the device in OE, \overline{ST} , or NC mode.

Table 12. OE vs. \overline{ST} vs. NC

| | OE | \overline{ST} | NC |
|---|--------|-------------------|--------|
| Active current 125 MHz (max, 1.8V) | 5.6 mA | 5.6 mA | 5.6 mA |
| OE disable current (max, 1.8V) | 4.1 mA | N/A | N/A |
| Standby current (typical 1.8V) | N/A | 0.6 μA | N/A |
| OE enable time at 125 MHz (max) | 130 ns | N/A | N/A |
| Resume time from standby (max, all frequency) | N/A | 5 ms | N/A |
| Output driver in OE disable/standby mode | High Z | weak pull-down | N/A |

Output on Startup and Resume

The ANY2002 comes with gated output. Its clock output is accurate to the rated frequency stability within the first pulse from initial device startup or resume from the standby mode.

In addition, the ANY2002 supports “no runt” pulses and “no glitch” output during startup or resume as shown in the waveform captures in Figure 17 and Figure 18.

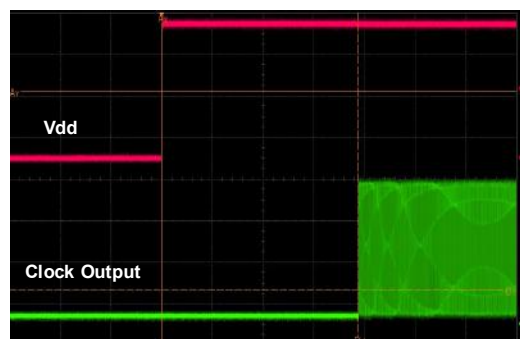


Figure 17. Startup Waveform vs. Vdd


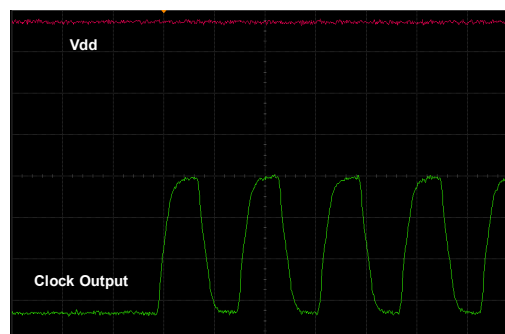


Figure 18. Startup Waveform vs. Vdd (Zoomed-in View of Figure 17)

Dimensions and Patterns

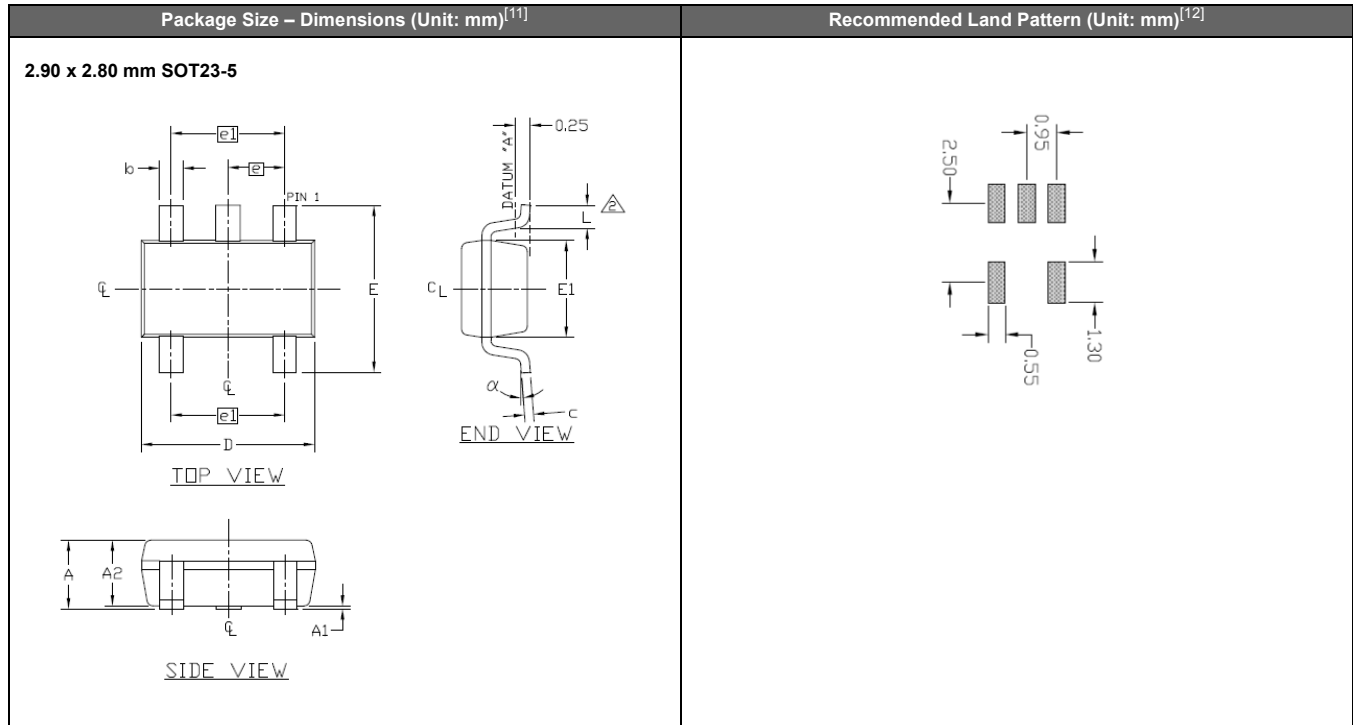

Notes:

- 11. Top marking: Y denotes manufacturing origin and XXXX denotes manufacturing lot number. The value of "Y" will depend on the assembly location of the device.
- 12. A capacitor value of 0.1 μ F between Vdd and GND is required.

Table 13. Dimension Table

| Symbol | Min. | Nom. | Max. |
|----------|-----------|-------|------|
| A | 0.90 | 1.25 | 1.45 |
| A1 | 0.00 | 0.05 | 0.15 |
| A2 | 0.90 | 1.10 | 1.30 |
| b | 0.35 | 0.40 | 0.50 |
| c | 0.08 | 0.15 | 0.20 |
| D | 2.80 | 2.90 | 3.00 |
| E | 2.60 | 2.80 | 3.00 |
| E1 | 1.50 | 1.625 | 1.75 |
| L | 0.35 | 0.45 | 0.60 |
| L1 | 0.60 REF | | |
| e | 0.95 BSC. | | |
| e1 | 1.90 BSC. | | |
| α | 0° | 2.5° | 8° |

ANY2002B

High Frequency, Single Chip, One-output Clock Generator

AnyCLK

Service depends on time

Ordering Information

The Part No. Guide is for reference only. To customize and build an exact part number, use the Anyclk [Part Number Generator](#).

ANY2002BC-S2-18E-125.123456D

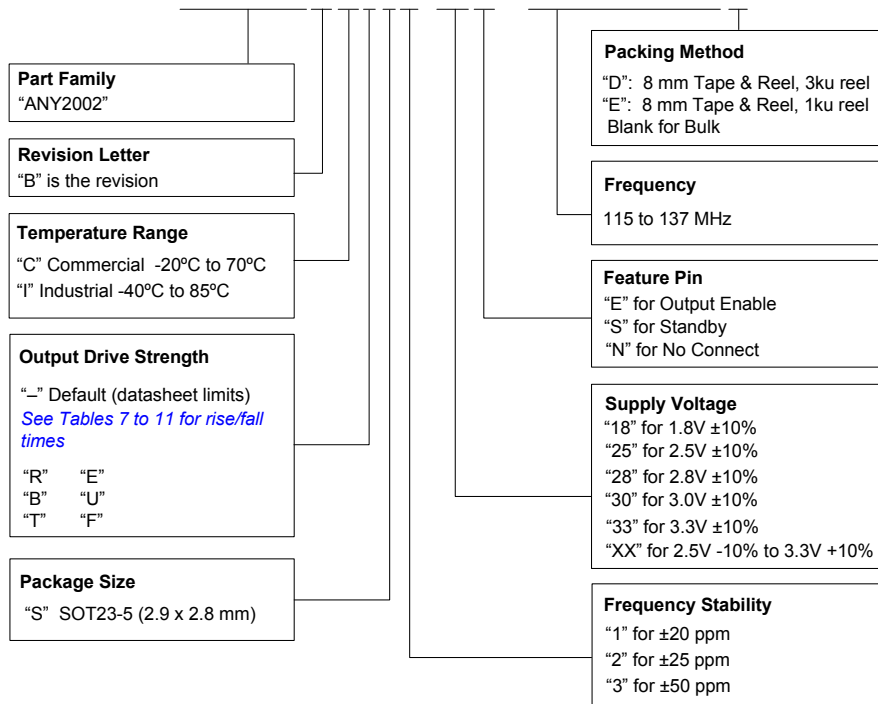


Table 14. Additional Information

| Document | Description | Download Link |
|---------------------------------------|--|--|
| Time Machine II | MEMS oscillator programmer | Mail to info@anyclk.com |
| Field Programmable Oscillators | Devices that can be programmable in the field by Time Machine II | Mail to info@anyclk.com |
| Manufacturing Notes | Tape & Reel dimension, reflow profile and other manufacturing related info | Mail to info@anyclk.com |
| Qualification Reports | RoHS report, reliability reports, composition reports | Mail to info@anyclk.com |
| Performance Reports | Additional performance data such as phase noise, current consumption and jitter for selected frequencies | Mail to info@anyclk.com |
| Termination Techniques | Termination design recommendations | Mail to info@anyclk.com |
| Layout Techniques | Layout recommendations | Mail to info@anyclk.com |

Revision History

Table 15. Datasheet Version and Change Log

| Version | Release Date | Change Summary |
|---------|--------------|---------------------------|
| 1.0 | 5/14/15 | Final Production Release. |