

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .


# SN74GTLPH1627

## 18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS

SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

- Member of the Texas Instruments Widebus™ Family
- TI-OPC™ Circuitry Limits Ringing on Unevenly Loaded Backplanes
- OEC™ Circuitry Improves Signal Integrity and Reduces Electromagnetic Interference
- Bidirectional Interface Between GTLP Signal Levels and LVTTTL Logic Levels
- GTLP Buffered SYCLK Signal (SSCLK) for Source-Synchronous Applications
- LVTTTL Interfaces Are 5-V Tolerant
- High-Drive GTLP Outputs (100 mA)
- LVTTTL Outputs (–24 mA/24 mA)
- GTLP Rise and Fall Times Designed for Optimal Data-Transfer Rate and Signal Integrity in Distributed Loads
- $I_{off}$ , Power-Up 3-State, and BIAS  $V_{CC}$  Support Live Insertion
- Bus Hold on A-Port Data Inputs
- Distributed  $V_{CC}$  and GND Pins Minimize High-Speed Switching Noise
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

description/ordering information

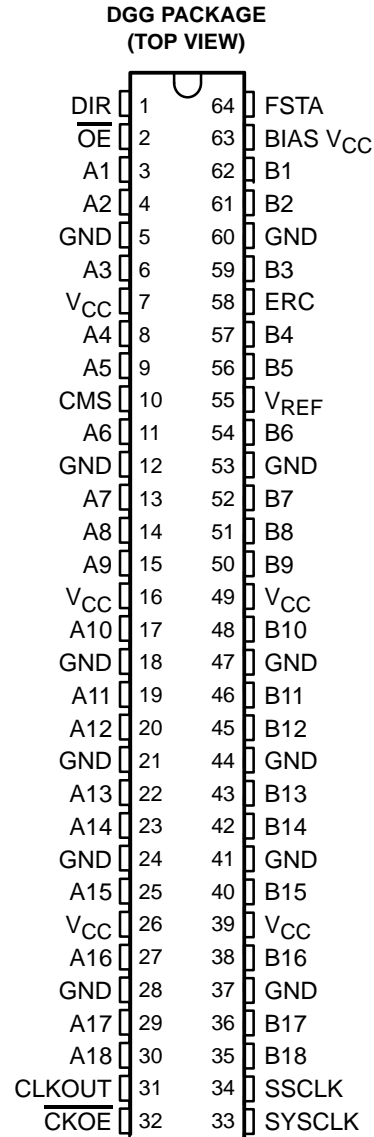

### ORDERING INFORMATION

T <sub>A</sub>	PACKAGE†	ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 85°C	TSSOP – DGG   Tape and reel	SN74GTLPH1627DGGR	GTLPH1627

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

OEC, TI-OPC, and Widebus are trademarks of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2003, Texas Instruments Incorporated

# SN74GTLPH1627

## 18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER

### WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS

SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

---

#### description (continued)

The SN74GTLPH1627 is a high-drive, 18-bit bus transceiver that provides LVTTTL-to-GTLP and GTLP-to-LVTTTL signal-level translation. The device allows for transparent and latched modes of data transfer. Additionally, with the use of the clock-mode select (CMS) input, the device can be used in source-synchronous and clock-synchronous applications. Source-synchronous applications require the skew between the clock output and data output to be minimized for optimum maximum-frequency system performance. In order to reduce this skew, a flexible setup time adjustment (FSTA) feature is incorporated into the device that sets a predetermined delay between the clock and data. The CMS and direction (DIR) inputs control the mode of the device. The system clock (SYSCLK) and CLKOUT pins are LVTTTL compatible, while the source synchronous I/O is GTLP compatible. The benefits include compensation for output-to-output skew coming from the driver itself, and compensation for process skew if more than one driver is used. The device provides a high-speed interface between cards operating at LVTTTL logic levels and a backplane operating at GTLP signal levels. High-speed (about three times faster than standard TTL or LVTTTL) backplane operation is a direct result of GTLP's reduced output swing ( $<1$  V), reduced input threshold levels, improved differential input, OEC™ circuitry, and TI-OPC™ circuitry. Improved GTLP OEC and TI-OPC circuits minimize bus-settling time and have been designed and tested using several backplane models. The high drive allows incident-wave switching in heavily loaded backplanes, with equivalent load impedance down to  $11 \Omega$ .

GTLP is the Texas Instruments derivative of the Gunning Transceiver Logic (GTL) JEDEC standard JESD 8-3. The ac specification for the SN74GTLPH1627 is given only at the preferred higher noise-margin GTLP, but the user has the flexibility of using this device at either GTL ( $V_{TT} = 1.2$  V and  $V_{REF} = 0.8$  V) or GTLP ( $V_{TT} = 1.5$  V and  $V_{REF} = 1$  V) signal levels. For information on using GTLP devices in FB+/BTL applications, refer to TI application reports, *Texas Instruments GTLP Frequently Asked Questions*, literature number SCEA019, and *GTLP in BTL Applications*, literature number SCEA017.

Normally, the B port operates at GTLP signal levels. The A-port and control inputs operate at LVTTTL logic levels, but are 5-V tolerant and are compatible with TTL and 5-V CMOS inputs.  $V_{REF}$  is the B-port differential input reference voltage.

This device is fully specified for live-insertion applications using  $I_{off}$ , power-up 3-state, and BIAS  $V_{CC}$ . The  $I_{off}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down. The power-up 3-state circuitry places the outputs in the high-impedance state during power up and power down, which prevents driver conflict. The BIAS  $V_{CC}$  circuitry precharges and preconditions the B-port input/output connections, preventing disturbance of active data on the backplane during card insertion or removal, and permits true live-insertion capability.

This GTLP device features TI-OPC circuitry, which actively limits the overshoot caused by improperly terminated backplanes, unevenly distributed cards, or empty slots during low-to-high signal transitions. This improves signal integrity, which allows adequate noise margin to be maintained at higher frequencies.

High-drive GTLP backplane interface devices feature adjustable edge-rate control (ERC). Changing the ERC input voltage between low and high adjusts the B-port output rise and fall times. This allows the designer to optimize system data-transfer rate and signal integrity to the backplane load.

Active bus-hold circuitry holds unused or undriven LVTTTL data inputs at a valid logic state. Use of pullup or pulldown resistors with the bus-hold circuitry is not recommended.

When  $V_{CC}$  is between 0 and 1.5 V, the device is in the high-impedance state during power up or power down. However, to ensure the high-impedance state above 1.5 V, the output-enable ( $\overline{OE}$ ) input should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**SN74GTLPH1627**  
**18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**

SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

**functional description**

The SN74GTLPH1627 is a high-drive (100 mA), 18-bit bus transceiver containing D-type latches and D-type flip-flops for data-path operation in transparent or latched modes and can replace any of the functions shown in Table 1. Data polarity is noninverting.

**Table 1. SN74GTLPH1627 Bus Transceiver Replacement Functions**

FUNCTION	8 BIT	9 BIT	10 BIT	16 BIT	18 BIT
Transceiver	'245, '623, '645	'863	'861	'16245, '16623	'16863
Buffer/driver	'241, '244, '541		'827	'16241, '16244, '16541	'16825
Latched transceiver	'543			'16543	'16472
Latch	'373, '573	'843	'841	'16373	'16843
SN74GTLPH1627 bus transceiver replaces all above functions.					

Additionally, the device allows for conversion of the system clock (SYSCLK) to GTLP signal levels (SSCLK) and LVTTTL signal levels (CLKOUT). It also provides conversion of a GTLP source-synchronous clock to LVTTTL signal levels (CLKOUT).


The device allows for conversion of the LVTTTL system clock (SYSCLK) to GTLP (SSCLK) and LVTTTL (CLKOUT) signal levels when used as the transmitter and GTLP source-synchronous clock (SSCLK) to LVTTTL (CLKOUT) signal levels when used as the receiver in source-synchronous applications. Source-synchronous operation removes time-of-flight restrictions and allows for increased data throughput. CMS is used to switch between system-synchronous mode and clock-synchronous mode. The clock output-enable ( $\overline{\text{CKOE}}$ ) input is used to switch between latched and transparent mode.

Data flow in each direction is controlled by  $\overline{\text{CKOE}}$ , clock (SYSCLK or SSCLK), direction (DIR), and  $\overline{\text{OE}}$ .  $\overline{\text{OE}}$  controls the 18 bits of data. The CLKOUT/SSCLK buffered clock path for the A-to-B and B-to-A directions is controlled by  $\overline{\text{CKOE}}$ . In the data isolation mode ( $\overline{\text{OE}}$  high,  $\overline{\text{CKOE}}$  low), A data may be stored in one register and/or B data may be stored in the other register.

**SN74GTLPH1627**  
**18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**

SCES356C – JUNE 2001 – REVISED FERUARY 2003

**logic diagram (positive logic)**

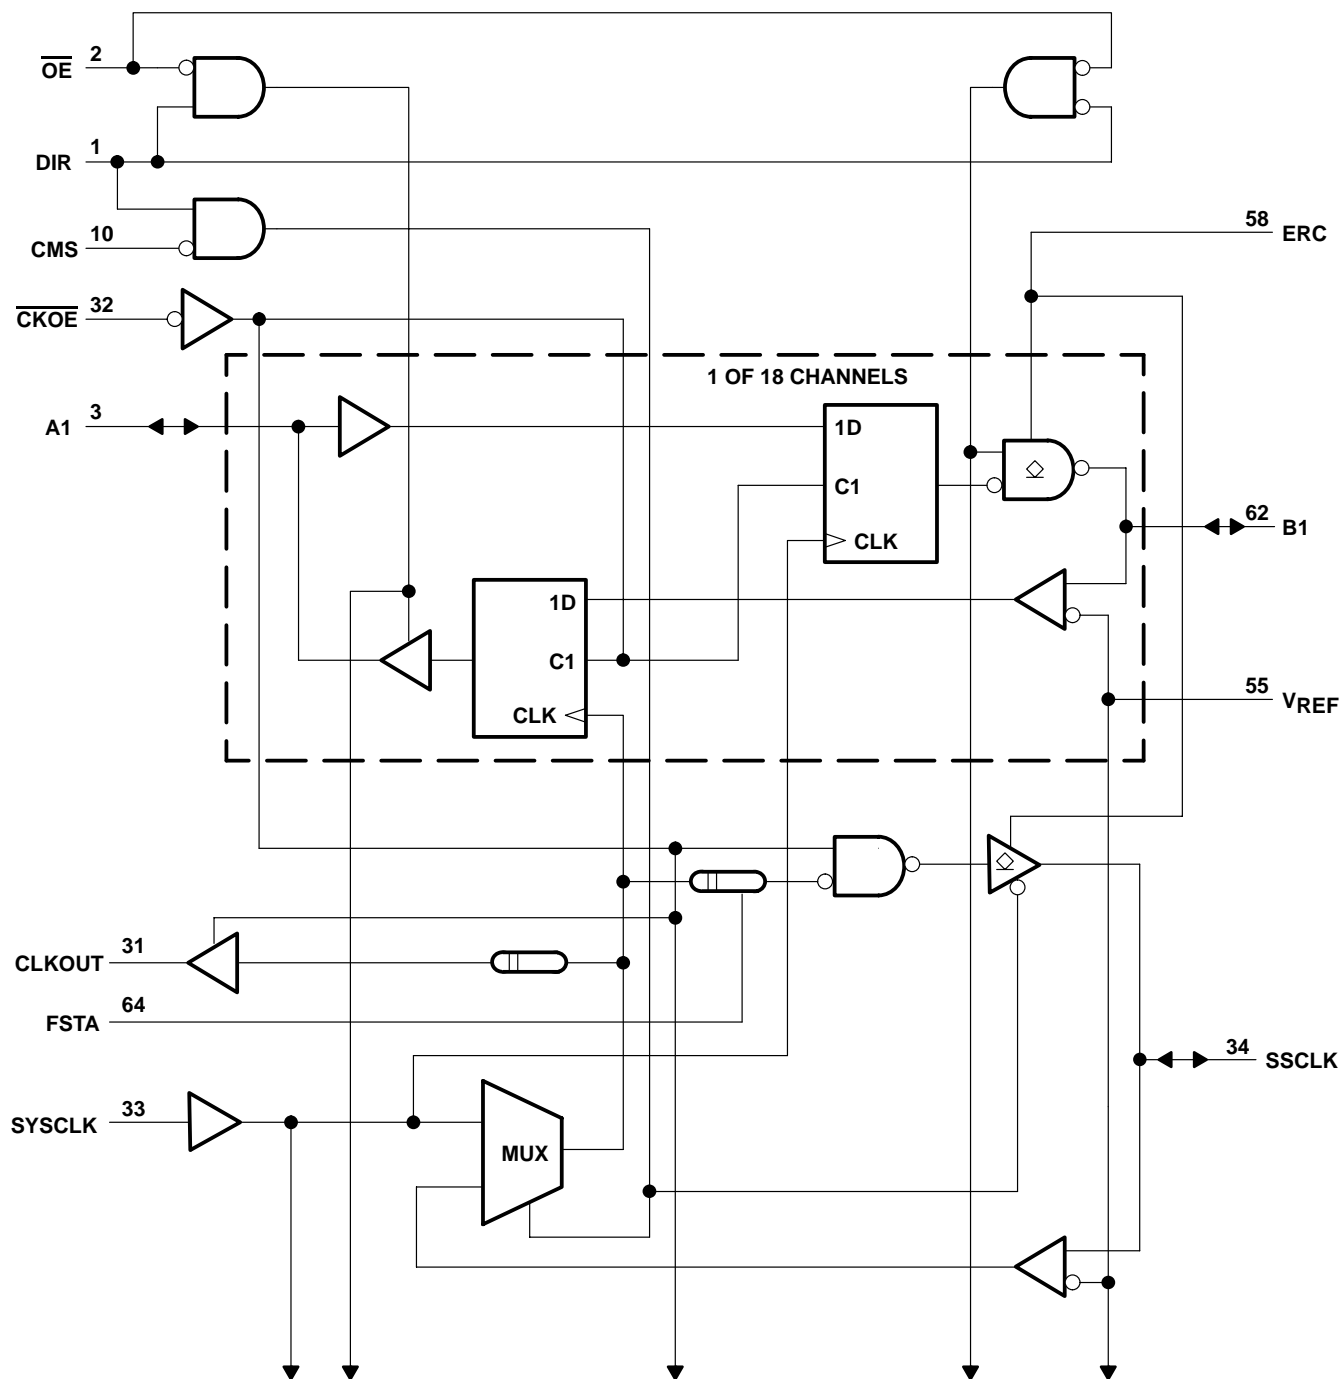

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**SN74GTLPH1627**  
**18-BIT LVTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**

SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

**Function Tables**

**A-TO-B DIRECTION**

INPUTS						OUTPUTS			MODE	
$\overline{CKOE}$	$\overline{OE}$	CMS	DIR	SYSCLK	A	SSCLK	CLKOUT	B		
L	L	X	L	H or L	X	SYSCLK	SYSCLK	B <sub>0</sub>	Latched storage of A	Source synchronous
L	L	X	L	↑	L	SYSCLK	SYSCLK	L	Clocked storage of A	
L	L	X	L	↑	H	SYSCLK	SYSCLK	H		
L	H	X	L	X	X	SYSCLK	SYSCLK	Z	Data isolation	
H	L	X	L	X	L	Z	Z	L	Transparent transmission of A	
H	L	X	L	X	H	Z	Z	H		
H	H	X	X	X	X	Z	Z	Z	Isolation	
L	H	H	X	↑	X	SYSCLK	SYSCLK	Z	Transmit SYSCLK	
L	H	H	X	H or L	X	SYSCLK	SYSCLK	Z		

**B-TO-A DIRECTION**

INPUTS							OUTPUTS			MODE	
$\overline{CKOE}$	$\overline{OE}$	CMS	DIR	SYSCLK	SSCLK	B	SSCLK	CLKOUT	A		
L	L	L	H	X	H or L	X	Input	SSCLK	A <sub>0</sub>	Latched storage of B	Source synchronous
L	L	L	H	X	↑	L	Input	SSCLK	L	Clocked storage of B	
L	L	L	H	X	↑	H	Input	SSCLK	H		
L	H	L	H	X	X	X	Input	SSCLK	Z	Data isolation	
L	L	H	H	H or L	Output	X	SYSCLK	SYSCLK	A <sub>0</sub>	Latched storage of B	Clock synchronous
L	L	H	H	↑	Output	L	SYSCLK	SYSCLK	L	Clocked storage of B	
L	L	H	H	↑	Output	H	SYSCLK	SYSCLK	H		
L	H	H	H	X	Output	X	SYSCLK	SYSCLK	Z	Data isolation	
H	L	X	H	X	Output	L	Z	Z	L	Transparent transmission of B	
H	L	X	H	X	Output	H	Z	Z	H		
H	H	X	X	X	Output	X	Z	Z	Z	Isolation	
L	H	L	X	X	↑	X	Input	SSCLK	Z	Receive SSCLK	
L	H	L	X	X	H or L	X	Input	SSCLK	Z		

**OUTPUT EDGE-RATE CONTROL (ERC)**

INPUT ERC	OUTPUT B-PORT EDGE RATE
H	Slow
L	Fast



**SN74GTLP1627**  
**18-BIT LVTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**

SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

**recommended operating conditions (see Notes 4 through 7)**

		MIN	NOM	MAX	UNIT	
$V_{CC}$ , BIAS $V_{CC}$	Supply voltage	3.15	3.3	3.45	V	
$V_{TT}$	Termination voltage	GTL	1.14	1.2	1.26	V
		GTLP	1.35	1.5	1.65	
$V_{REF}$	Reference voltage	GTL	0.74	0.8	0.87	V
		GTLP	0.87	1	1.1	
$V_I$	Input voltage	B port and SSCLK	$V_{TT}$		V	
		Except B port and SSCLK	$V_{CC}$ 5.5			
$V_{IH}$	High-level input voltage	B port and SSCLK	$V_{REF}+0.05$		V	
		Except B port and SSCLK	2			
$V_{IL}$	Low-level input voltage	B port and SSCLK	$V_{REF}-0.05$		V	
		Except B port and SSCLK	0.8			
$I_{IK}$	Input clamp current				-18	mA
$I_{OH}$	High-level output current	A port and CLKOUT		-24	mA	
$I_{OL}$	Low-level output current	A port and CLKOUT		24	mA	
		B port and SSCLK		100		
$\Delta t/\Delta v$	Input transition rise or fall rate	Outputs enabled			10	ns/V
$\Delta t/\Delta V_{CC}$	Power-up ramp rate	20				$\mu$ s/V
$T_A$	Operating free-air temperature	-40			85	$^{\circ}$ C

- NOTES:
- All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.
  - Proper connection sequence for use of the B-port I/O precharge feature is GND and BIAS  $V_{CC} = 3.3$  V first, I/O second, and  $V_{CC} = 3.3$  V last, because the BIAS  $V_{CC}$  precharge circuitry is disabled when any  $V_{CC}$  pin is connected. The control and  $V_{REF}$  inputs can be connected anytime, but normally are connected during the I/O stage. If B-port precharge is not required, any connection sequence is acceptable, but generally, GND is connected first.
  - $V_{TT}$  and  $R_{TT}$  can be adjusted to accommodate backplane impedances if the dc recommended  $I_{OL}$  ratings are not exceeded.
  - $V_{REF}$  can be adjusted to optimize noise margins, but normally is two-thirds  $V_{TT}$ . TI-OPC circuitry is enabled in the A-to-B direction and is activated when  $V_{TT} > 0.7$  V above  $V_{REF}$ . If operated in the A-to-B direction,  $V_{REF}$  should be set to within 0.6 V of  $V_{TT}$  to minimize current drain.





# SN74GTLPH1627

## 18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER

### WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS

SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

**electrical characteristics over recommended operating free-air temperature range for GTLP (unless otherwise noted)**

PARAMETER		TEST CONDITIONS		MIN	TYP†	MAX	UNIT
V <sub>IK</sub>		V <sub>CC</sub> = 3.15 V,	I <sub>I</sub> = -18 mA			-1.2	V
V <sub>OH</sub>	A port and CLKOUT	V <sub>CC</sub> = 3.15 V to 3.45 V,	I <sub>OH</sub> = -100 μA	V <sub>CC</sub> -0.2			V
		V <sub>CC</sub> = 3.15 V	I <sub>OH</sub> = -12 mA	2.4			
			I <sub>OH</sub> = -24 mA	2			
V <sub>OL</sub>	A port and CLKOUT	V <sub>CC</sub> = 3.15 V to 3.45 V,	I <sub>OL</sub> = 100 μA			0.2	V
		V <sub>CC</sub> = 3.15 V	I <sub>OL</sub> = 12 mA			0.4	
			I <sub>OL</sub> = 24 mA			0.5	
	B port and SSCLK	V <sub>CC</sub> = 3.15 V to 3.45 V,	I <sub>OL</sub> = 100 μA			0.2	
			I <sub>OL</sub> = 10 mA			0.2	
		V <sub>CC</sub> = 3.15 V	I <sub>OL</sub> = 64 mA			0.4	
		I <sub>OL</sub> = 100 mA			0.55		
I <sub>I</sub>	SYSCLOCK and control inputs	V <sub>CC</sub> = 3.45 V,	V <sub>I</sub> = 0 to 5.5 V			±10	μA
I <sub>OZ</sub> ‡	B port and SSCLK	V <sub>CC</sub> = 3.45 V, V <sub>REF</sub> within 0.6 V of V <sub>TT</sub> ,	V <sub>O</sub> = 0 to 2.3 V			±10	μA
	CLKOUT	V <sub>CC</sub> = 3.45 V,	V <sub>O</sub> = 0 to 5.5 V			±10	
I <sub>OZH</sub> ‡	A port	V <sub>CC</sub> = 3.45 V,	V <sub>O</sub> = V <sub>CC</sub>			10	μA
I <sub>OZL</sub> ‡	A port	V <sub>CC</sub> = 3.45 V,	V <sub>O</sub> = GND			-10	μA
I <sub>BHL</sub> §	A port	V <sub>CC</sub> = 3.15 V,	V <sub>I</sub> = 0.8 V	75			μA
I <sub>BHH</sub> ¶	A port	V <sub>CC</sub> = 3.15 V,	V <sub>I</sub> = 2 V	-75			μA
I <sub>BHLO</sub> #	A port	V <sub>CC</sub> = 3.45 V,	V <sub>I</sub> = 0 to V <sub>CC</sub>	500			μA
I <sub>BHHO</sub>	A port	V <sub>CC</sub> = 3.45 V,	V <sub>I</sub> = 0 to V <sub>CC</sub>	-500			μA
I <sub>CC</sub>	A port, B port, or SSCLK	V <sub>CC</sub> = 3.45 V, I <sub>O</sub> = 0, V <sub>I</sub> (A-port or control input) = V <sub>CC</sub> or GND, V <sub>I</sub> (B port) = V <sub>TT</sub> or GND	Outputs high			50	mA
			Outputs low			50	
			Outputs disabled			50	
ΔI <sub>CC</sub> *		V <sub>CC</sub> = 3.45 V, One A-port or control input at V <sub>CC</sub> - 0.6 V, Other A-port or control inputs at V <sub>CC</sub> or GND				1.5	mA
C <sub>i</sub>	SYSCLOCK inputs	V <sub>I</sub> = 3.15 V or 0			4	5	pF
	Control inputs	V <sub>I</sub> = 3.15 V or 0			3.5	5.5	
C <sub>io</sub>	A port	V <sub>O</sub> = 3.15 V or 0			7.5	9.5	pF
	B port or SSCLK	V <sub>O</sub> = 1.5 V or 0			9.5	12	
C <sub>o</sub>	CLKOUT	V <sub>O</sub> = 3.15 V or 0			6	7.5	pF

† All typical values are at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C.

‡ For I/O ports, the parameter I<sub>I</sub> includes the off-state output leakage current.

§ The bus-hold circuit can sink at least the minimum low sustaining current at V<sub>IL</sub>max. I<sub>BHL</sub> should be measured after lowering V<sub>IN</sub> to GND and then raising it to V<sub>IL</sub>max.

¶ The bus-hold circuit can source at least the minimum high sustaining current at V<sub>IH</sub>min. I<sub>BHH</sub> should be measured after raising V<sub>IN</sub> to V<sub>CC</sub> and then lowering it to V<sub>IH</sub>min.

# An external driver must source at least I<sub>BHLO</sub> to switch this node from low to high.

|| An external driver must sink at least I<sub>BHHO</sub> to switch this node from high to low.

\* This is the increase in supply current for each input that is at the specified TTL voltage level, rather than V<sub>CC</sub> or GND.



**SN74GTLP1627**  
**18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**

SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

**hot-insertion specifications for A port over recommended operating free-air temperature range**

PARAMETER	TEST CONDITIONS			MIN	MAX	UNIT
$I_{off}$	$V_{CC} = 0,$	BIAS $V_{CC} = 0,$	$V_I$ or $V_O = 0$ to 5.5 V		10	$\mu A$
$I_{OZPU}$	$V_{CC} = 0$ to 1.5 V,	$V_O = 0.5$ V to 3 V,	$\overline{OE} = 0$		$\pm 30$	$\mu A$
$I_{OZPD}$	$V_{CC} = 1.5$ V to 0,	$V_O = 0.5$ V to 3 V,	$\overline{OE} = 0$		$\pm 30$	$\mu A$

**live-insertion specifications for B port over recommended operating free-air temperature range**

PARAMETER	TEST CONDITIONS			MIN	MAX	UNIT
$I_{off}$	$V_{CC} = 0,$	BIAS $V_{CC} = 0,$	$V_I$ or $V_O = 0$ to 1.5 V		10	$\mu A$
$I_{OZPU}$	$V_{CC} = 0$ to 1.5 V,	BIAS $V_{CC} = 0,$	$V_O = 0.5$ V to 1.5 V, $\overline{OE} = 0$		$\pm 30$	$\mu A$
$I_{OZPD}$	$V_{CC} = 1.5$ V to 0,	BIAS $V_{CC} = 0,$	$V_O = 0.5$ V to 1.5 V, $\overline{OE} = 0$		$\pm 30$	$\mu A$
$I_{CC}$ (BIAS $V_{CC}$ )	$V_{CC} = 0$ to 3.15 V	BIAS $V_{CC} = 3.15$ V to 3.45 V,	$V_O$ (B port) = 0 to 1.5 V		5	mA
	$V_{CC} = 3.15$ V to 3.45 V				10	$\mu A$
$V_O$	$V_{CC} = 0,$	BIAS $V_{CC} = 3.3$ V,	$I_O = 0$	0.95	1.05	V
$I_O$	$V_{CC} = 0,$	BIAS $V_{CC} = 3.15$ V to 3.45 V,	$V_O$ (B port) = 0.6 V	-1		$\mu A$

**timing requirements over recommended ranges of supply voltage and operating free-air temperature,  $V_{TT} = 1.5$  V and  $V_{REF} = 1$  V for GTLP (unless otherwise noted)**

			MIN	MAX	UNIT
$f_{clock}$	Clock frequency			175	MHz
$t_w$	Pulse duration	SYSCLK (A to B) or (B to A) high or low	2.5		ns
		SYSCLK to CLKOUT high or low	2.8		
		SYSCLK to SSCLK (FSTA GND) high or low	2.8		
		SYSCLK to SSCLK (FSTA $V_{CC}$ ) high or low	2.3		
		SSCLK (B to A) high or low	2.8		
		SSCLK to CLKOUT high or low	2.8		
		$\overline{CKOE}$ (A to B) or (B to A) high	2.5		
$t_{su}$	Setup time	A before SYSCLK $\uparrow$	1.1		ns
		B before SYSCLK $\uparrow$	2.2		
		B before SSCLK $\uparrow$	1.6		
		A before $\overline{CKOE}$ $\downarrow$	1.4		
		B before $\overline{CKOE}$ $\downarrow$	0.8		
$t_h$	Hold time	A after SYSCLK $\uparrow$	0.3		ns
		B after SYSCLK $\uparrow$	0.7		
		B after SSCLK $\uparrow$	1.1		
		A after $\overline{CKOE}$ $\downarrow$	0		
		B after $\overline{CKOE}$ $\downarrow$	0.7		



**SN74GTLPH1627**  
**18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**

SCES356C – JUNE 2001 – REVISED FERUARY 2003

switching characteristics over recommended ranges of supply voltage and operating free-air temperature,  $V_{TT} = 1.5\text{ V}$  and  $V_{REF} = 1\text{ V}$  for GTLP (see Figure 1)

PARAMETER	CLOCK	FROM (INPUT)	TO (OUTPUT)	EDGE RATE†	FSTA	MIN	TYP‡	MAX	UNIT
$f_{max}$	SYSCLK	A or B	B or A	–	–	175			MHz
		SYSCLK	CLKOUT	–	–	175			
		SYSCLK	SSCLK	–	GND	175			
		SYSCLK	SSCLK	–	$V_{CC}$	150			
	SSCLK	B	A	–	–	175			
		SSCLK	CLKOUT	–	–	175			
$t_{pd}$	–	A	B	Fast	–	2.3		6.2	ns
	–			Slow	–	3	7.3		
	–	$\overline{CKOE}$	B	Fast	–	2.6		6	
	–			Slow	–	3.1	7.6		
	–	SYSCLK	B	Fast	–	2.6		6	
	–			Slow	–	3	7.1		
$t_{en}$	–	OE	B	Fast	–	2.3		5.1	ns
$t_{dis}$						2.7		5.5	
$t_{en}$	–	$\overline{OE}$	B	Slow	–	2.9		6	ns
$t_{dis}$						3.6		6.6	
$t_r$	–	Rise time, B and SSCLK outputs (20% to 80%)		Fast	–	1.1		ns	
				Slow		2.1			
$t_f$	–	Fall time, B and SSCLK outputs (80% to 20%)		Fast	–	1.8		ns	
				Slow		2.4			
$t_{pd}$	–	B	A	–	–	1.5		4.6	ns
	–	$\overline{CKOE}$	A	–	–	2.1		6	
	–	SYSCLK	A	–	–	1.9		6	
	–	SSCLK	A	–	–	2.3		6.6	
	–	SYSCLK	CLKOUT	–	–	3.3		8.3	
	–	SSCLK	CLKOUT	–	–	3.7		9	
$t_{en}$	–	$\overline{OE}$	A	–	–	1.6		5	ns
$t_{dis}$						2.1		6.4	
$t_{en}$	–	$\overline{CKOE}$	CLKOUT	–	–	2		5.2	ns
$t_{dis}$						2.4		6.1	

† Slow (ERC = H) and Fast (ERC = L)

‡ All typical values are at  $V_{CC} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .



**SN74GTLPH1627**  
**18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**

SCE356C – JUNE 2001 – REVISED FEBRUARY 2003

skew characteristics over recommended ranges of supply voltage and operating free-air temperature,  $V_{REF} = 1\text{ V}$  (unless otherwise noted); standard lumped loads,  $C_L = 30\text{ pF}$  for B port (see Figure 1)<sup>†</sup>

PARAMETER	FROM (INPUT)	TO (OUTPUT)	EDGE RATE <sup>‡</sup>	FSTA	TEST CONDITIONS	MIN	MAX	UNIT
$t_{sk(LH)}^{\S}$	SYSCLK	B	Fast	–		0.5		ns
$t_{sk(HL)}^{\S}$						0.5		
$t_{sk(LH)}^{\S}$	SYSCLK	B	Slow	–		0.5		ns
$t_{sk(HL)}^{\S}$						0.5		
$t_{sk(LH)}^{\S}$	SYSCLK	SSCLK + $\Delta B$ (see Figure 2)	Fast	GND	$V_{CC} = 3.15\text{ V}, T = 85^{\circ}\text{C}$	3.2	4.6	ns
					$V_{CC} = 3.3\text{ V}, T = 25^{\circ}\text{C}$	2.9	4.3	
					$V_{CC} = 3.45\text{ V}, T = -40^{\circ}\text{C}$	2.8	4.1	
$t_{sk(HL)}^{\S}$	SYSCLK	SSCLK + $\Delta B$ (see Figure 2)	Fast	GND	$V_{CC} = 3.15\text{ V}, T = 85^{\circ}\text{C}$	3.6	5	ns
					$V_{CC} = 3.3\text{ V}, T = 25^{\circ}\text{C}$	3.4	4.8	
					$V_{CC} = 3.45\text{ V}, T = -40^{\circ}\text{C}$	3.3	4.6	
$t_{sk(LH)}^{\S}$	SYSCLK	SSCLK + $\Delta B$ (see Figure 2)	Slow	GND	$V_{CC} = 3.15\text{ V}, T = 85^{\circ}\text{C}$	3	4.6	ns
					$V_{CC} = 3.3\text{ V}, T = 25^{\circ}\text{C}$	2.6	4.3	
					$V_{CC} = 3.45\text{ V}, T = -40^{\circ}\text{C}$	2.4	4	
$t_{sk(HL)}^{\S}$	SYSCLK	SSCLK + $\Delta B$ (see Figure 2)	Slow	GND	$V_{CC} = 3.15\text{ V}, T = 85^{\circ}\text{C}$	3.7	5.2	ns
					$V_{CC} = 3.3\text{ V}, T = 25^{\circ}\text{C}$	3.6	5.1	
					$V_{CC} = 3.45\text{ V}, T = -40^{\circ}\text{C}$	3.5	5	
$t_{sk(LH)}^{\S}$	SYSCLK	SSCLK + $\Delta B$ (see Figure 2)	Fast	$V_{CC}$	$V_{CC} = 3.15\text{ V}, T = 85^{\circ}\text{C}$	6.5	8.3	ns
					$V_{CC} = 3.3\text{ V}, T = 25^{\circ}\text{C}$	6.3	8.2	
					$V_{CC} = 3.45\text{ V}, T = -40^{\circ}\text{C}$	5.6	7.4	
$t_{sk(HL)}^{\S}$	SYSCLK	SSCLK + $\Delta B$ (see Figure 2)	Fast	$V_{CC}$	$V_{CC} = 3.15\text{ V}, T = 85^{\circ}\text{C}$	7	8.7	ns
					$V_{CC} = 3.3\text{ V}, T = 25^{\circ}\text{C}$	6.5	8.3	
					$V_{CC} = 3.45\text{ V}, T = -40^{\circ}\text{C}$	6.2	8	
$t_{sk(LH)}^{\S}$	SYSCLK	SSCLK + $\Delta B$ (see Figure 2)	Slow	$V_{CC}$	$V_{CC} = 3.15\text{ V}, T = 85^{\circ}\text{C}$	6.4	8.3	ns
					$V_{CC} = 3.3\text{ V}, T = 25^{\circ}\text{C}$	5.9	7.7	
					$V_{CC} = 3.45\text{ V}, T = -40^{\circ}\text{C}$	5.5	7.4	
$t_{sk(HL)}^{\S}$	SYSCLK	SSCLK + $\Delta B$ (see Figure 2)	Slow	$V_{CC}$	$V_{CC} = 3.15\text{ V}, T = 85^{\circ}\text{C}$	7.2	8.9	ns
					$V_{CC} = 3.3\text{ V}, T = 25^{\circ}\text{C}$	6.8	8.6	
					$V_{CC} = 3.45\text{ V}, T = -40^{\circ}\text{C}$	6.6	8.3	
$t_{sk(t)}^{\S}$	SYSCLK	B	Fast	–	1.4		ns	
			Slow	–	2			
$t_{sk(prLH)}^{\parallel}$	SYSCLK	B	–	–	1.8		ns	
$t_{sk(prHL)}^{\parallel}$					2.8			

<sup>†</sup> Actual skew values between the GTLP outputs could vary on the backplane due to the loading and impedance seen by the device.

<sup>‡</sup> Slow (ERC = H) and Fast (ERC = L)


<sup>§</sup>  $t_{sk(LH)}/t_{sk(HL)}$  and  $t_{sk(t)}$  – Output-to-output skew is defined as the absolute value of the difference between the actual propagation delay for all outputs with the same packaged device. The specifications are given for specific worst-case  $V_{CC}$  and temperature. The specifications apply to any outputs switching in the same direction, either high to low [ $t_{sk(HL)}$ ], low to high [ $t_{sk(LH)}$ ] or in opposite directions, both low to high and high to low [ $t_{sk(t)}$ ].

<sup>¶</sup>  $t_{sk(prLH)}$  or  $t_{sk(prHL)}$  – Part-to-part skew is designed as the absolute value of the difference between the actual propagation delay for all outputs from device to device. The parameter is specified for a specific worst-case  $V_{CC}$  and temperature. Furthermore, these values are provided by SPICE simulations.

**SN74GTLPH1627**  
**18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**


SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

**PARAMETER MEASUREMENT INFORMATION**

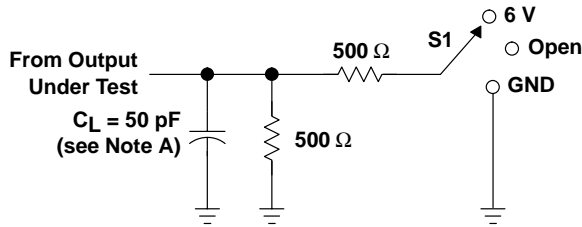


**LOAD CIRCUIT FOR A OUTPUTS**


TEST	S1
$t_{PLH}/t_{PHL}$	Open
$t_{PLZ}/t_{PZL}$	6 V
$t_{PHZ}/t_{PZH}$	GND




**LOAD CIRCUIT FOR B OUTPUTS**

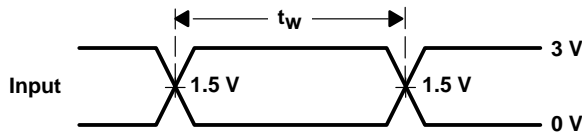


**VOLTAGE WAVEFORMS PULSE DURATION**

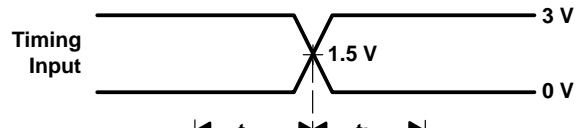


**VOLTAGE WAVEFORMS SETUP AND HOLD TIMES**  
 $(V_M = 1.5\text{ V for A port and } 1\text{ V for B port})$   
 $(V_{OH} = 3\text{ V for A port and } 1.5\text{ V for B port})$

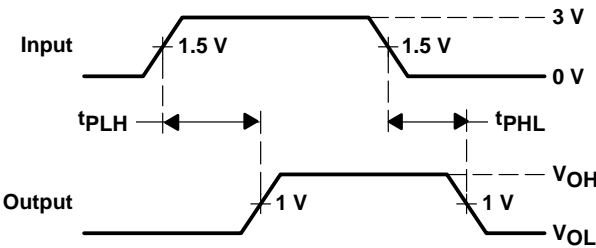

**VOLTAGE WAVEFORMS PROPAGATION DELAY TIMES (A port to B port)**

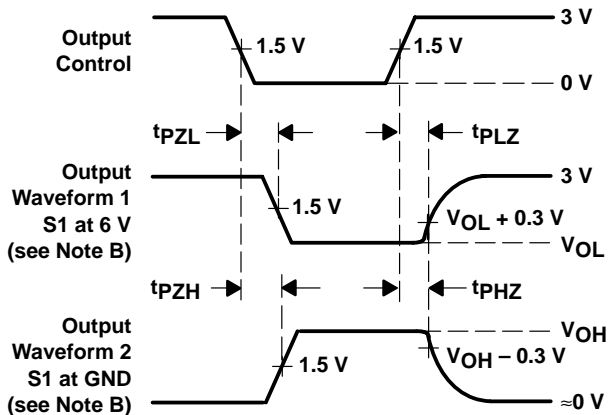

**VOLTAGE WAVEFORMS ENABLE AND DISABLE TIMES (A port)**

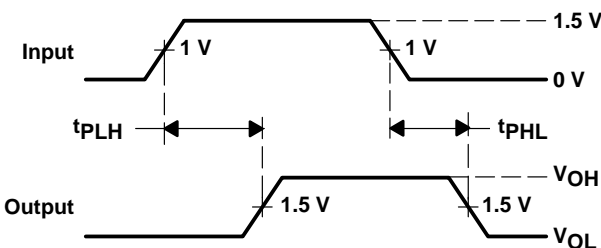



**VOLTAGE WAVEFORMS PROPAGATION DELAY TIMES (B port to A port)**

- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.  
 C. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10\text{ MHz}$ ,  $Z_O = 50\ \Omega$ ,  $t_r \leq 2\text{ ns}$ ,  $t_f \leq 2\text{ ns}$ .  
 D. The outputs are measured one at a time with one transition per measurement.  
 E. Load circuit for A outputs also is used for CLKOUT; load circuit for B outputs also is used for SSCLK.

**Figure 1. Load Circuits and Voltage Waveforms**

**SN74GTLPH1627**  
**18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**

SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

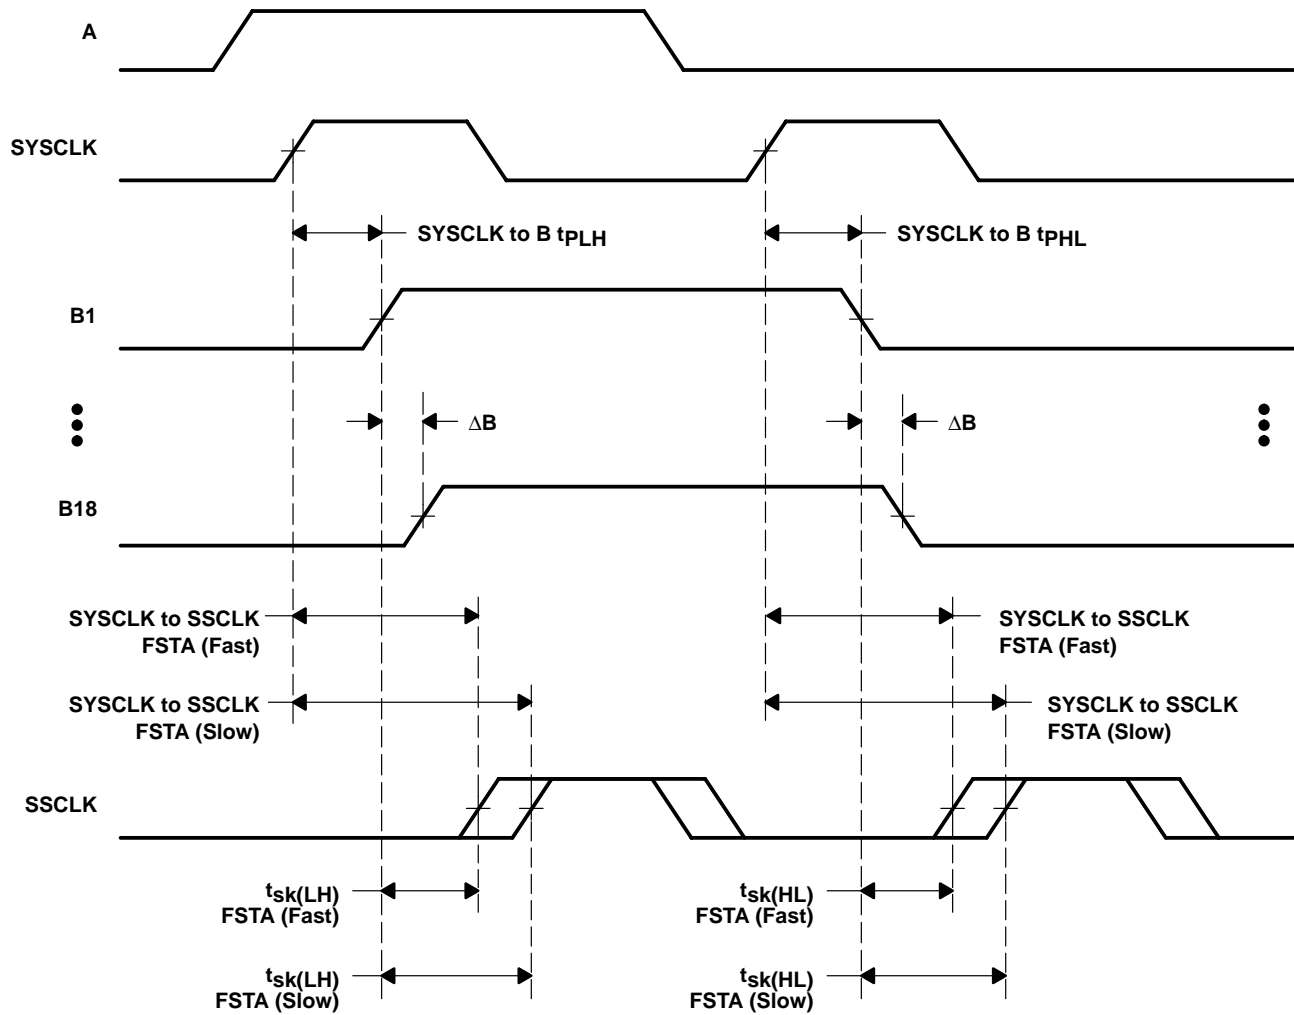

- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ ,  $t_r \leq 2$  ns,  $t_f \leq 2$  ns.  
 C. The outputs are measured one at a time with one transition per measurement.  
 D. Load circuit for B outputs also is used for SSCLK.

**Figure 2. Load Circuit and SYSCLK to SSCLK +  $\Delta B$  Skew Waveforms**

**SN74GTLPH1627**  
**18-BIT LVTTTL-TO-GTLP BUS TRANSCEIVER**  
**WITH SOURCE SYNCHRONOUS CLOCK OUTPUTS**

SCES356C – JUNE 2001 – REVISED FEBRUARY 2003

**DISTRIBUTED-LOAD BACKPLANE SWITCHING CHARACTERISTICS**

The preceding switching characteristics table shows the switching characteristics of the device into a lumped load (Figure 1). However, the designer's backplane application is probably a distributed load. The physical representation is shown in Figure 3. This backplane, or distributed load, can be closely approximated to a resistor inductance capacitance (RLC) circuit, as shown in Figure 4. This device has been designed for optimum performance in this RLC circuit. The following switching characteristics table shows the switching characteristics of the device into the RLC load, to help the designer to better understand the performance of the GTLP device in this typical backplane. See [www.ti.com/sc/gtlp](http://www.ti.com/sc/gtlp) for more information.

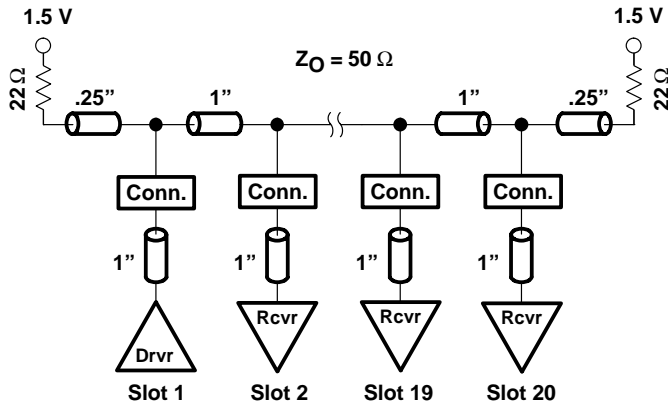


Figure 3. High-Drive Test Backplane

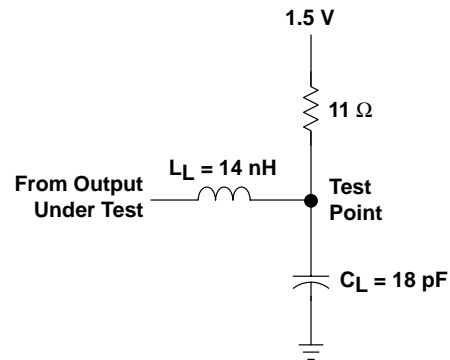


Figure 4. High-Drive RLC Network

switching characteristics over recommended operating conditions for the bus transceiver function (unless otherwise noted) (see Figure 4)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	EDGE RATE†	FSTA	TYP‡	UNIT
t <sub>PLH</sub>	A	B	Fast	–	4.8	ns
t <sub>PHL</sub>					4.2	
t <sub>PLH</sub>			Slow		5.6	
t <sub>PHL</sub>					5.2	
t <sub>PLH</sub>	SYSCLK	B	Fast	–	4.9	ns
t <sub>PHL</sub>					4.5	
t <sub>PLH</sub>			Slow		5.5	
t <sub>PHL</sub>					5.2	
t <sub>r</sub>	Rise time, B and SSCLK outputs (20% to 80%)		Fast	–	0.9	ns
			Slow	–	1.3	
t <sub>f</sub>	Fall time, B and SSCLK outputs (80% to 20%)		Fast	–	2.3	ns
			Slow	–	2.7	

† Slow (ERC = H) and Fast (ERC = L)

‡ All typical values are at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C. All values are derived from TI-SPICE models.

DGG (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

48 PINS SHOWN



- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-153



## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

### Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265