

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# CLH1005T Series Specification

**1** Scope: This specification applies to Multilayer ceramic chip inductors

**2** Part Numbering: Product Identification

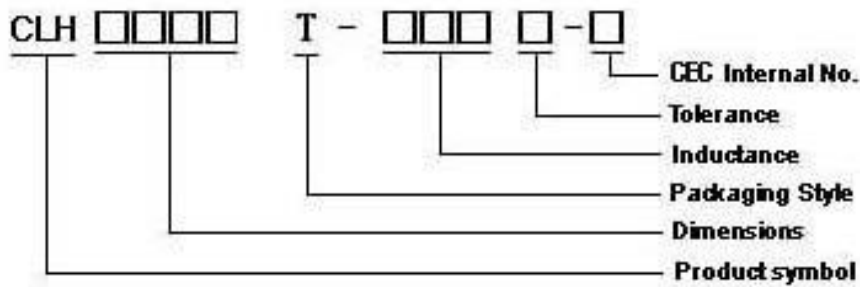


**3** Rating:

Operating Temperature: - 5 5      1 2 5

Storage Temperature: Under 2 5 , Humidity 40% 65%

**4** Marking:

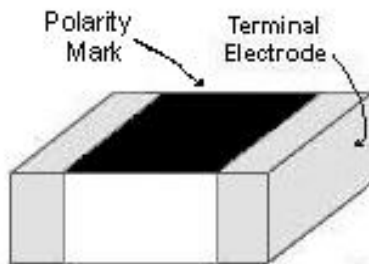


**5** Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35 )	20±2
Humidity	Ordinary Humidity(25 to 85% RH)	60 to 70 % RH

# CLH1005T Series Specification

## 6 Configuration and Dimensions:



Dimensions in mm

TYPE	CLH1005
A	1.00±0.10
B	0.50±0.10
C	0.50±0.10
D	0.25±0.10

## 7 ELECTRICAL CHARACTERISTICS :

Part No.		Inductance (nH)	L,Q Test Freq. (MHZ)	Q Min.	SRF (MHZ)Typ.	RDC ( )Max.	IDC (mA)Max.	Tolerance
CLH1005T-0N2	-S	0.2	100 MHz,200 mV	8	10000	0.1	400	S
CLH1005T-0N3	-S	0.3	100 MHz,200 mV	8	10000	0.1	400	S
CLH1005T-0N4	-S	0.4	100 MHz,200 mV	8	10000	0.1	400	S
CLH1005T-0N5	-S	0.5	100 MHz,200 mV	8	10000	0.1	400	S
CLH1005T-0N6	-S	0.6	100 MHz,200 mV	8	10000	0.1	400	S
CLH1005T-0N7	-S	0.7	100 MHz,200 mV	8	10000	0.1	400	S
CLH1005T-0N8	-S	0.8	100 MHz,200 mV	8	10000	0.1	400	S
CLH1005T-1N0	-S	1	100 MHz,200 mV	8	10000	0.1	400	S
CLH1005T-1N2	-S	1.2	100 MHz,200 mV	8	10000	0.1	400	S
CLH1005T-1N3	-S	1.3	100 MHz,200 mV	8	9000	0.1	400	S
CLH1005T-1N5	-S	1.5	100 MHz,200 mV	8	9000	0.1	400	S
CLH1005T-1N8	-S	1.8	100 MHz,200 mV	8	8700	0.1	400	S
CLH1005T-2N0	-S	2	100 MHz,200 mV	8	8100	0.15	400	S
CLH1005T-2N2	-S	2.2	100 MHz,200 mV	8	8100	0.15	400	S
CLH1005T-2N4	-S	2.4	100 MHz,200 mV	8	7700	0.15	400	S
CLH1005T-2N7	-S	2.7	100 MHz,200 mV	8	7700	0.15	400	S
CLH1005T-3N0	-S	3	100 MHz,200 mV	8	6300	0.15	400	S
CLH1005T-3N3	-S	3.3	100 MHz,200 mV	8	6300	0.15	400	S,K
CLH1005T-3N6	-S	3.6	100 MHz,200 mV	8	6100	0.15	400	S,K
CLH1005T-3N9	-S	3.9	100 MHz,200 mV	8	6100	0.2	400	S,K
CLH1005T-4N3	-S	4.3	100 MHz,200 mV	8	5400	0.2	400	S,K
CLH1005T-4N7	-S	4.7	100 MHz,200 mV	8	5400	0.2	400	S,K
CLH1005T-5N0	-S	5	100 MHz,200 mV	8	5100	0.2	400	S,K
CLH1005T-5N1	-S	5.1	100 MHz,200 mV	8	5100	0.2	400	S,K
CLH1005T-5N6	-S	5.6	100 MHz,200 mV	8	5100	0.2	400	S,K

**NOTE:** -tolerance J=±5% / K=±10% / S=±0.3nH

1.Operating temperature range - 5 5 1 2 5

2.IDC:Applied the current to coils, the inductance shall be less than 10% initial value.



QS9000 & ISO14001 & TS16949 CHILISIN ELECTRONICS CORP.


## CLH1005T Series Specification

Part No.		Inductance (nH)	L,Q Test Freq. (MHZ)	Q Min.	SRF (MHZ)Typ.	RDC ( )Max.	IDC (mA)Max.	Tolerance
CLH1005T-6N0	-S	6	100 MHz,200 mV	8	4550	0.25	400	S,K
CLH1005T-6N2	-S	6.2	100 MHz,200 mV	8	4550	0.25	400	J,K
CLH1005T-6N8	-S	6.8	100 MHz,200 mV	8	4550	0.25	400	J,K
CLH1005T-7N5	-S	7.5	100 MHz,200 mV	8	4300	0.25	400	J,K
CLH1005T-8N0	-S	8	100 MHz,200 mV	8	4100	0.3	300	J,K
CLH1005T-8N2	-S	8.2	100 MHz,200 mV	8	4100	0.3	300	J,K
CLH1005T-9N1	-S	9.1	100 MHz,200 mV	8	3900	0.35	300	J,K
CLH1005T-10N	-S	10	100 MHz,200 mV	8	3900	0.35	300	J,K
CLH1005T-12N	-S	12	100 MHz,200 mV	8	3000	0.4	300	J,K
CLH1005T-15N	-S	15	100 MHz,200 mV	8	2600	0.5	300	J,K
CLH1005T-18N	-S	18	100 MHz,200 mV	8	2350	0.55	300	J,K
CLH1005T-22N	-S	22	100 MHz,200 mV	8	2000	0.7	300	J,K
CLH1005T-27N	-S	27	100 MHz,200 mV	8	1900	0.8	300	J,K
CLH1005T-33N	-S	33	100 MHz,200 mV	8	1700	1	200	J,K
CLH1005T-39N	-S	39	100 MHz,200 mV	8	1600	1.2	150	J,K
CLH1005T-47N	-S	47	100 MHz,200 mV	8	1300	1.3	150	J,K
CLH1005T-56N	-S	56	100 MHz,200 mV	8	1250	2	150	J,K
CLH1005T-68N	-S	68	100 MHz,200 mV	8	1000	2.2	100	J,K
CLH1005T-82N	-S	82	100 MHz,200 mV	8	900	2.5	100	J,K
CLH1005T-R10	-S	100	100 MHz,200 mV	8	850	2.5	100	J,K

# CLH1005T Series Specification

## 8 CLH1005T Series

### 8.1 Construction:

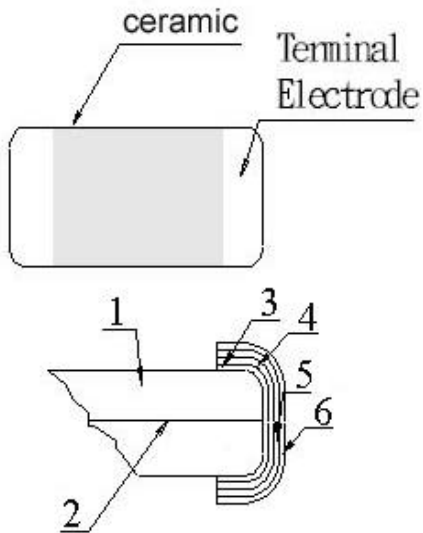

### 8.2 Material List:

NO	PART	MATERIAL
1	<b>Main Substance</b>	Al <sub>2</sub> O <sub>3</sub> -B <sub>2</sub> O <sub>3</sub> -SiO <sub>2</sub>
2	<b>Silver electrode</b>	<b>Ag</b>
3	<b>Silver electrode</b>	<b>Ag</b>
4	<b>Cu plating</b>	<b>Cu</b>
5	<b>Ni plating</b>	<b>Ni</b>
6	<b>Sn plating</b>	<b>Sn</b>

# CLH1005T Series Specification

## 9 Reliability Of Ceramic Multilayer Chip Inductor For High Freq.


### 1-1.Mechanical Performance

No	Item	Specification	Test Method
1-1-1	Flexure Strength	The forces applied on the right conditions must not damage the terminal electrode and the ferrite	Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 30sec *For 100505, substrate dimension is 100x40x0.8mm
1-1-2	Vibration		Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-3	Resistance to Soldering Heat	Appearance: No damage	Pre-heating: 150 , 1min Solder Composition: Sn/Pb = 63/37 Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 260±5 Immersion Time: 10±1sec
1-1-4	Solder ability	The electrodes shall be at least 90% covered with new solder coating	Pre-heating: 150 , 1min Solder Composition: Sn/Pb = 63/37 Solder Temperature: 220±5 Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 245±5 (Pb-Free) Immersion Time: 4±1sec

### 1-2.Environmental Performance

No	Item	Specification	Test Method		
1-2-1	Temperature Cycle	Appearance: No damage Inductance: within±10% of initial value Q change: within±30% of initial value	One cycle:		
			Step	Temperature ( )	Time (min)
			1	-55±3	30
			2	25±2	3
			3	125±3	30
4	25±2	3			
			Total: 100cycles Measured after exposure in the room condition for 24hrs		
1-2-2	Humidity Resistance		Temperature: 40±2 Relative Humidity: 90 ~ 95% Time: 1000hrs Measured after exposure in the room condition for 24hrs		
1-2-3	High Temperature Resistance		Temperature: 125±3 Relative Humidity: 20% Applied Current: Rated Current / Time: 1000hrs Measured after exposure in the room condition for 24hrs		
1-2-4	Low Temperature Resistance		Temperature: -55±3 Relative Humidity: 0% / Time: 1000hrs Measured after exposure in the room condition for 24hrs		

# CLH1005T Series Specification

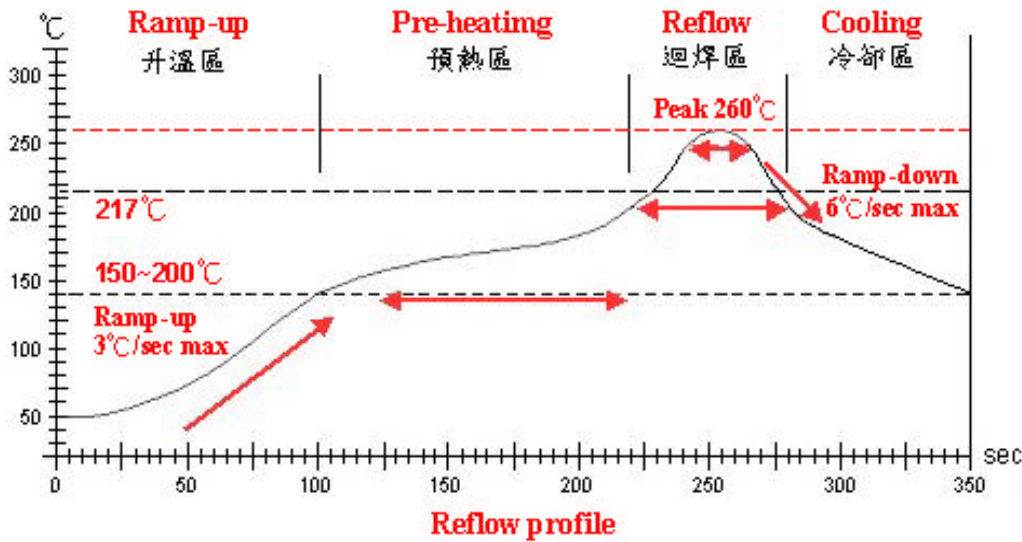

Lead-Free(LF) 標準溫度分析範圍

Refer to J-STD-020C

管制項目 Item.	升温區 Ramp-up	預熱區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp. scope	R.T. ~ 150°C	150°C ~ 200°C	217°C	260±5°C	Peak Temp. ~ 150°C
標準時間 Time spec.	—	60 ~ 180 sec	60 ~ 150sec	20 ~ 40 sec	—
實際時間 Time result	—	75 ~ 100 sec	90 ~ 120sec	20 ~ 35 sec	—

NOTE :

1. Re-flow possible times : within 2 times
2. Nitrogen adopted is recommended while in re-flow



# CLH1005T Series Specification

## 10 TEST DATA FOR PREPRODUCTION SAMPLES

QF-1419

### DESCRIPTION: CLH1005T-15NJ-S

MEAS. Item	L (nH)	Q (MIN.)	SRF(MHz) (TYP.)	RDC ( )	A m/m	B m/m	C m/m	D m/m			
Spec Customer	15±5%										
Suggest		8-0		0.50+0	1.0±0.1	0.5±0.1	0.5±0.1	0.25±0.1			
Test Freq. (MHz)	200mV 100	200mV 100									
1	15	12.4		0.327	1.05	0.52	0.48	0.24			
2	14.8	12.4		0.311	1.05	0.53	0.49	0.26			
3	14.6	12.2		0.312	1.03	0.53	0.49	0.25			
4	14.9	12.5		0.323	1.02	0.51	0.49	0.28			
5	15.1	11.9		0.318	1.04	0.52	0.51	0.23			
6	15.2	12.1		0.315	1.04	0.51	0.5	0.24			
7	15.2	12.2		0.322	1.05	0.52	0.48	0.27			
8	15.4	12		0.314	1.04	0.51	0.48	0.26			
9	14.8	11.8		0.321	1.05	0.51	0.49	0.24			
10	14.9	12.1		0.318	1.03	0.51	0.51	0.21			
11											
12											
13											
14											
15											
X	14.99	12.16		0.3181	1.04	0.517	0.492	0.248			
R	0.8	0.7		0.016	0.03	0.02	0.03	0.07			
CUSTOMER											
SAMPLE											

**TEST INSTRUMENT:**

HP4291A RF IMPEDANCE / MATERIAL ANALYZER FOR L,Q  
 CHEN HWA 502BC / HP4338B FOR RDC  
 HPE4991A&HP8753D FOR SRF

**APPEARANCE AND DIMENSIONS :**

SPEC : MEET ITEM 6.  
 TEST METHOD : VISUAL INSPECTION AND MEASURED WITH SILDE CALIPERS.

**TESTING CONDITIONS :**


	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature (15 to 35 )	20 ± 2
Humidity	Ordinary Humidity (25 to 85 %RH)	60 to 70 %RH



# CLH1005T Series Specification

## 11 PACKAGING

### 11.1 Packaging -Cover tape

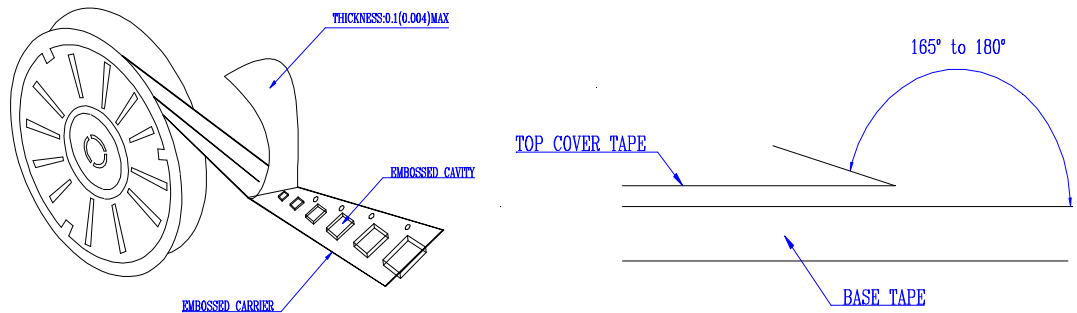


The force for tearing off cover tape is 10 to 60 grams in the arrow direction.

### 11.2 Packaging Quantity

TYPE	BULK	PCS/REEL
CLH1005	✓	10000
CLH1608	✓	4000
CLH2012(09)	✓	4000
CLH2012(12)	✓	3000


### 11.3 Reel Dimensions

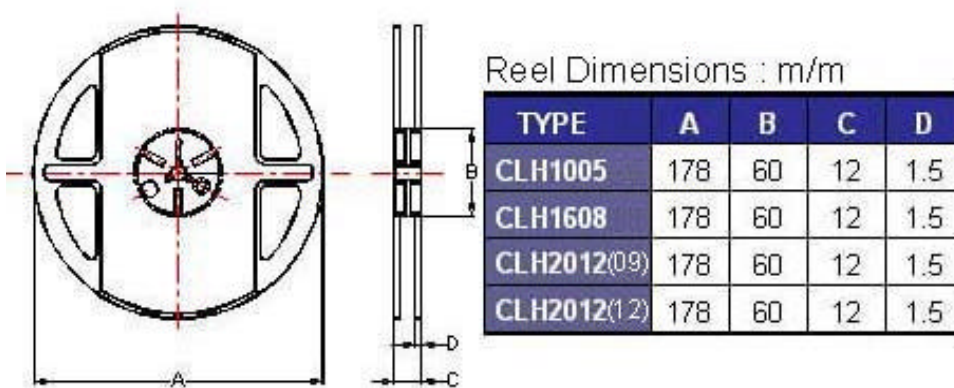

# CLH1005T Series Specification


## 11 PACKAGING

### 11.4 Tape Dimensions in mm

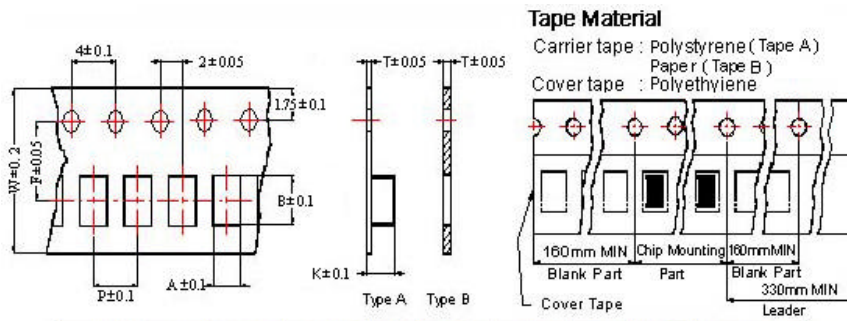

TYPE	A	B	T	W	P	F	K	Tape Typ.
CLH1005	0.65	1.12	0.60	8	2	3.5		B
CLH1608	1.00	1.80	0.95	8	4	3.5		B
CLH2012(09)	1.58	2.42	0.95	8	4	3.5		B
CLH2012(12)	1.35	2.25	0.22	8	4	3.5	1.35	A

## 12 Recommended Pattern

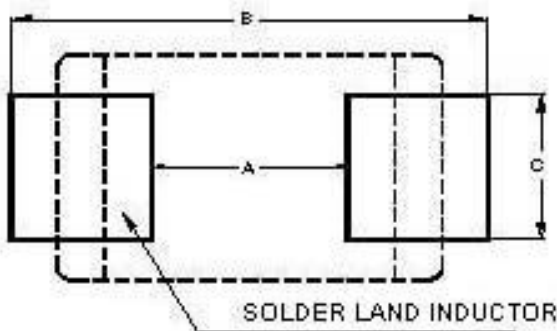

Dimensions in mm

TYPE	A	B	C
CLH1005	0.4	1.2 ~ 1.4	0.4
CLH1608	0.8	2.4 ~ 3.4	0.6
CLH2012(09)	1.2	3.0 ~ 4.0	1
CLH2012(12)	1.2	3.0 ~ 4.0	1

## 13 Note:

1. Please make sure that your product is has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.

# CLH1005T Series Specification

14 Curve:

