

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

FEATURES

1. PhotoMOS relay with high response speed, low leakage current and low On resistance

2. Low capacitance between output terminals ensures high response speed:

The capacitance between output terminals is small, typically 10 pF. This enables for a fast operation speed of 200 μ s.

3. High sensitivity and low On resistance

Maximum 0.3 A of load current can be controlled with input current of 5 mA. The 10 Ω (AQV225N) On resistance is less than our conventional models. With no metallic contacts, the PhotoMOS relay has stable switching characteristics.


4. Low-level off state leakage current

The SSR has an off state leakage current of several milliamperes, whereas the PhotoMOS relay has only 30 pA even with the rated load voltage of 80 V (AQV225N).


5. Controls low-level analog signals

PhotoMOS relay features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

6. Low terminals electromotive force (approx. 1 μ V)

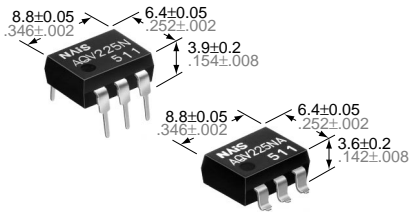

mm inch



TYPICAL APPLICATIONS

- Measuring devices
- Scanner, IC checker, Board tester

TYPES

Type	Output rating*		Part No.				Packing quantity	
			Through hole terminal	Surface-mount terminal				
	Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
AC/DC type	80 V	150 mA	AQV225N	AQV225NA	AQV225NAX	AQV225NAZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.
	200 V	70 mA	AQV227N	AQV227NA	AQV227NAX	AQV227NAZ		
	400 V	50 mA	AQV224N	AQV224NA	AQV224NAX	AQV224NAZ		

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	Type of connection	AQV225N(A)	AQV227N(A)	AQV224N(A)	Remarks	
Input	LED forward current	I_F		50 mA			f = 100 Hz, Duty factor = 0.1%	
	LED reverse voltage	V_R		3 V				
	Peak forward current	I_{FP}		1 A				
	Power dissipation	P_{in}		75 mW				
Output	Load voltage (peak AC)	V_L		80 V	200 V	400 V	A connection: Peak AC, DC B, C connection: DC	
	Continuous load current	I_L		A	0.15 A	0.07 A		0.05 A
				B	0.20 A	0.08 A		0.06 A
				C	0.30 A	0.10 A		0.08 A
	Peak load current	I_{peak}		0.45 A	0.21 A	0.15 A		A connection: 100 ms (1 shot), $V_L = DC$
Power dissipation	P_{out}	360 mW						
Total power dissipation		P_T	410 mW					
I/O isolation voltage		V_{iso}	1,500 V AC					
Temperature limits	Operating	T_{opr}	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures		
	Storage	T_{stg}	-40°C to +100°C -40°F to +212°F					

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV225N(A)	AQV227N(A)	AQV224N(A)	Remarks
Input	LED operate current	Typical	I _{Fon}	—	0.90 mA			I _L = Max.
		Maximum			3.0 mA			
	LED turn off current	Minimum	I _{Foff}	—	0.4 mA			I _L = Max.
		Typical			0.85 mA			
	LED dropout voltage	Typical	V _F	—	1.14 V (1.25 V at I _F = 50 mA)			I _F = 5 mA
		Maximum			1.5 V			
Output	On resistance	Typical	R _{on}	A	7.0 Ω	30 Ω	70 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			10 Ω	50 Ω	100 Ω	
		Typical	R _{on}	B	3.5 Ω	16 Ω	55 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			5 Ω	25 Ω	70 Ω	
		Typical	R _{on}	C	1.8 Ω	8 Ω	28 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			2.5 Ω	12.5 Ω	35 Ω	
	Output capacitance	Typical	C _{out}	—	10 pF			I _F = 0 V _B = 0 f = 1 MHz
		Maximum			15 pF			
	Off state leakage current	Typical	I _{Leak}	—	30 pA	30 pA	90 pA	I _F = 0 V _L = Max.
		Maximum			10 nA			
Transfer characteristics	Switching speed	Turn on time*	T _{on}	—	0.20 ms			I _F = 5 mA I _L = Max.
					Maximum	0.5 ms		
		Turn off time*	T _{off}	—	0.08 ms			I _F = 5 mA I _L = Max.
					Maximum	0.2 ms		
	I/O capacitance	Typical	C _{iso}	—	0.8 pF			f = 1 MHz V _B = 0
		Maximum			1.5 pF			
Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ			500 V DC	

Note: Recommendable LED forward current I_F = 5mA.
*Turn on/Turn off time

For type of connection, see page 31.

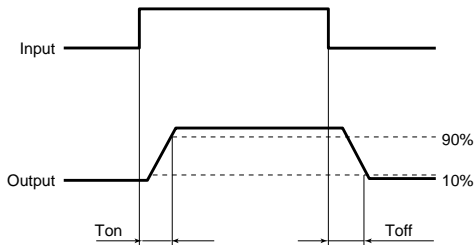


REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

Type of connection: A

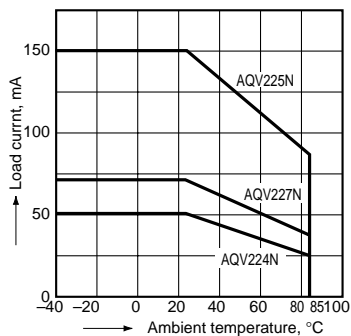


2.-(1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)



2.-(2) On resistance vs. ambient temperature characteristics


Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

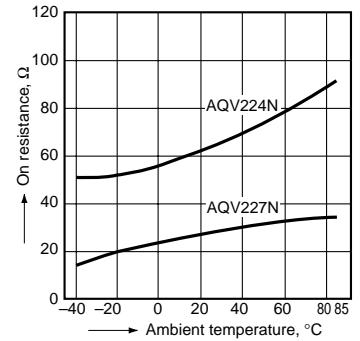

AQV220N


3. Turn on time vs. ambient temperature characteristics

Sample: AQV225N, AQV227N, AQV224N;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

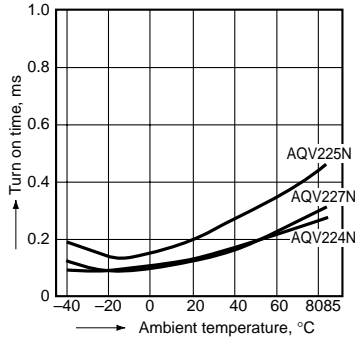


4. Turn off time vs. ambient temperature characteristics

Sample: AQV225N, AQV227N, AQV224N;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)




5. LED operate current vs. ambient temperature characteristics

Sample: AQV225N, AQV227N, AQV224N;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

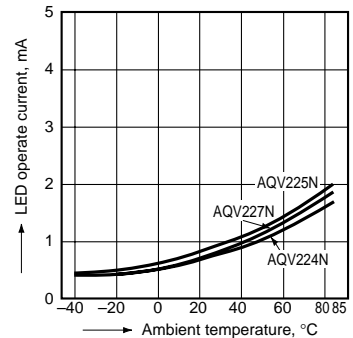


6. LED turn off current vs. ambient temperature characteristics

Sample: AQV225N, AQV227N, AQV224N;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)




7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

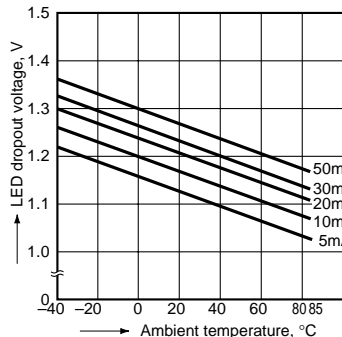


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F




9. Off state leakage current

Sample: AQV225N, AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

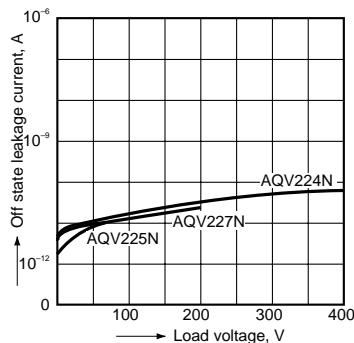


10. LED forward current vs. turn on time characteristics

Sample: AQV225N, AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

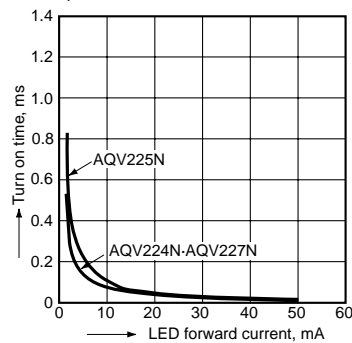


11. LED forward current vs. turn off time characteristics

Sample: AQV225N, AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

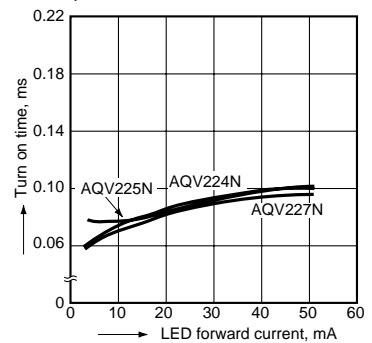


12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz, 30 mVrms;
Ambient temperature: 25°C 77°F



13. Isolation characteristics (50 Ω impedance)

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

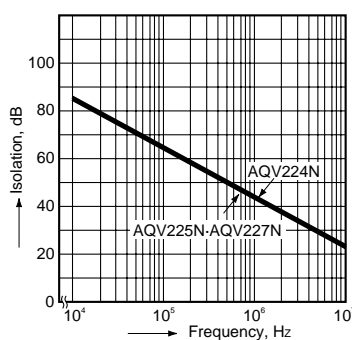

14. Insertion loss characteristics (50 Ω impedance)

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

