

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# NAIS

## HE (High-function Economy) Type [1-Channel (Form A) Type] —With LED Display—

# PhotoMOS RELAYS

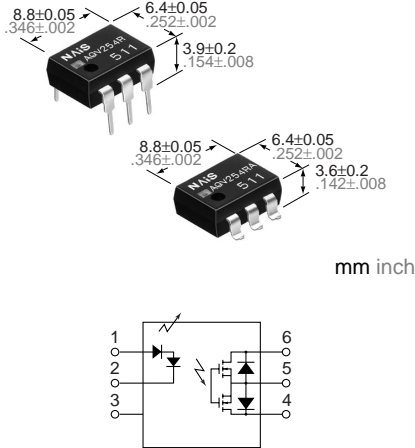


mm inch

### FEATURES

- **Low on resistance and LED display**
- **Same compact size of our conventional relays without LED display**  
(W) 6.4×(D) 8.8×(H) 3.9 mm (W) 0.252×(D) 0.346×(H) 0.154 inch.
- **Controls low-level analog signals**  
PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low level voltage signals or analog signals without distortion.
- **High sensitivity and low on resistance**  
A stable relay that has a low on resistance of 16 Ω, no metal contacts, and the ability to control a maximum load current of 0.25 A with an input current of 5 mA.

- **Low-level off state leakage current**  
In contrast to the SSR with its off state leakage current of several milliamps, the PhotoMOS relay features a very small off state leakage current of only 100 pA even at a high load voltage of 400 V.

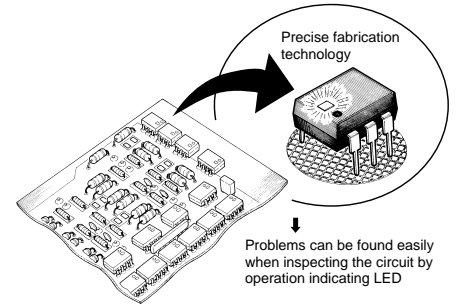

### TYPICAL APPLICATIONS

- Telephones
- Measuring instruments
- Game machines
- High-speed inspection machines
- Industrial equipment

### TYPES

Type	Output rating*		Part No.				Packing quantity	
			Through hole terminal	Surface-mount terminal			Tube	Tape and reel
	Load voltage	Load current	Tube packing style	Tape and reel packing style				
				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC type	400 V	150 mA	AQV254R	AQV254RA	AQV254RAX	AQV254RAZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs

\*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

### RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV254R(A)	Remarks	
Input	LED forward current	$I_F$		25 mA	f = 100 Hz, Duty factor = 0.1%	
	LED reverse voltage	$V_R$		3 V		
	Peak forward current	$I_{FP}$		60 mA		
	Power dissipation	$P_{in}$		90 mW		
Output	Load voltage (peak AC)	$V_L$		400 V	A connection: Peak AC, DC B, C connection: DC	
	Continuous load current	$I_L$		A		0.15 A
				B		0.18 A
				C		0.25 A
	Peak load current	$I_{peak}$				0.5 A
Power dissipation	$P_{out}$		360 mW			
Total power dissipation		$P_T$		410 mW		
I/O isolation voltage		$V_{iso}$		1,500 V AC		
Temperature limits	Operating	$T_{opr}$		-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures	
	Storage	$T_{stg}$		-40°C to +100°C -40°F to +212°F		

# AQV254R


## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV254R(A)	Remarks		
Input	LED operate current	Typical	I <sub>Fon</sub>	—	1.0 mA	I <sub>L</sub> = Max.	
		Maximum			3.0 mA		
	LED turn off current	Minimum	I <sub>Foff</sub>	—	0.4 mA	I <sub>L</sub> = Max.	
		Typical			0.9 mA		
	LED dropout voltage	Typical	V <sub>F</sub>	—	2.8 V	I <sub>F</sub> = 5 mA	
		Maximum			3.5 V		
Output	On resistance	Typical	R <sub>on</sub>	A	12.4 Ω	I <sub>F</sub> = 5 mA I <sub>L</sub> = Max. Within 1 s on time	
		Maximum			16 Ω		
		Typical	R <sub>on</sub>	B	6.2 Ω		
		Maximum			8 Ω		
	Typical	R <sub>on</sub>	C	3.1 Ω	I <sub>F</sub> = 5 mA I <sub>L</sub> = Max. Within 1 s on time		
	Maximum			4 Ω			
	Off state leakage current		Maximum	I <sub>Leak</sub>	—	1 μA	I <sub>F</sub> = 0 V <sub>L</sub> = Max.
	Transfer characteristics	Switching speed	Turn on time*	T <sub>on</sub>	—	0.8 ms	I <sub>F</sub> = 5 mA
Maximum						2 ms	I <sub>L</sub> = Max.
Turn off time*			T <sub>off</sub>	—	0.05 ms	I <sub>F</sub> = 5 mA	
					Maximum	0.2 ms	I <sub>L</sub> = Max.
I/O capacitance		Typical	C <sub>iso</sub>	—	1.3 pF	f = 1 MHz	
		Maximum			3 pF	V <sub>B</sub> = 0	
Initial I/O isolation resistance		Minimum	R <sub>iso</sub>	—	1,000 MΩ	500 V DC	

Note: Recommendable LED forward current I<sub>F</sub> = 5 mA.

For type of connection, see Page 31.

\*Turn on/Turn off time

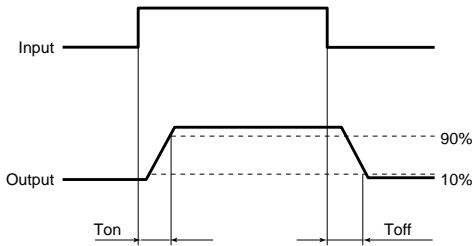


## REFERENCE DATA

### 1. Input current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F;


Type of connection: A

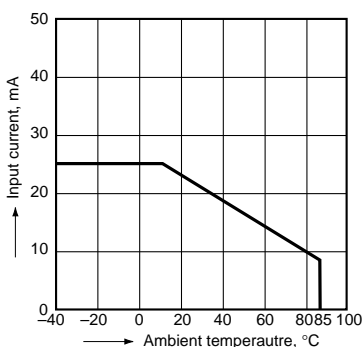

### 2. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F;

Type of connection: A

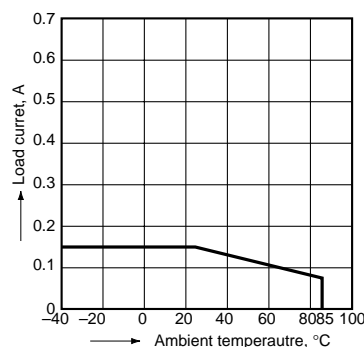


### 3. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
LED current: 5 mA;  
Load voltage: 400 V (DC);  
Continuous load current: 150 mA (DC)

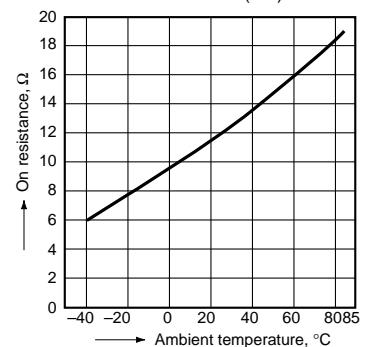


4. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC);  
Continuous load current: 150 mA (DC)




5. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC);  
Continuous load current: 150 mA (DC)




6. LED operate vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 150 mA (DC)




7. LED turn off current vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 150 mA (DC)




8. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 25 mA




9. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F




10. Off state leakage current

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F




11. LED forward current vs. turn on time characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: 400 V (DC);  
Continuous load current: 150 mA (DC);  
Ambient temperature: 25°C 77°F



12. LED forward current vs. turn off time characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: 400 V (DC);  
Continuous load current: 150 mA (DC);  
Ambient temperature: 25°C 77°F



13. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

