



## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# MU Type Optical In-Line Attenuators

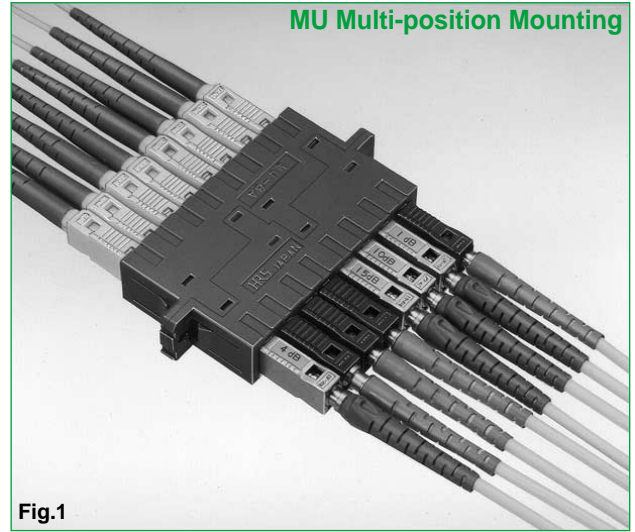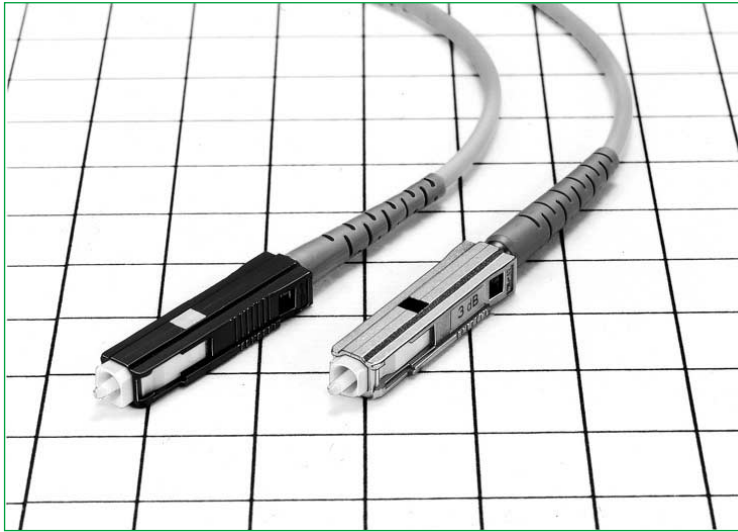

## ■ Features

### 1. Smaller package

Hirose's original design combines a plug and attenuator into the same connector size of a standard MU plug, and the superior design enable to save a space using 4.5 mm pitch MU multiple adapters as shown in Fig. 1 and 2.

### 2. Easy to Change attenuation level

Easy to change the attenuation level by exchanging the attenuator part with a simple push-twist lock as shown in Fig.3(See page 80). 15 levels of attenuation are currently available : 0,1,2,3,4,5,6,7,8,9,10,12.5,15,17.5,and 20 dB

### 3. Insertion and extraction tool

The MU standard tool is available as shown in Fig. 4.

### 4. Maximum input power :100mW

### 5. Please contact us if you have any requests. Hirose will offer excellent solutions to meet your requirements.

## ■ Applications

Power level adjustment of optical fiber communication networks.

Fig.1

### Save 16.7mm space

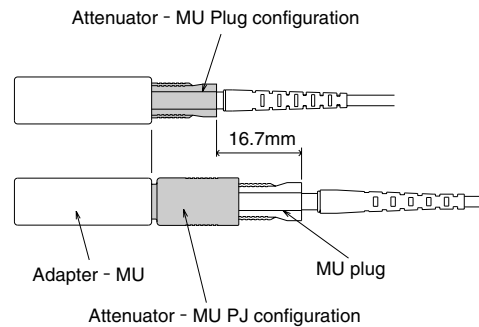


Fig.2

### Easy to change an attenuation part

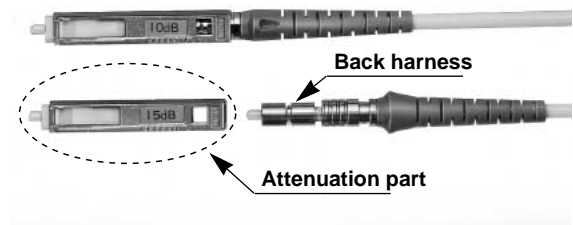


Fig.3

### MU standard tool is available



Fig.4

## Product Specifications

Ratings	Operation temperature range	-25°C to +70°C	Storage temperature range	-25°C to +70°C
	Max. Input Power	100mW	Fiber type	SM

Item		Test Method	Specifications														
Optical Characteristics	Attenuation	Measurement at a point within the wavelength of 1310 ± 30 nm, and a point within the wavelength of 1550 ± 30 nm.	<table border="1"> <thead> <tr> <th colspan="2">Attenuation Tolerance</th> </tr> </thead> <tbody> <tr> <td>0dB</td> <td>≤0.5dB</td> </tr> <tr> <td>1,2dB</td> <td>±0.5dB</td> </tr> <tr> <td>3,4,5,6dB</td> <td>±0.8dB</td> </tr> <tr> <td>7,8,9dB</td> <td>±1.0dB</td> </tr> <tr> <td>10dB</td> <td>±1.2dB</td> </tr> <tr> <td>12.5,15,17.5,20dB</td> <td>±ATT×10%dB</td> </tr> </tbody> </table>	Attenuation Tolerance		0dB	≤0.5dB	1,2dB	±0.5dB	3,4,5,6dB	±0.8dB	7,8,9dB	±1.0dB	10dB	±1.2dB	12.5,15,17.5,20dB	±ATT×10%dB
	Attenuation Tolerance																
0dB	≤0.5dB																
1,2dB	±0.5dB																
3,4,5,6dB	±0.8dB																
7,8,9dB	±1.0dB																
10dB	±1.2dB																
12.5,15,17.5,20dB	±ATT×10%dB																
Return Loss(R.L.)		≥40dB															
Mechanical Characteristics	Engagement and separation forces	Engagement and separation forces at 50mm/s.	Engagement force: ≤12.5 N Separation force: ≤12.5 N														
	Gauge retention force	Zirconia gauge at φ1.249 ± 0.0005 mm.	1.0N to 2.5N														
	Mating durability	Insertion and extraction number for connectors:500 Insertion and extraction number for an attenuation element:50	1) Attenuation shall be satisfied after the test. 2) No breakage, crack or looseness on components.														
	Vibration	For 3 hours at an amplitude of 1.5mm. with the frequency range 10 to 55Hz. In each of three mutually perpendicular plane.															
Shock	3 times in each of three mutually perpendicular axis with the acceleration 981m/s <sup>2</sup> .																
Environmental Characteristics	Composite Temperature-humidity Cyclic test	Humidity : 90% to 96% Temperature : -10°C to 65°C, Cyclic : 10 cycles(240 hours)															
	Temperature cycling	Temp : 25→-25→-25→70→70→25°C Time : 15 30 30 30 15 min Cyclic : 10 cycles															
	Dry heat	Temperature : 85°C      Time : 500 hours															
	Cold	Temperature : -25°C      Time : 500 hours															
	Salt Mist	Salt Mist : 5%      Time : 48 hours	No significant corrosion.														

## Materials

Part	Material
Body	Zinc alloy
Ferrule	Zirconia
Split sleeve	Zirconia

## Ordering Information


**HMU - PAT - FH - K 1 01**

①      ②      ③      ④ ⑤ ⑥

① Series name	: HMU
② Indicates a in-line type attenuator	
③ Indicates the attenuation part	
④ Polishing type	K:AdPC
⑤ Applicable optical fiber	1:SM
⑥ Attenuation	00:0 dB (Through)12:12.5dB,17:17.5dB 01 to N: Attenuation (dB)


Note: This attenuator is used only with the cable assembly shown on the next page.

## In-line attenuators

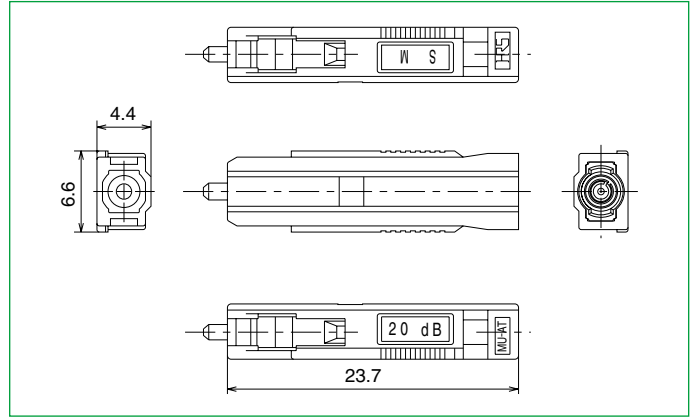


Part Number	CL No.	Attenuation	Specification	Return loss	Wavelength	Split sleeve	Fiber type
HMU-PAT-FH-K100	827-0001-8	0 dB	0.5dB max.	≥40dB	1310nm 1550nm	Zirconia	SM
HMU-PAT-FH-K101	827-0002-0	1 dB	±0.5dB				
HMU-PAT-FH-K102	827-0003-3	2 dB	±0.8dB				
HMU-PAT-FH-K103	827-0004-6	3 dB					
HMU-PAT-FH-K104	827-0005-9	4 dB					
HMU-PAT-FH-K105	827-0006-1	5 dB	±1dB				
HMU-PAT-FH-K106	827-0007-4	6 dB					
HMU-PAT-FH-K107	827-0011-1	7 dB					
HMU-PAT-FH-K108	827-0012-4	8 dB	±1.2dB				
HMU-PAT-FH-K109	827-0013-7	9 dB					
HMU-PAT-FH-K110	827-0008-7	10 dB					
HMU-PAT-FH-K112	827-0014-0	12.5dB	±ATT×10%dB				
HMU-PAT-FH-K115	827-0009-0	15 dB					
HMU-PAT-FH-K117	827-0015-2	17.5dB					
HMU-PAT-FH-K120	827-0010-9	20 dB					

## Back Cable Assembly (2mm diameter cable type)

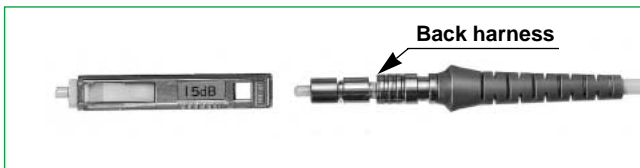

The back cable assembly is supplied by Hirose.

Please contact your Hirose sales representative for details concerning your back cable needs, including cable length and mating connector requirements.



## Ordering Information (Back cable assembly)

**HMU - PAT BH 101 K Q - L**

①      ②      ③      ④      ⑤      ⑥      ⑦

① Series Name HMU	⑤ Polishing type K: AdPC
② Indicates a in-line type attenuator	⑥ Fiber cable type(Note)
③ Indicate a back cable assembly	Q: SM-9.5/125, diameter 2mm Jacket color: Yellow
④ Mating connector (Note)	⑦ Cable length
011 : FC connector, 2 mm diameter cable	Unit: Meters
04G : SC connector, 2 mm diameter cable	
101 : MU connector, 2 mm diameter cable	

Note: These are examples of offered cable assemblies. They will differ depending on the applicable cable diameter and the type of boot. For exact cable assembly specifications, specify the connector type at the mating side and the required total length. Contact your Hirose Electric account representative.