# 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网,版权归原作者所有。如读者和版权方有任何异议请及时告之,我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译,其目的是协助用户阅读,该译文无法自动跟随原稿更新,同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料,来自厂商的技术支持或者使用者的心得体会等,其内容可能存在描 叙上的差异,建议读者做出适当判断。
- 4.如需与我们联系,请发邮件到marketing@iczoom.com,主题请标有"数据手册"字样。


# **Read Statement**

- 1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
- 2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
- 3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
- 4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".



### Vishay High Power Products

### Schottky Rectifier, 2 x 8 A

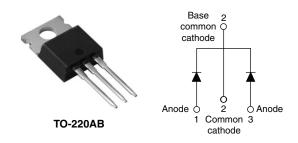

PRODUCT SUMMARY					
I <sub>F(AV)</sub> 2 x 8 A					
V <sub>R</sub>	60 to 100 V				

#### **FEATURES**

- 175 °C T<sub>J</sub> operation
- · Center tap configuration
- · Low forward voltage drop
- · High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Designed and qualified for industrial level

#### **DESCRIPTION**

This center tap Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

MAJOR RATINGS AND CHARACTERISTICS				
SYMBOL	CHARACTERISTICS	VALUES	UNITS	
I <sub>F(AV)</sub>	Rectangular waveform	16	A	
V <sub>RRM</sub>		60 to 100	V	
I <sub>FSM</sub>	t <sub>p</sub> = 5 μs sine	850	A	
V <sub>F</sub>	8 Apk, T <sub>J</sub> = 125 °C (per leg)	0.58	V	
T <sub>J</sub>	Range	- 55 to 175	°C	

VOLTAGE RATINGS					
PARAMETER	SYMBOL	16CTQ060	16CTQ080	16CTQ100	UNITS
Maximum DC reverse voltage	$V_{R}$	60	80	100	V
Maximum working peak reverse voltage	$V_{RWM}$	00	80	100	V

ABSOLUTE MAXIMUM RATINGS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum average per le	´   .	50 % duty cycle at T <sub>C</sub> = 148 °C, rectangular waveform		8	Α
See fig. 5 per device			16		
Maximum peak one cycle non-repetitive		5 µs sine or 3 µs rect. pulse	Following any rated load condition and with rated	850	Α
surge current per leg See fig. 7	I <sub>FSM</sub>	10 ms sine or 6 ms rect. pulse	V <sub>RRM</sub> applied	275	A
Non-repetitive avalanche energy per leg	E <sub>AS</sub>	T <sub>J</sub> = 25 °C, I <sub>AS</sub> = 0.50 A, L = 60 mH		7.50	mJ
Repetitive avalanche current per leg		Current decaying linearly to zero in 1 $\mu$ s Frequency limited by T <sub>J</sub> maximum V <sub>A</sub> = 1.5 x V <sub>R</sub> typical		0.50	Α

Document Number: 93241 Revision: 22-Aug-08

## 16CTQ... Series

# Vishay High Power Products Schottky Rectifier, 2 x 8 A



ELECTRICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
	V <sub>FM</sub> <sup>(1)</sup>	8 A	T <sub>J</sub> = 25 °C	0.72	V
Maximum forward voltage drop per leg		16 A		0.88	
See fig. 1		8 A	T <sub>J</sub> = 125 °C	0.58	
		16 A		0.69	
Maximum reverse leakage current per leg	I <sub>RM</sub> <sup>(1)</sup>	T <sub>J</sub> = 25 °C	$V_R$ = rated $V_R$	0.55	- mA
See fig. 2	'RM '''	T <sub>J</sub> = 125 °C		7.0	
Threshold voltage	V <sub>F(TO)</sub>	$T_J = T_J$ maximum		0.415	V
Forward slope resistance	r <sub>t</sub>			11.07	mΩ
Maximum junction capacitance per leg	C <sub>T</sub>	$V_R = 5 V_{DC}$ (test signal range 100 kHz to 1 MHz) 25 °C		500	pF
Typical series inductance per leg	L <sub>S</sub>	Measured lead to lead 5 mm from package body		8.0	nΗ
Maximum voltage rate of change	dV/dt	Rated V <sub>R</sub>		10 000	V/µs

#### Note

 $<sup>^{(1)}\,</sup>$  Pulse width < 300  $\mu s,$  duty cycle < 2 %

THERMAL - MECHANICAL SPECIFICATIONS						
PARAMETER		SYMBOL	TEST CONDITIONS	VALUES	UNITS	
Maximum junction and stora temperature range	age	T <sub>J</sub> , T <sub>Stg</sub>		- 55 to 175	°C	
Maximum thermal resistance junction to case per leg	e,	R <sub>thJC</sub>	DC eneration	3.25	°C/W	
Maximum thermal resistance junction to case per package	-	R <sub>thJC</sub>	DC operation	1.63	C/VV	
Typical thermal resistance, case to heatsink		R <sub>thCS</sub>	Mounting surface, smooth and greased	0.50		
Approximate weight				2	g	
Approximate weight				0.07	OZ.	
Mounting torque —	minimum			6 (5)	kgf · cm	
	maximum			12 (10)	(lbf $\cdot$ in)	
				16CT	16CTQ060	
Marking device			Case style TO-220AB	16CT	16CTQ080	
				16CT	16CTQ100	



### Schottky Rectifier, 2 x 8 A Vishay High Power Products

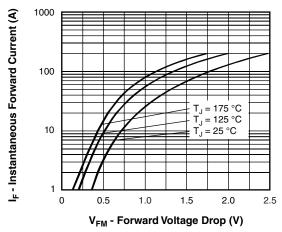


Fig. 1 - Maximum Forward Voltage Drop Characteristics (Per Leg)

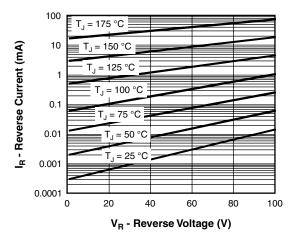


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage (Per Leg)

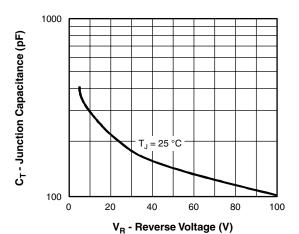


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage (Per Leg)

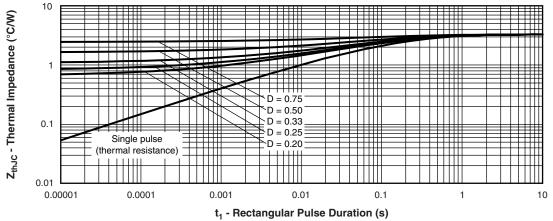


Fig. 4 - Maximum Thermal Impedance Z<sub>thJC</sub> Characteristics (Per Leg)

# Vishay High Power Products Schottky Rectifier, 2 x 8 A



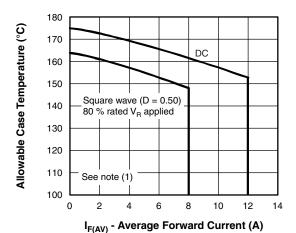


Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current (Per Leg)

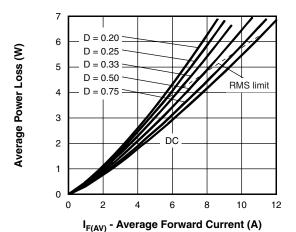


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

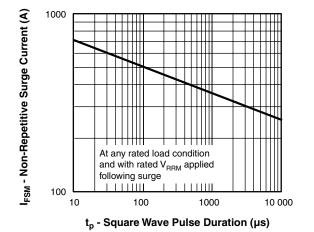


Fig. 7 - Maximum Non-Repetitive Surge Current (Per Leg)

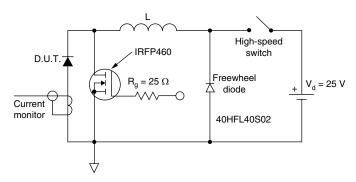


Fig. 8 - Unclamped Inductive Test Circuit

#### Note

 $^{(9)}$  Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ; Pd = Forward power loss =  $I_{F(AV)} \times V_{FM}$  at  $(I_{F(AV)}/D)$  (see fig. 6); Pd<sub>REV</sub> = Inverse power loss =  $V_{R1} \times I_{R}$  (1 - D);  $I_{R}$  at  $V_{R1}$  = 80 % rated  $V_{R}$  applied


Document Number: 93241 Revision: 22-Aug-08



## Schottky Rectifier, 2 x 8 A Vishay High Power Products

#### **ORDERING INFORMATION TABLE**

**Device code** 



1 - Current rating (16 = 16 A)

Circuit configuration

C = Common cathode

3 - Package

T = TO-220

4 - Schottky "Q" series

060 = 60 V 080 = 80 V

5 - Voltage ratings

None = Standard production

100 = 100 V

• PbF = Lead (Pb)-free

Tube standard pack quantity: 50 pieces

LINKS TO RELATED DOCUMENTS					
Dimensions http://www.vishay.com/doc?95222					
Part marking information	http://www.vishay.com/doc?95225				
SPICE model	http://www.vishay.com/doc?95279				



Vishay

### **Disclaimer**

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Revision: 18-Jul-08

Document Number: 91000 www.vishay.com