

阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Coiltronics DR124 Series

Low profile power inductors

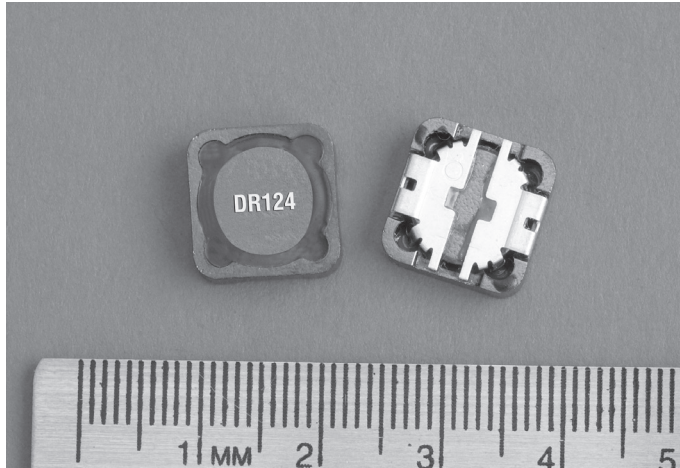

Product description

- Lead free, RoHS compliant
- 125°C maximum total temperature operation
- Low profile surface mount inductor
- 12.5mm x 12.5mm x 4.5mm shielded drum core
- Inductance range from 0.47µH to 1000µH
- Current range from 24.4 to 0.44 Amps
- Frequency range up to 1MHz
- Ferrite core material

Applications

- Notebook power, LCD panels
- Computer, DVD players, and portable power devices
- DC-DC Converters
- Buck, boost, forward, and resonant converters
- Noise filtering and filter chokes

Environmental data

- Storage temperature range (Component): -40°C to +125°C
- Operating temperature range: -40°C to +125°C (ambient + self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant

Packaging:

- Supplied in tape and reel packaging, 750 per reel



Powering Business Worldwide



The Coiltronics brand of magnetics (formerly of the Bussmann Division of Cooper Industries) is now part of Eaton's Electrical Group, Electronics Division.

Coiltronics is now part of Eaton
Same great products plus even more.


Product specifications

Part Number	Rated Inductance (μH)	OCL ¹ μH±20%	I _{rms} ² Amps	I _{sat} ³ Amps	DCR mΩ @20°C Typ	DCR mΩ @20°C Max	K-factor ⁴
DR124-R47-R	0.47	0.42	16.0	24.40	2.2	2.7	17.51
DR124-1R0-R	1.0	0.83	13.9	18.00	3.00	3.6	12.50
DR124-1R5-R	1.5	1.37	11.1	14.00	4.75	5.7	9.73
DR124-2R2-R	2.2	2.04	9.1	11.45	5.92	7.1	7.96
DR124-3R9-R	3.9	3.80	7.0	8.40	12.50	15.0	5.84
DR124-4R7-R	4.7	4.88	6.5	7.65	13.50	16.2	5.15
DR124-6R8-R	6.8	6.10	5.6	6.47	18.06	21.7	4.61
DR124-8R2-R	8.2	7.45	5.2	6.22	21.67	26.0	4.17
DR124-100-R	10	8.94	4.5	5.80	23.33	28.0	3.81
DR124-120-R	12	11.5	4.1	4.96	31.67	38.0	3.50
DR124-150-R	15	14.2	3.6	4.62	37.30	44.8	3.02
DR124-180-R	18	16.2	3.4	4.32	46.97	56.4	2.82
DR124-220-R	22	20.7	3.2	3.83	53.99	64.8	2.50
DR124-270-R	27	25.7	2.8	3.44	66.67	80.0	2.24
DR124-330-R	33	31.2	2.6	3.12	80.83	97.0	2.04
DR124-390-R	39	37.3	2.3	2.85	110.00	132.0	1.86
DR124-470-R	47	44.0	2.2	2.63	124.66	149.6	1.72
DR124-560-R	56	54.9	2.0	2.35	144.32	173.2	1.54
DR124-680-R	68	67.1	1.8	2.13	183.33	220.0	1.39
DR124-820-R	82	80.5	1.7	1.94	212.72	255.3	1.27
DR124-101-R	100	95.1	1.5	1.79	256.67	308.0	1.17
DR124-121-R	120	111	1.3	1.65	311.18	373.4	1.08
DR124-151-R	150	146	1.3	1.44	371.02	445.2	0.94
DR124-181-R	180	179	1.1	1.30	501.66	602.0	0.87
DR124-221-R	220	216	1.0	1.15	558.00	669.6	0.77
DR124-271-R	270	256	0.88	1.09	725.00	870.0	0.71
DR124-331-R	330	327	0.83	0.92	825.00	990.0	0.63
DR124-471-R	470	460	0.68	0.74	1242.50	1491.0	0.53
DR124-681-R	680	669	0.56	0.65	1845.83	2215.0	0.45
DR124-821-R	820	825	0.53	0.62	2109.17	2351.0	0.40
DR124-102-R	1000	998	0.44	0.53	2898.00	3477.00	0.37

1. Open Circuit Inductance Test Parameters: 100kHz, 0.25V, 0.0A_{dc}.
2. I_{rms}: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.
3. I_{sat}: Amps peak for approximately 25% rolloff (@25°C).

4. K-factor: Used to determine B_{pp} for core loss (see graph).
B_{pp} = K*L*ΔI, B_{pp} (mT), K: (K factor from table), L: (Inductance in μH), ΔI (Peak to peak ripple current in Amps).
5. Part Number Definition: DR124-xxx-R
- DR124 = Product code and size; -xxx = Inductance value in uH;
- R = decimal point; If no R is present, third character = # of zeros.
- "-R" suffix = RoHS compliant


Dimensions - mm

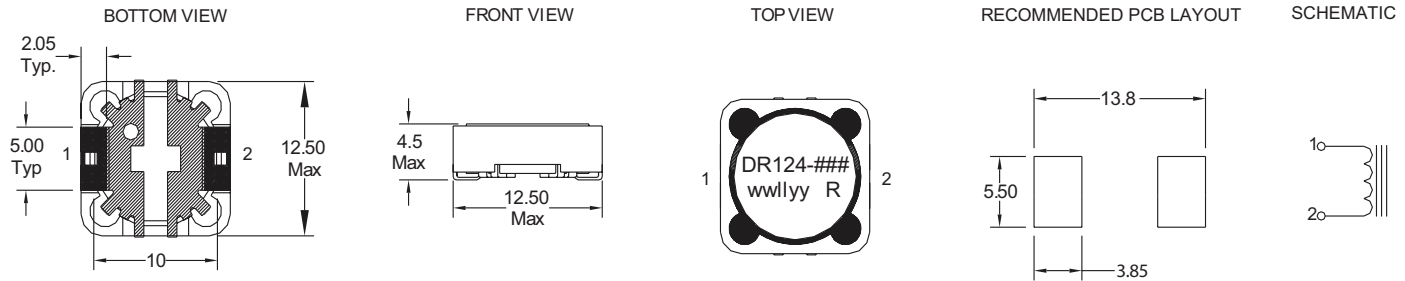

Dimensions are in millimeters.


wwlyy = Date code, R = Revision level.

Packaging information - mm

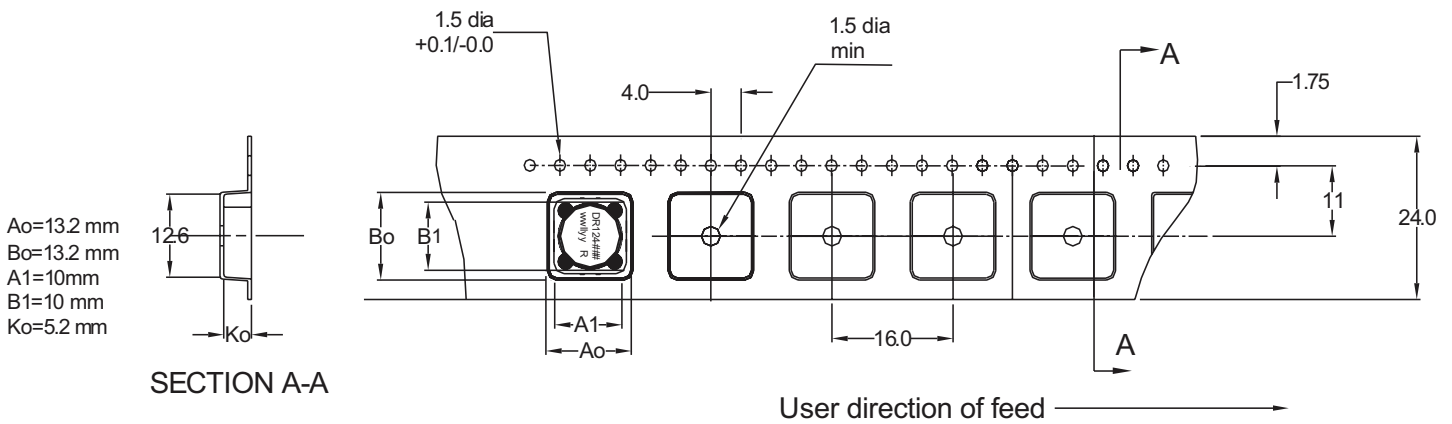


Parts packaged on 13" Diameter reel, 750 parts per reel.


Core loss

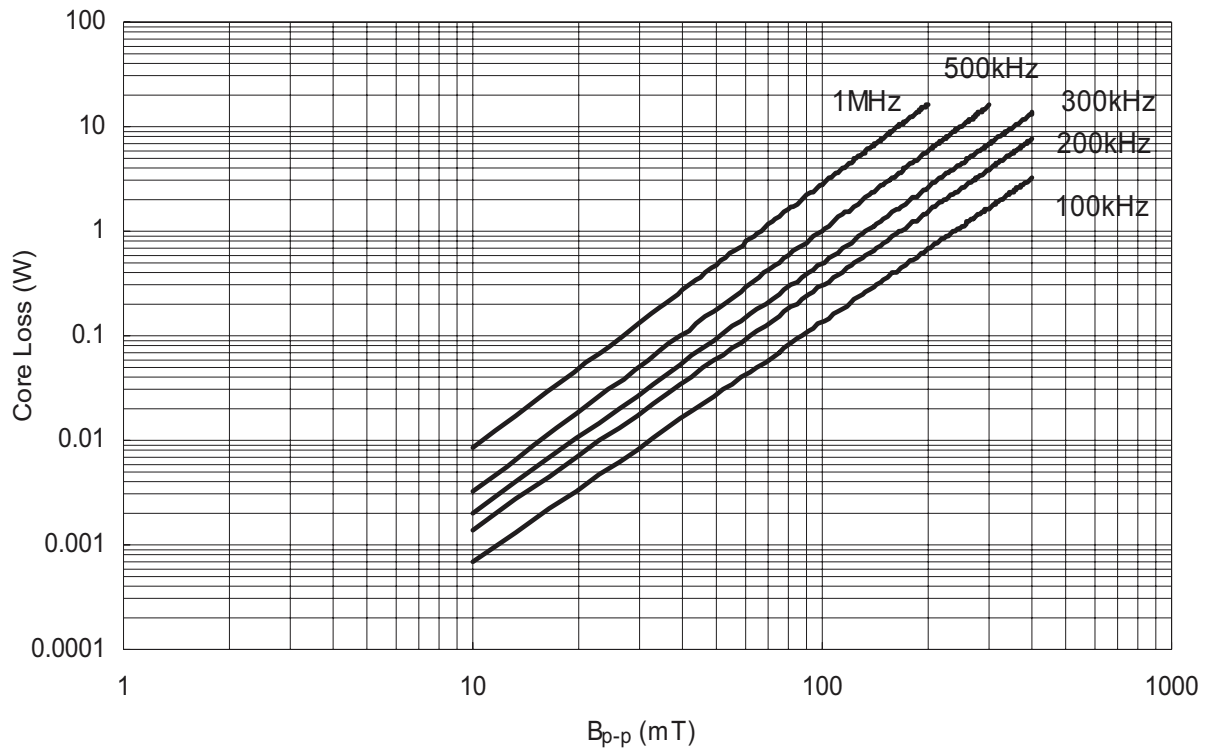

Temperature rise vs. loss

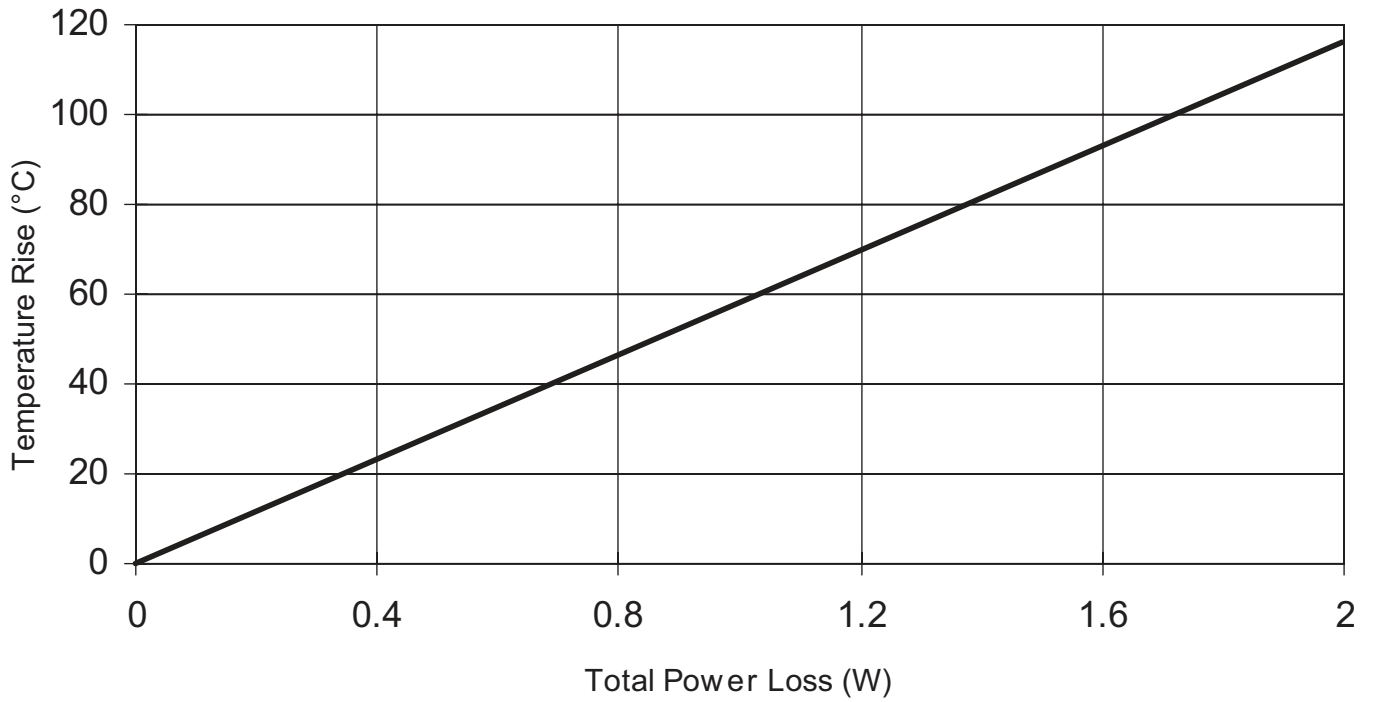

Inductance characteristics

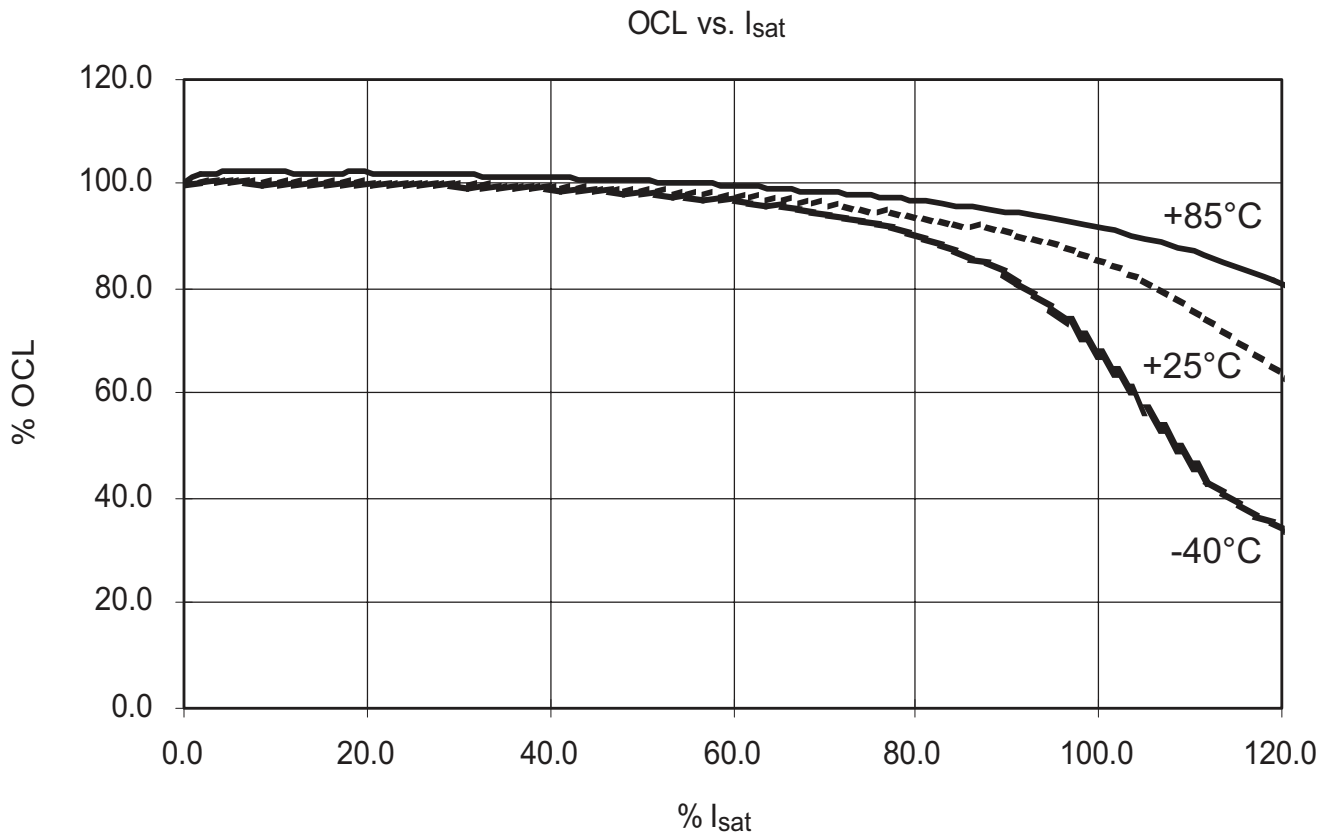

Solder reflow profile

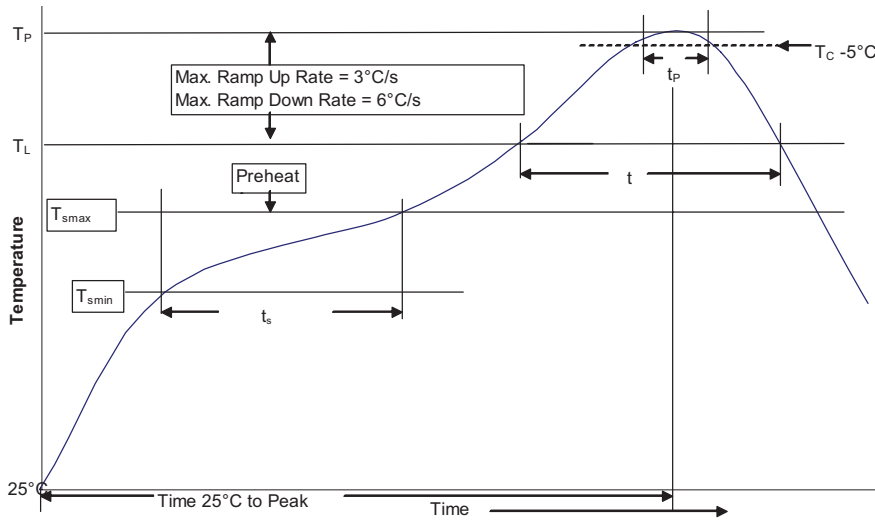


Table 1 - Standard SnPb Solder (T_c)

Package Thickness	Volume mm^3 <350	Volume mm^3 ≥ 350
<2.5mm	235°C	220°C
$\geq 2.5\text{mm}$	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_c)

Package Thickness	Volume mm^3 <350	Volume mm^3 350 - 2000	Volume mm^3 >2000
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T_{smin})	100°C	150°C
• Temperature max. (T_{smax})	150°C	200°C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T_{smax} to T_p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_c)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_p to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

North America

Eaton's Electrical Group
Electronics Division
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Eaton's Electrical Group
Electronics Division
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-636-527-1607

Europe

Eaton's Electrical Group
Electronics Division
Burton-on-the-Wolds
Leicestershire, LE 12 5th UK
Phone: +44 (0) 1509 882 600
Fax: +44 (0) 1509 882 786

Eaton's Electrical Group
Electronics Division
Avda Santa Eulalia, 290
Terrassa, Barcelona 08223 Spain
Phone: +34-93-736-2813
Fax: +34-93-783-5055

Asia Pacific

Eaton's Electrical Group
Electronics Division
No.2, #06-01
Serangoon North Avenue 5
Singapore 554911
Tel: +65 6645 9888
Fax: +65 6728 3155

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

**Eaton's Electrical Group
Electronics Division**
114 Old State Road
Ellisville, MO 63021
United States
www.eaton.com/elx



Powering Business Worldwide

© 2014 Eaton
All Rights Reserved
Publication No. 4141 — BU-SB14114
April 2014

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

www.eaton.com/elx

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

[DR124-151-R](#) [DR124-R47-R](#) [DR124-1R0-R](#) [DR124-1R5-R](#) [DR124-100-R](#) [DR124-101-R](#) [DR124-102-R](#) [DR124-120-R](#) [DR124-121-R](#) [DR124-150-R](#) [DR124-180-R](#) [DR124-181-R](#) [DR124-2R2-R](#) [DR124-220-R](#) [DR124-221-R](#) [DR124-270-R](#) [DR124-271-R](#) [DR124-3R9-R](#) [DR124-390-R](#) [DR124-4R7-R](#) [DR124-470-R](#) [DR124-471-R](#) [DR124-560-R](#) [DR124-6R8-R](#) [DR124-680-R](#) [DR124-8R2-R](#) [DR124-820-R](#) [DR124-821-R](#)