

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement


1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Data Sheet


Description

Avago Technologies' ATF-36077 is an ultra-low-noise Pseudomorphic High Electron Mobility Transistor (PHEMT), packaged in a low parasitic, surface-mountable ceramic package. Properly matched, this transistor will provide typical 12 GHz noise figures of 0.5 dB, or typical 4 GHz noise figures of 0.3 dB. Additionally, the ATF-36077 has very low noise resistance, reducing the sensitivity of noise performance to variations in input impedance match, making the design of broadband low noise amplifiers much easier. The premium sensitivity of the ATF-36077 makes this device the ideal choice for use in the first stage of extremely low noise cascades. The repeatable performance and consistency make it appropriate for use in Ku-band Direct Broadcast Satellite (DBS) Television systems, C-band Television Receive Only (TVRO) LNAs, or other low noise amplifiers operating in the 2-18 GHz frequency range.

77 Package



Pin Configuration



Features

- **PHEMT Technology**
- **Ultra-Low Noise Figure:**
 - 0.5 dB Typical at 12 GHz
 - 0.3 dB Typical at 4 GHz
- **High Associated Gain:**
 - 12 dB Typical at 12 GHz
 - 17 dB Typical at 4 GHz
- **Low Parasitic Ceramic Microstrip Package**
- **Tape-and-Reel Packing Option Available**

Applications

- **12 GHz DBS LNB (Low Noise Block)**
- **4 GHz TVRO LNB (Low Noise Block)**
- **Ultra-Sensitive Low Noise Amplifiers**

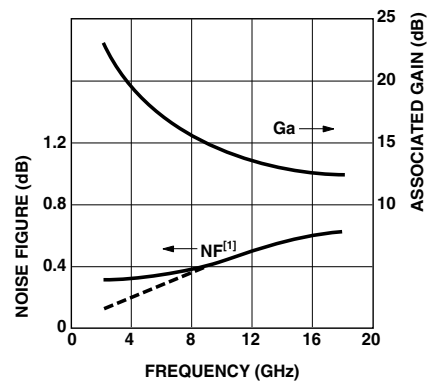


Figure 1. ATF-36077 Optimum Noise Figure and Associated Gain vs. Frequency for $V_{DS} = 1.5$ V, $I_D = 10$ mA.

This GaAs PHEMT device has a nominal 0.2 micron gate length with a total gate periphery (width) of 200 microns. Proven gold based metalization systems and nitride passivation assure rugged, reliable devices.

Note: 1. See Noise Parameter Table.

ATF-36077 Absolute Maximum Ratings

Symbol	Parameter	Units	Absolute Maximum ^[1]
V _{DS}	Drain – Source Voltage	V	+3
V _{GS}	Gate – Source Voltage	V	-3
V _{GD}	Gate-Drain Voltage	V	-3.5
I _D	Drain Current	mA	I _{dss}
P _T	Total Power Dissipation ^[3]	mW	180
P _{in max}	RF Input Power	dBm	+10
T _{ch}	Channel Temperature	°C	150
T _{STG}	Storage Temperature	°C	-65 to 150

Thermal Resistance^[2,3]: $\theta_{ch-c} = 60^{\circ}\text{C}/\text{W}$

Notes:

1. Operation of this device above any one of these parameters may cause permanent damage.
2. Measured at P_{diss} = 15 mW and T_{ch} = 100°C.
3. Derate at 16.7 mW/°C for T_c > 139°C.

ATF-36077 Electrical Specifications,

T_C = 25°C, Z_O = 50 Ω, V_{ds} = 1.5 V, I_{ds} = 10 mA, (unless otherwise noted).

Symbol	Parameters and Test Conditions	Units	Min.	Typ.	Max.
NF	Noise Figure ^[1] f = 12.0 GHz	dB		0.5	0.6
G _A	Gain at NF ^[1] f = 12.0 GHz	dB	11.0	12.0	
g _m	Transconductance V _{DS} = 1.5 V, V _{GS} = 0 V	mS	50	55	
I _{dss}	Saturated Drain Current V _{DS} = 1.5 V, V _{GS} = 0 V	mA	15	25	45
V _{p 10%}	Pinch-off Voltage V _{DS} = 1.5 V, I _{DS} = 10% of I _{dss}	V	-1.0	-0.35	-0.15

Note:

1. Measured in a fixed tuned environment with Γ source = 0.54 at 156°; Γ load = 0.48 at 167°.

ATF-36077 Characterization Information,

T_C = 25°C, Z_O = 50 Ω, V_{ds} = 1.5 V, I_{ds} = 10 mA, (unless otherwise noted).

Symbol	Parameters and Test Conditions	Units	Typ.	
NF	Noise Figure (Tuned Circuit)	f = 4 GHz	0.3 ^[2]	
		f = 12 GHz	0.5	
G _A	Gain at Noise Figure (Tuned Circuit)	f = 4 GHz	17	
		f = 12 GHz	12	
S _{12 off}	Reverse Isolation f = 12 GHz, V _{DS} = 1.5 V, V _{GS} = -2 V	dB	14	
P _{1dB}	Output Power at 1 dB Gain Compression	f = 4 GHz	5	
		f = 12 GHz	5	
V _{GS 10 mA}	Gate to Source Voltage for I _{DS} = 10 mA	V _{DS} = 1.5 V	V	-0.2

Note:

2. See noise parameter table.

ATF-36077 Typical Scattering Parameters,

Common Source, $Z_O = 50 \Omega$, $V_{DS} = 1.5 \text{ V}$, $I_D = 10 \text{ mA}$

Freq. GHz	S_{11}		dB	S_{21}		dB	S_{12}		S_{22}	
	Mag.	Ang.		Mag.	Ang.		Mag.	Ang.	Mag.	Ang.
1.0	0.99	-17	14.00	5.010	163	-36.08	0.016	78	0.60	-14
2.0	0.97	-33	13.81	4.904	147	-30.33	0.030	66	0.59	-28
3.0	0.94	-49	13.53	4.745	132	-27.25	0.043	54	0.57	-41
4.0	0.90	-65	13.17	4.556	116	-25.32	0.054	43	0.55	-54
5.0	0.86	-79	12.78	4.357	102	-24.04	0.063	33	0.53	-66
6.0	0.82	-93	12.39	4.162	88	-23.17	0.069	24	0.50	-78
7.0	0.78	-107	12.00	3.981	75	-22.58	0.074	16	0.48	-89
8.0	0.75	-120	11.64	3.820	62	-22.17	0.078	8	0.46	-99
9.0	0.72	-133	11.32	3.682	49	-21.90	0.080	1	0.44	-109
10.0	0.69	-146	11.04	3.566	37	-21.71	0.082	-6	0.42	-119
11.0	0.66	-159	10.81	3.473	25	-21.57	0.083	-13	0.40	-129
12.0	0.63	-172	10.63	3.401	13	-21.44	0.085	-19	0.38	-139
13.0	0.61	175	10.50	3.349	1	-21.32	0.086	-25	0.37	-149
14.0	0.60	161	10.41	3.315	-12	-21.19	0.087	-32	0.35	-160
15.0	0.58	147	10.36	3.296	-24	-21.04	0.089	-39	0.33	-171
16.0	0.57	131	10.34	3.289	-37	-20.87	0.091	-47	0.31	177
17.0	0.56	114	10.34	3.289	-50	-20.69	0.092	-55	0.29	164
18.0	0.57	97	10.35	3.291	-64	-20.53	0.094	-65	0.26	148

ATF-36077 Typical "Off" Scattering Parameters,

Common Source, $Z_O = 50 \Omega$, $V_{DS} = 1.5 \text{ V}$, $I_D = 0 \text{ mA}$, $V_{GS} = -2 \text{ V}$

Freq. GHz	S_{11}		dB	S_{21}		dB	S_{12}		S_{22}	
	Mag.	Ang.		Mag.	Ang.		Mag.	Ang.	Mag.	Ang.
11.0	0.96	-139	-14.2	0.19	-43	-14.2	0.19	-43	0.97	-125
12.0	0.95	-152	-14.0	0.20	-56	-14.0	0.20	-56	0.97	-137
13.0	0.94	-166	-13.8	0.20	-69	-13.8	0.20	-68	0.96	-149

ATF-36077 Typical Noise Parameters,

Common Source, $Z_0 = 50 \Omega$, $V_{DS} = 1.5 \text{ V}$, $I_D = 10 \text{ mA}$

Freq. GHz	$F_{min}^{[1]}$ dB	Γ_{opt}		R_n/Z_0 -
		Mag.	Ang.	
1	0.30	0.95	12	0.40
2	0.30	0.90	25	0.20
4	0.30	0.81	51	0.17
6	0.30	0.73	76	0.13
8	0.37	0.66	102	0.09
10	0.44	0.60	129	0.05
12	0.50	0.54	156	0.03
14	0.56	0.48	-174	0.02
16	0.61	0.43	-139	0.05
18	0.65	0.39	-100	0.09


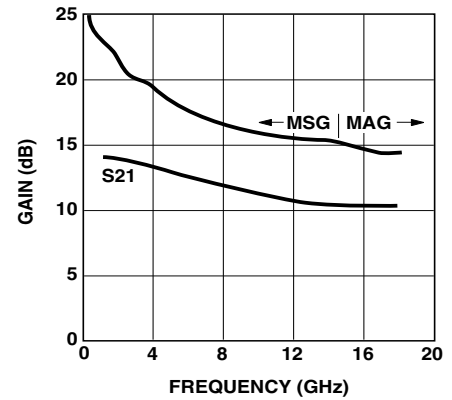


Figure 2. Maximum Available Gain, Maximum Stable Gain and Insertion Power Gain vs. Frequency. $V_{DS} = 1.5 \text{ V}$, $I_D = 10 \text{ mA}$.

Note:

- The F_{min} values at 2, 4, and 6 GHz have been adjusted to reflect expected circuit losses that will be encountered when matching to the optimum reflection coefficient (Γ_{opt}) at these frequencies. The theoretical F_{min} values for these frequencies are: 0.10 dB at 2 GHz, 0.20 dB at 4 GHz, and 0.29 dB at 6 GHz. Noise parameters are derived from associated s parameters, packaged device measurements at 12 GHz, and die level measurements from 6 to 18 GHz.

77 Package Dimensions

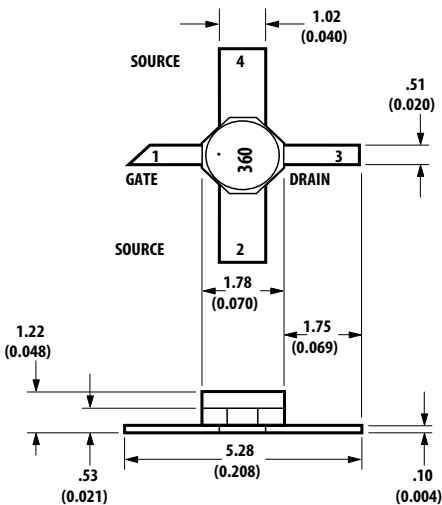

TYPICAL DIMENSIONS ARE IN MILLIMETERS (INCHES).

Part Number Ordering Information

Part Number	No. of Devices	Container
ATF-36077-TRI ^[2]	1000	7" Reel
ATF-36077-STR	100	strip

Note:

- For more information, see "Tape and Reel Packaging for Semiconductor Devices," in "Communications Components" Designer's Catalog.

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies Limited in the United States and other countries. Data subject to change. Copyright © 2005-2008 Avago Technologies Limited. All rights reserved. Obsoletes 5965-8726E AV02-1222EN - April 29, 2008

AVAGO
TECHNOLOGIES