

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



GaN HEMT Power Transistor 30W CW, 30 MHz - 3.5 GHz

Preliminary, 23 Aug 11

Features

- GaN depletion mode HEMT microwave transistor
- Common source configuration
- No internal matching
- Broadband Class AB operation
- Thermally enhanced Cu/Mo/Cu package
- RoHS Compliant
- +50V Typical Operation
- MTTF of 114 years (Channel Temperature < 200°C)

Applications

General purpose for pulsed or CW applications

- Commercial Wireless Infrastructure
- WCDMA, LTE, WIMAX
- Civilian and Military Radar
- Military and Commercial Communications
- Public Radio
- Industrial, Scientific and Medical
- SATCOM
- Instrumentation
- Avionics



Product Description

The MAGX-000035-030000 is a gold metalized unmatched Gallium Nitride (GaN) on Silicon Carbide RF power transistor suitable for a variety of RF power amplifier applications. Using state of the art wafer fabrication processes, these high performance transistors provide high gain, efficiency, bandwidth, ruggedness over multiple octave bandwidths for today's demanding application needs. The MAGX-000035-030000 is constructed using a thermally enhanced Cu/Mo/Cu flanged ceramic package which provides excellent thermal performance. High breakdown voltages allow for reliable and stable operation in extreme mismatched load conditions unparalleled with older semiconductor technologies.

Typical CW RF Performance

Freq. (MHz)	Pout (W Ave)	Gain (dB)	Eff (%)
30	58	40	80
100	44	32	65
500	43	27	66
1500	42	20	59
3000	35	13	55
3500	30	12	53

Ordering Information

MAGX-000035-030000 30W GaN Power Transistor
MAGX-000035-SB1PPR 1.5 GHz Evaluation Board

GaN HEMT Power Transistor
30W CW, 30 MHz - 3.5 GHz

Preliminary, 23 Aug 11

Absolute Maximum Ratings (1, 2, 3)	Limit
Supply Voltage (Vdd)	+65V
Supply Voltage (Vgg)	-8 to 0V
Supply Current (Id1)	1200 mA
Input Power (Pin)	+30 dBm
Junction/Channel Temp	200 °C
MTTF (T _J <200°C)	114 years
Continuous Power Dissipation (Pdiss) at 85 °C	27 W
Pulsed Power Dissipation (Pavg) at 85 °C	65 W
Thermal Resistance, (Tchannel = 200 °C), CW	4.2 °C/W
Thermal Resistance, (Tchannel = 200 °C), Pulsed 500uS, 10% Duty cycle	1.8 °C/W
Operating Temp	-40 to +95C
Storage Temp	-65 to +150C
ESD Min. - Machine Model (MM)	50 V
ESD Min. - Human Body Model (HBM)	>250 V

- (1) Operation of this device above any one of these parameters may cause permanent damage.
- (2) Channel temperature directly affects a device's MTTF. Channel temperature should be kept as low as possible to maximize lifetime.
- (3) For saturated performance it recommended that the sum of $(3 \cdot V_{dd} + \text{abs}(V_{gg})) < 175$


Parameter	Test Conditions	Symbol	Min	Typ	Max	Units
DC CHARACTERISTICS						
Drain-Source Leakage Current	V _{GS} = -8V, V _{DS} = 175V	I _{DS}	-	-	2.5	mA
Gate Threshold Voltage	V _{DS} = 5V, I _D = 6mA	V _{GS(th)}	-5	-3	-2	V
Forward Transconductance	V _{DS} = 5V, I _D = 1.5mA	G _M	1.0	-	-	S
DYNAMIC CHARACTERISTICS						
Input Capacitance	V _{DS} = 0v, V _{GS} = -8V, F = 1MHz	C _{ISS}	-	13.2	-	pF
Output Capacitance	V _{DS} = 50V, V _{GS} = -8V, F = 1MHz	C _{OSS}	-	5.6	-	pF
Reverse Transfer Capacitance	V _{DS} = 50V, V _{GS} = -8V, F = 1MHz	C _{RSS}	-	0.5	-	pF




Electrical Specifications: $T_c = 25 \pm 5^\circ\text{C}$ (Room Ambient)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Units
RF FUNCTIONAL TESTS <i>V_{dd}=50V, I_{dq}= 100 mA, single frequency optimized data</i>						
CW Output Power (P _{2dB}) 1 .5GHz	Pin = 1W Ave	P _{OUT}	30	42	-	W Ave
CW Output Power (P _{2dB}) 3 GHz	Pin = 1W Ave	P _{OUT}	30	31	-	W Ave
Small Signal Gain @ 1.5 GHz	P _{out} = 5W Ave	G _P	18	20		dB
Small Signal Gain @ 3 GHz	P _{out} = 5W Ave	G _P	13	13.6		dB
Drain Efficiency @ 3 GHz	Pin = 1W Ave	η_D	50	60		%
Load Mismatch Stability	Pin = 1W Ave	VSWR-S	5:1	-	-	-
Load Mismatch Tolerance	Pin = 1W Ave	VSWR-T	10:1	-	-	-

Test Fixture Impedance

F (MHz)	Z _{if-opt} (Ω)	Z _{of-opt} (Ω)
30	71 + j 255	24.9 - j 6.8
100	7.7 + j 66.6	22.14 - j 4.33
500	3.19 + j 13.8	21.8 + j 9.94
1500	1.4 + j 0.16	9.31 + j 9.34
3000	3.1 - j 9.96	3.32 + j 1.2
3500	TBD	TBD

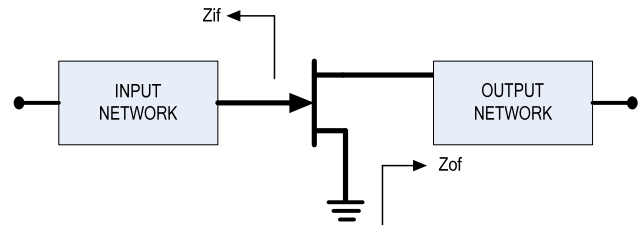

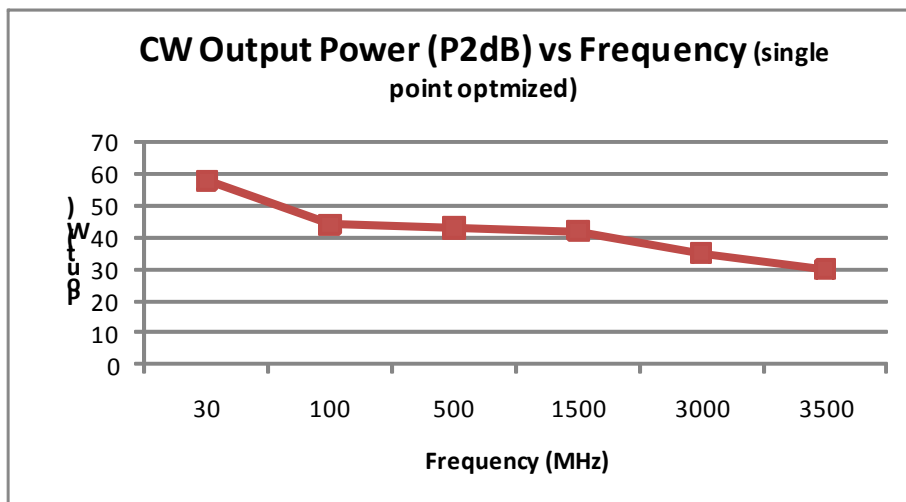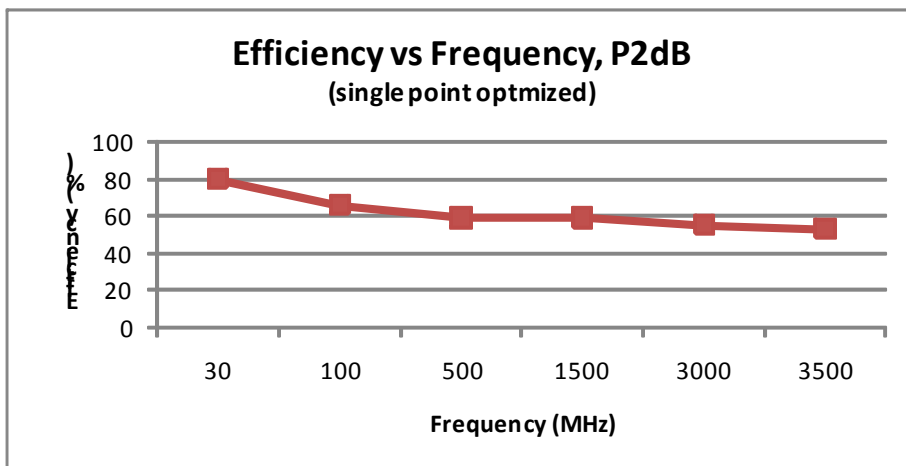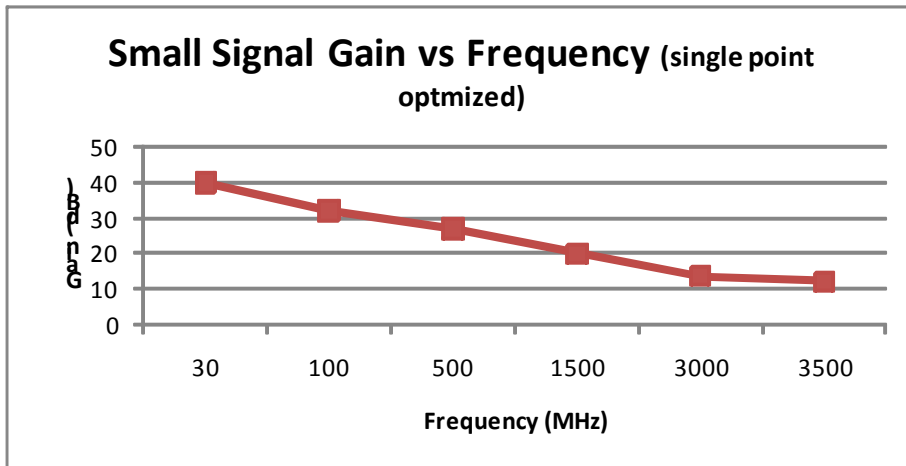



ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

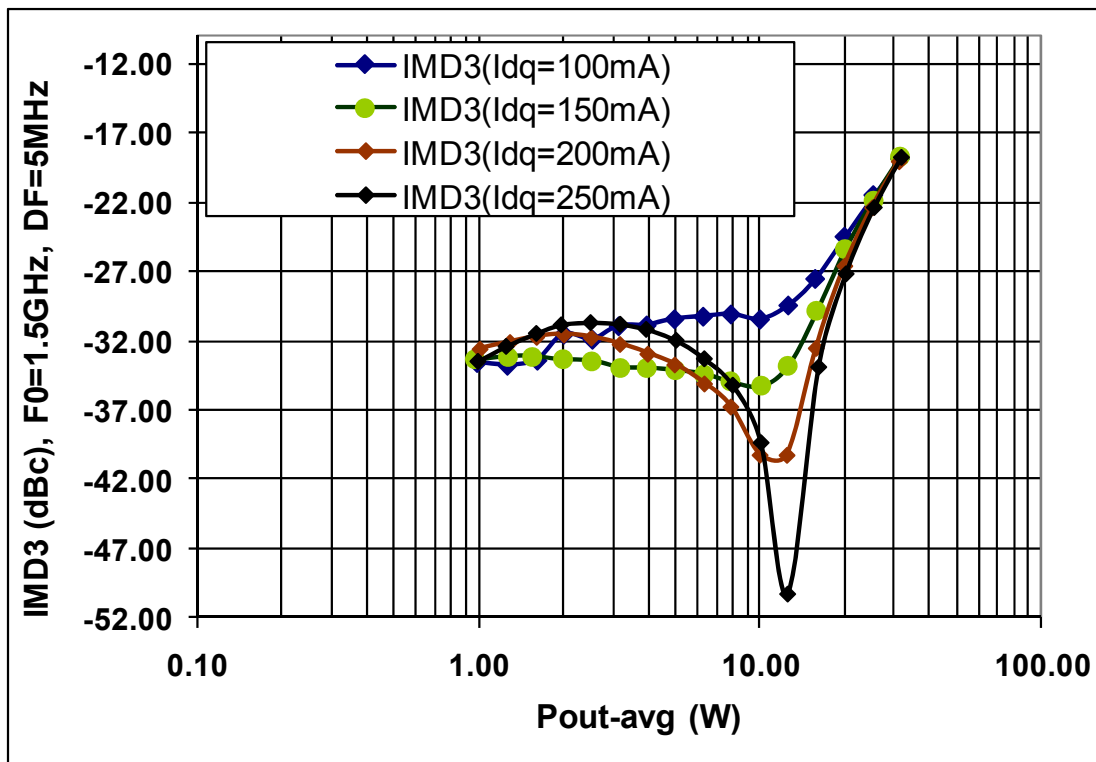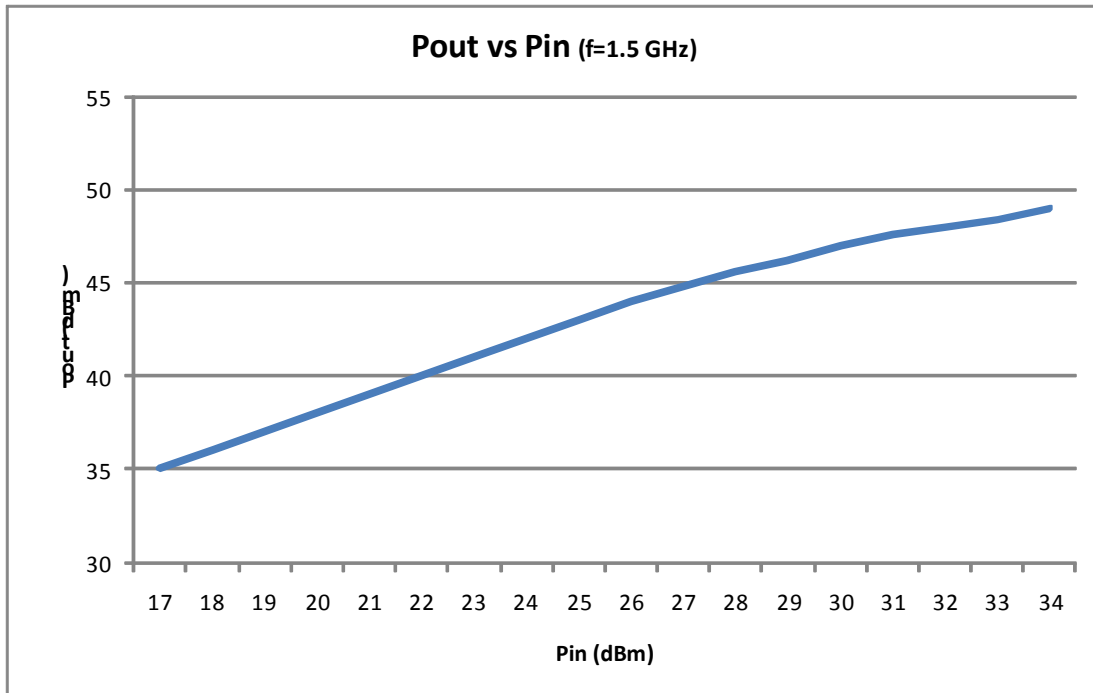


GaN HEMT Power Transistor
30W CW, 30 MHz - 3.5 GHz

Preliminary, 23 Aug 11

1.5 GHz Test Fixture Circuit Dimensions

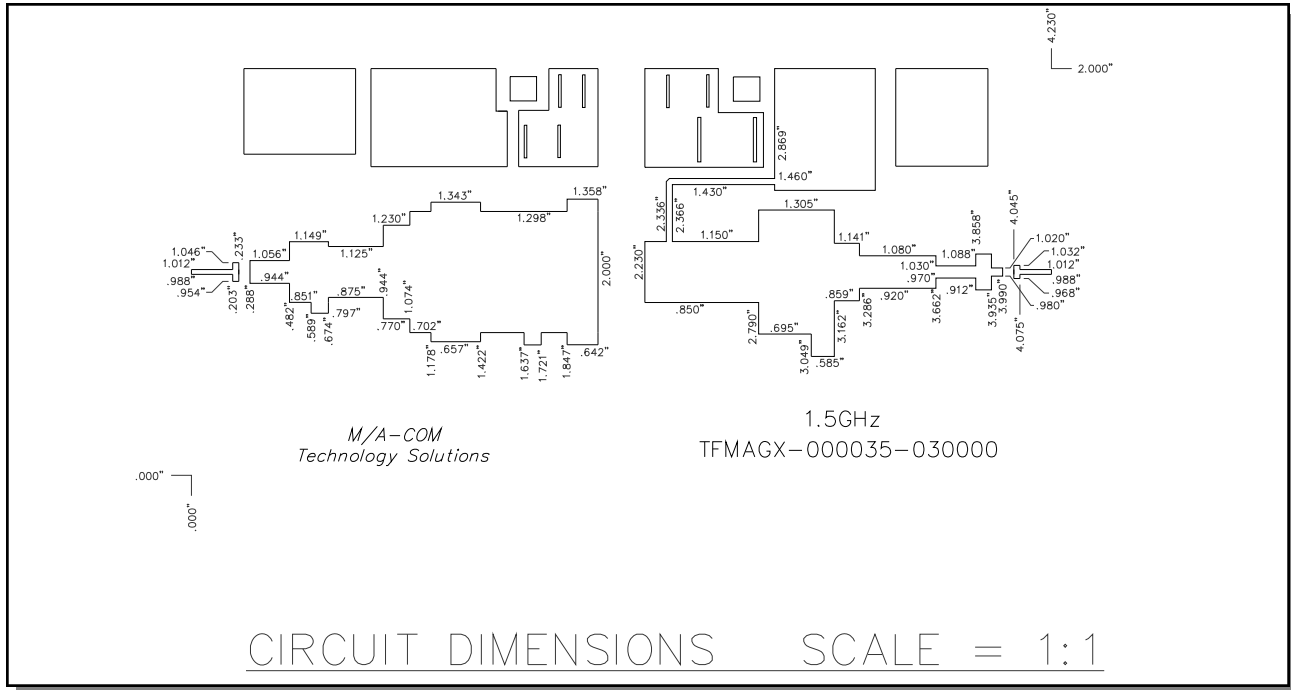

1.5 GHz Test Fixture Assembly

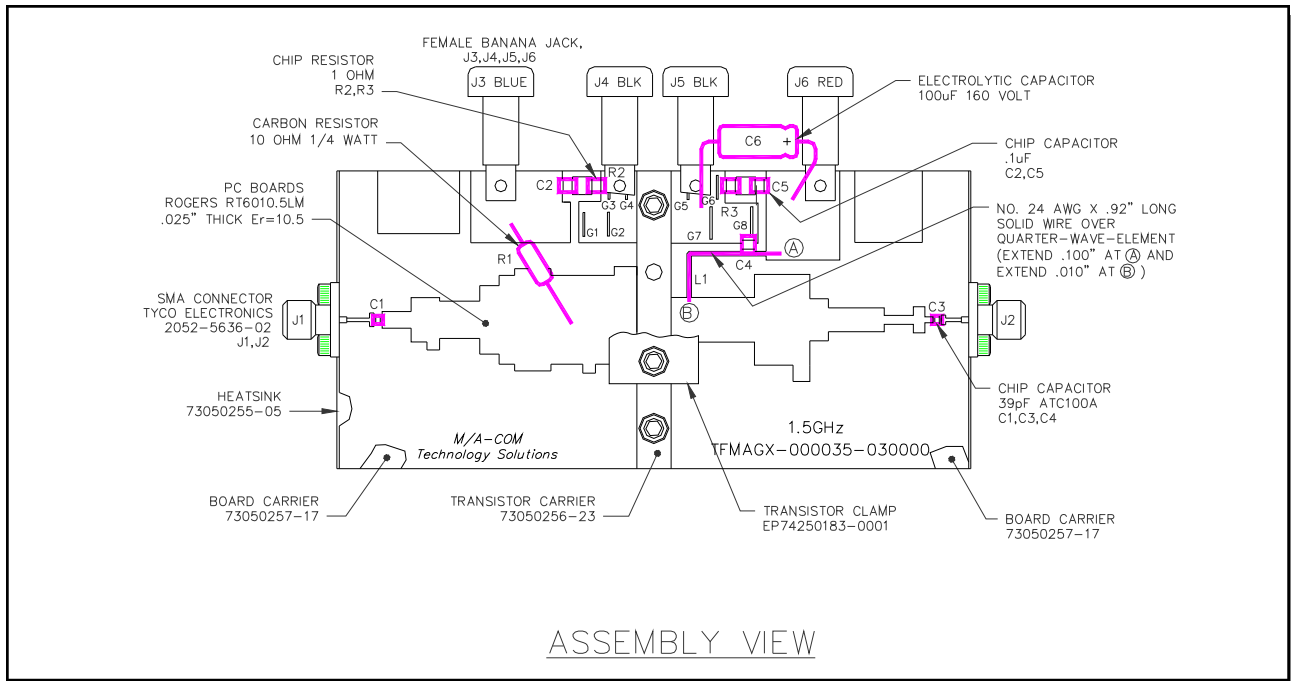

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


- North America Tel: 800.366.2266 / Fax: 978.366.2266
 - Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 - Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


GaN HEMT Power Transistor
30W CW, 30 MHz - 3.5 GHz

Preliminary, 23 Aug 11

3 GHz Test Fixture Circuit Dimensions

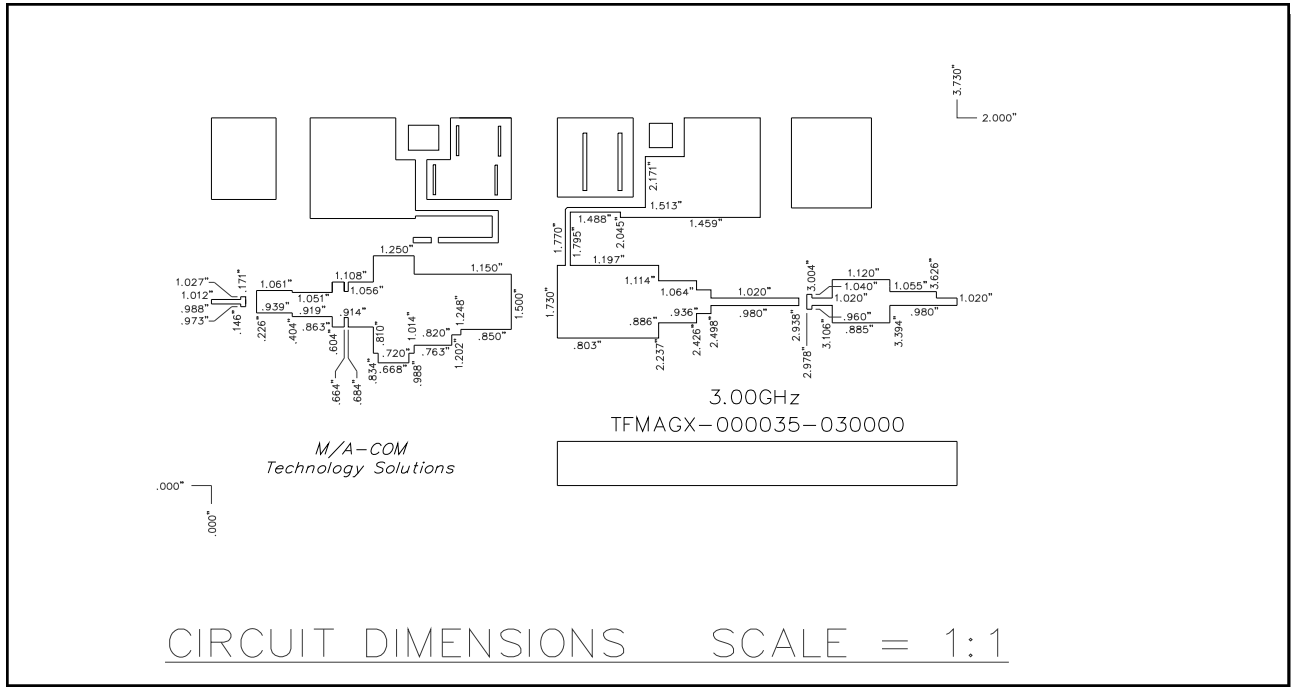

3 GHz Test Fixture Assembly

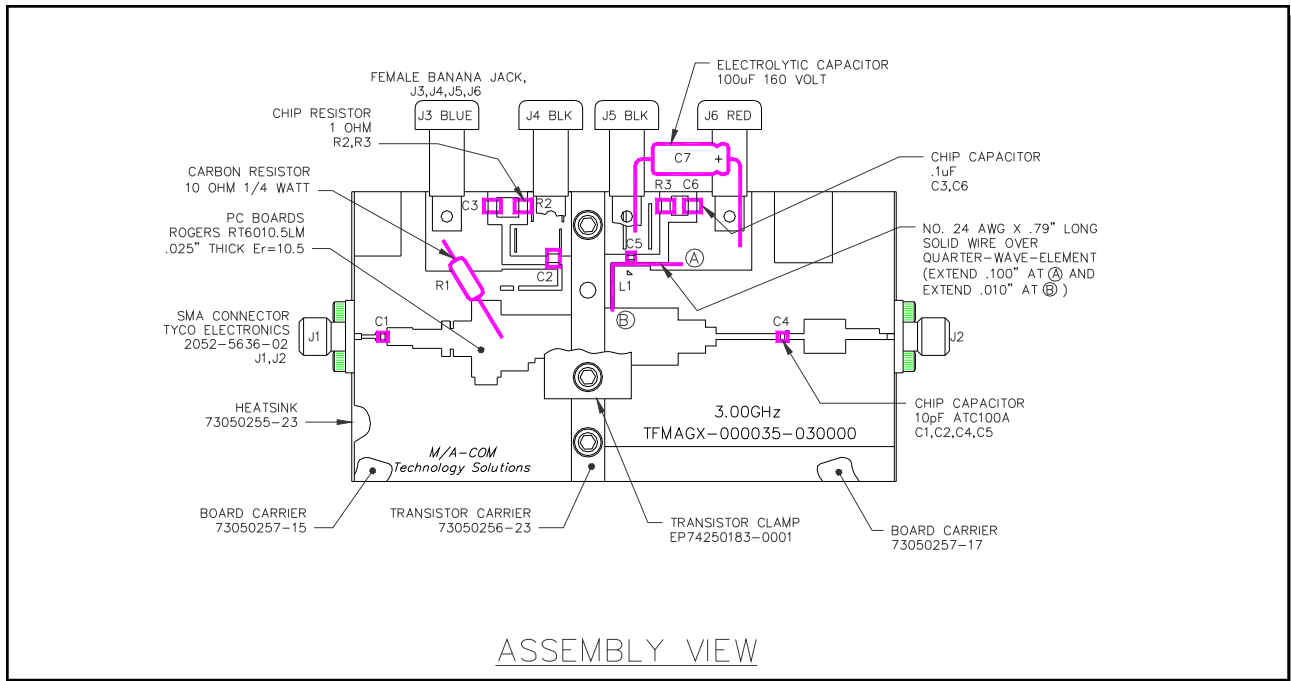

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.


PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Outline Drawings

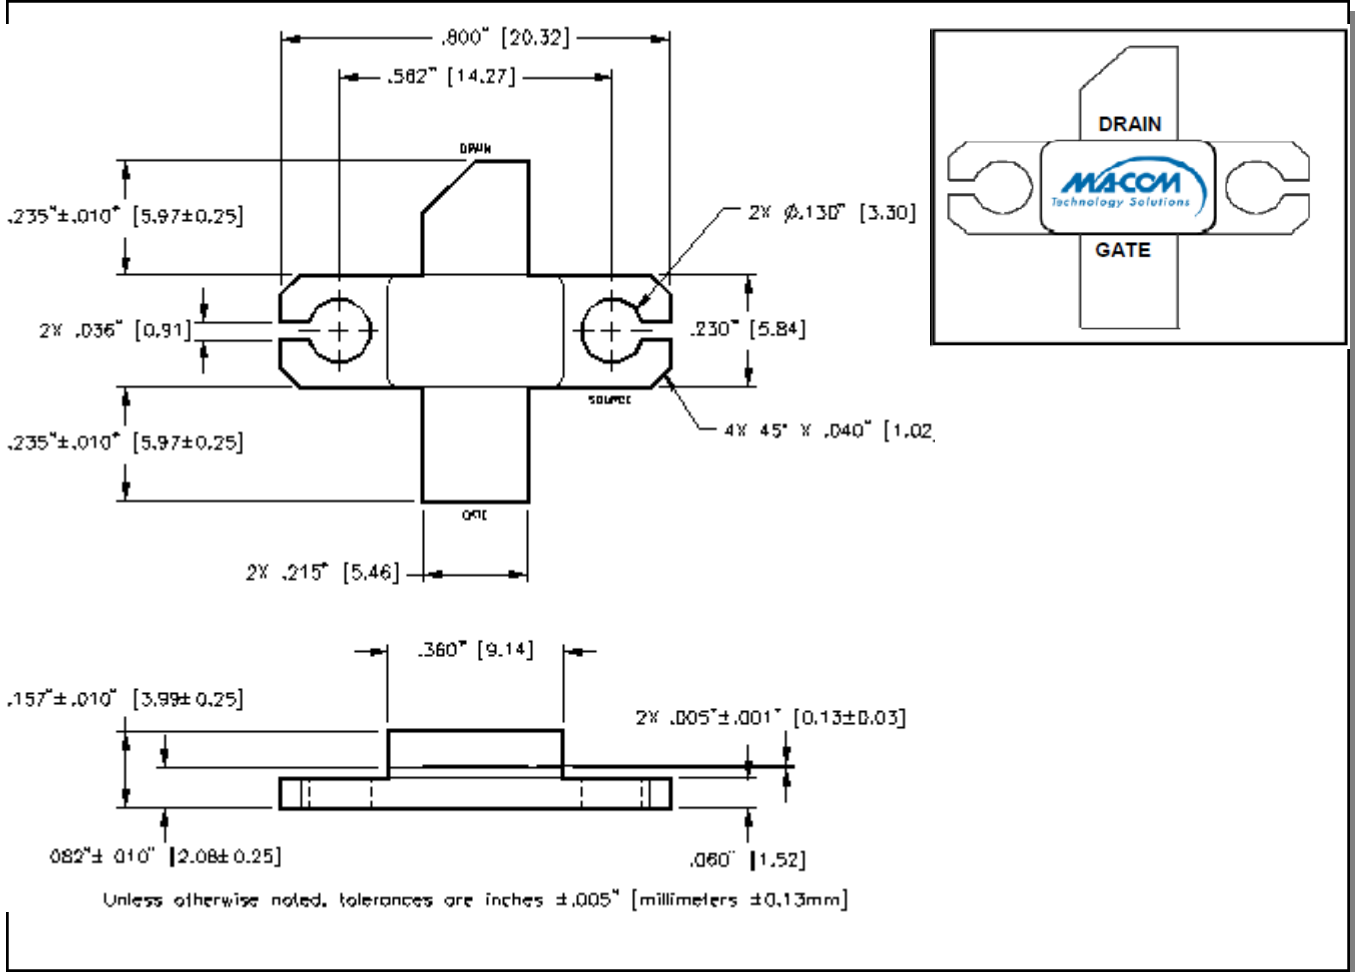

CORRECT DEVICE SEQUENCING

TURNING THE DEVICE ON

1. Set V_{GS} to the pinch-off (V_P), typically -5V
2. Turn on V_{DS} to nominal voltage (50V)
3. Increase V_{GS} until the I_{DS} current is reached
4. Apply RF power to desired level

TURNING THE DEVICE OFF

1. Turn the RF power off
2. Decrease V_{GS} down to V_P
3. Decrease V_{DS} down to 0V
4. Turn off V_{GS}