

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# ZX5T2E6

---

## 20V PNP LOW SAT MEDIUM POWER TRANSISTOR IN SOT23-6


---

### SUMMARY

$BV_{CEO} = -20V$  ;  $R_{SAT} = 31m\Omega$  ;  $I_C = -3.5A$

### DESCRIPTION

Packaged in the SOT23-6 outline this new 5<sup>th</sup> generation low saturation 20V PNP transistor offers extremely low on state losses making it ideal for use in DC-DC circuits and various driving and power management functions.




SOT23-6

### FEATURES

- 3.5 Amps continuous current
- Extremely low saturation voltage (-70mV max @ 1A/100mA )
- Up to 10 Amps peak current
- Very low saturation voltages

### APPLICATIONS

- DC - DC converters
- Battery charging
- Power switches
- Motor control
- Power management functions




### ORDERING INFORMATION

| DEVICE    | REEL SIZE | TAPE WIDTH   | QUANTITY PER REEL |
|-----------|-----------|--------------|-------------------|
| ZX5T2E6TA | 7"        | 8mm embossed | 3,000             |
| ZX5T2E6TC | 13"       | 8mm embossed | 10,000            |

### DEVICE MARKING

- 52

### PINOUT



TOP VIEW

# ZX5T2E6

## ABSOLUTE MAXIMUM RATINGS

| PARAMETER  | SYMBOL         | LIMIT        | UNIT                 |
|--|----------------|--------------|----------------------|
| Collector-base voltage                                       | $BV_{CBO}$     | -25          | V                    |
| Collector-emitter voltage                                    | $BV_{CEO}$     | -20          | V                    |
| Emitter-base voltage   | $BV_{EBO}$     | -7.5         | V                    |
| Continuous collector current                                 | $I_C$          | -3.5         | A                    |
| Peak pulse current   | $I_{CM}$       | -10          | A                    |
| Power dissipation at $T_A = 25^\circ\text{C}$ <sup>(a)</sup> | $P_D$          | 1.1          | W                    |
| Linear derating factor                                       |                | 8.8          | mW/ $^\circ\text{C}$ |
| Power dissipation at $T_A = 25^\circ\text{C}$ <sup>(b)</sup> | $P_D$          | 1.7          | W                    |
| Linear derating factor                                       |                | 13.6         | mW/ $^\circ\text{C}$ |
| Operating and storage temperature range                      | $T_J, T_{stg}$ | -55 to + 150 | $^\circ\text{C}$     |

## THERMAL RESISTANCE


| PARAMETER                          | SYMBOL          | VALUE | UNIT                      |
|------------------------------------|-----------------|-------|---------------------------|
| Junction to ambient <sup>(a)</sup> | $R_{\theta JA}$ | 113   | $^\circ\text{C}/\text{W}$ |
| Junction to ambient <sup>(b)</sup> | $R_{\theta JC}$ | 73    | $^\circ\text{C}/\text{W}$ |

### NOTES

- (a) For a device surface mounted on 25mm x 25mm x 0.6mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions.  
(b) As above measured at  $t < 5$  seconds.

# ZX5T2E6

## CHARACTERISTICS

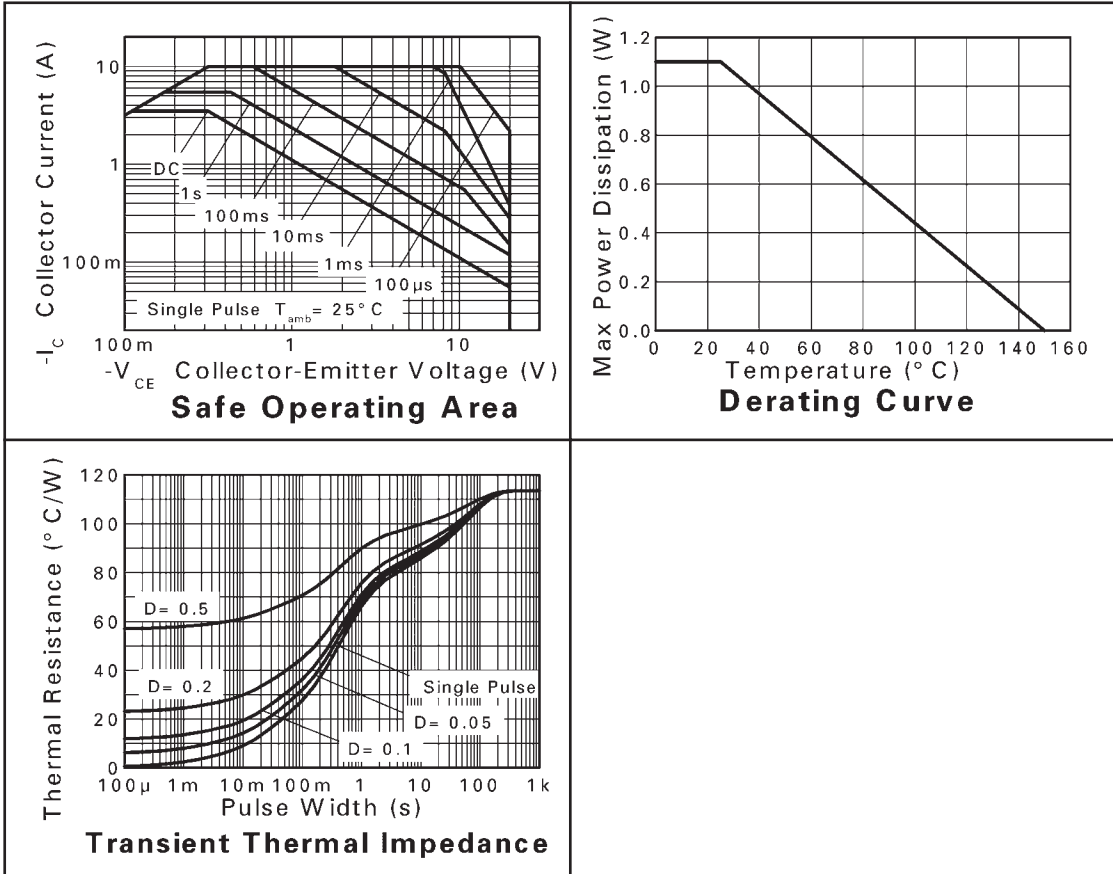

# ZX5T2E6

## ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ unless otherwise stated)


| PARAMETER                             | SYMBOL        | MIN. | TYP.  | MAX. | UNIT | CONDITIONS                                  |
|---------------------------------------|---------------|------|-------|------|------|---|
| Collector-base breakdown voltage      | $BV_{CBO}$    | -25  | -49   |      | V    | $I_C = -100\mu A$                           |
| Collector-emitter breakdown voltage   | $BV_{CEO}$    | -20  | -43   |      | V    | $I_C = -10mA$ *                             |
| Emitter-base breakdown voltage        | $BV_{EBO}$    | -7.5 | -8.4  |      | V    | $I_E = -100\mu A$                           |
| Collector cut-off current             | $I_{CBO}$     |      |       | -100 | nA   | $V_{CB} = -20V$                             |
| Collector cut-off current             | $I_{CES}$     |      |       | -100 | nA   | $V_{CB} = -20V$                             |
| Emitter cut-off current               | $I_{EBO}$     |      |       | -100 | nA   | $V_{EB} = -6V$                              |
| Collector-emitter saturation voltage  | $V_{CE(SAT)}$ |      | -10   | -15  | mV   | $I_C = -0.1A, I_B = -10mA$ *                |
|                                       |               |      | -100  | -140 | mV   | $I_C = -1A, I_B = -10mA$ *                  |
|                                       |               |      | -110  | -130 | mV   | $I_C = -3.5A, I_B = -350mA$ *               |
| Base-emitter saturation voltage       | $V_{BE(SAT)}$ |      | -0.96 | -1.1 | V    | $I_C = -3.5A, I_B = -350mA$ *               |
| Base-emitter turn-on voltage          | $V_{BE(ON)}$  |      | -0.8  | -0.9 | V    | $I_C = -3.5A, V_{CE} = -2V$ *               |
| Static forward current transfer ratio | $h_{FE}$      | 300  | 575   |      |      | $I_C = -10mA, V_{CE} = -2V$ *               |
|                                       |               | 300  | 450   | 900  |      | $I_C = -1A, V_{CE} = -2V$ *                 |
|                                       |               | 150  | 285   |      |      | $I_C = -3.5A, V_{CE} = -2V$ *               |
|                                       |               | 10   | 40    |      |      | $I_C = -10A, V_{CE} = -2V$ *                |
| Transition frequency                  | $f_T$         |      | 110   |      |      | $I_C = -50mA, V_{CE} = -10V$<br>$f = 50MHz$ |
| Output capacitance                    | $C_{OBO}$     |      | 45    |      | pF   | $V_{CB} = -10V, f = 1MHz$ *                 |
| Switching times                       | $t_{ON}$      |      | 90    |      | ns   | $I_C = -2A, V_{CC} = -10V,$                 |
|                                       | $t_{OFF}$     |      | 325   |      | ns   | $I_{B1} = I_{B2} = -40mA$                   |

### NOTES

\* Measured under pulsed conditions. Pulse width  $\leq 300\mu s$ ; duty cycle  $\leq 2\%$ .


# ZX5T2E6

## TYPICAL CHARACTERISTICS

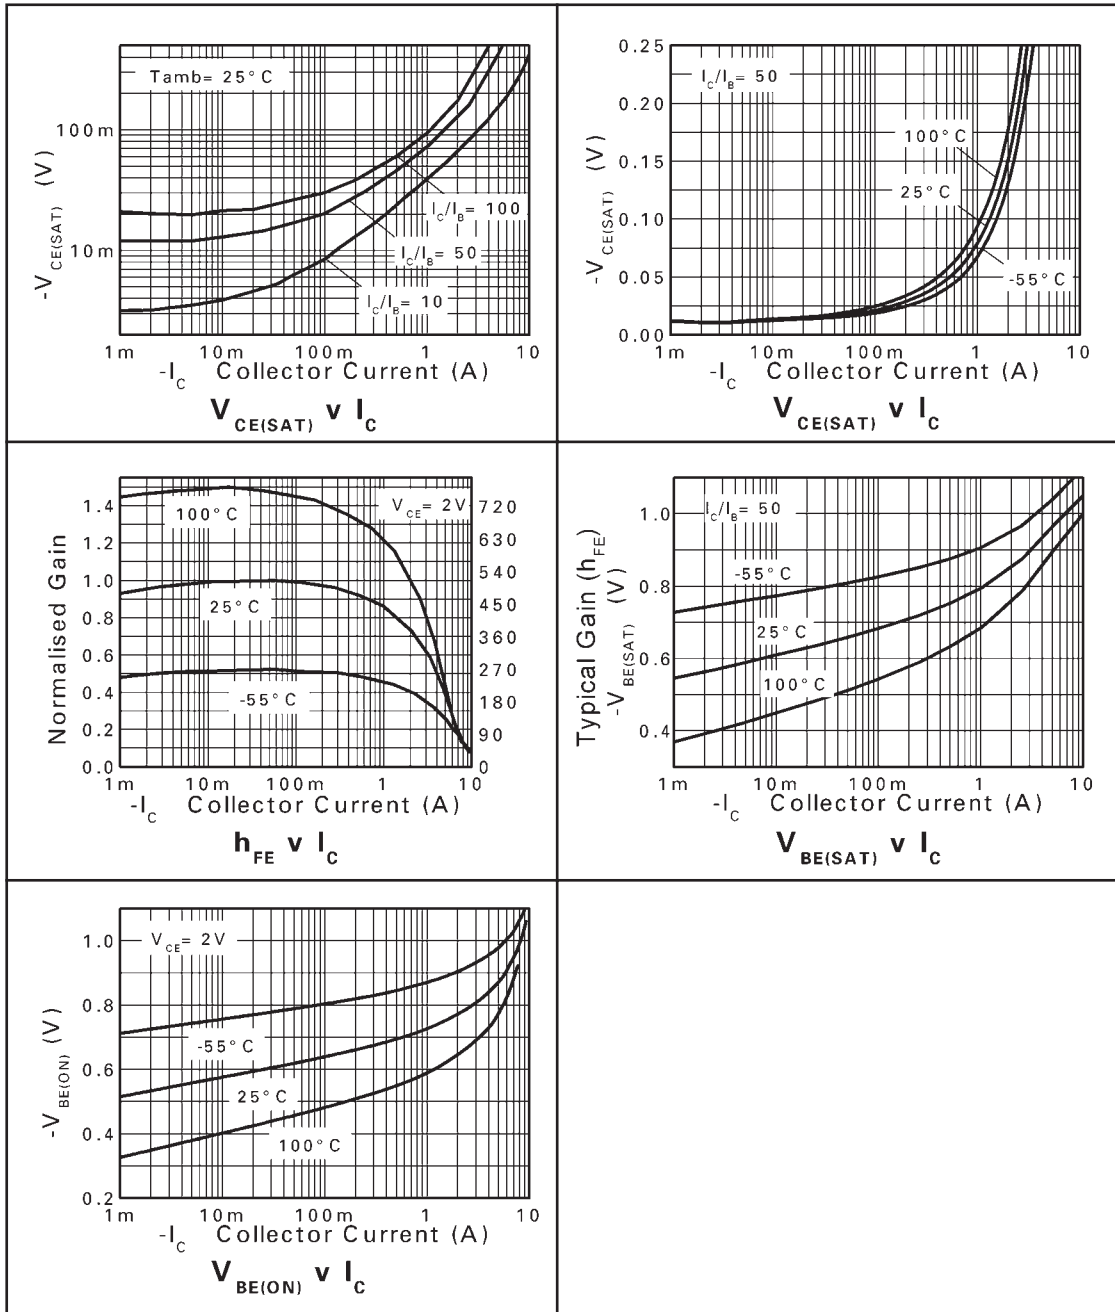


# ZX5T2E6

## PACKAGE OUTLINE

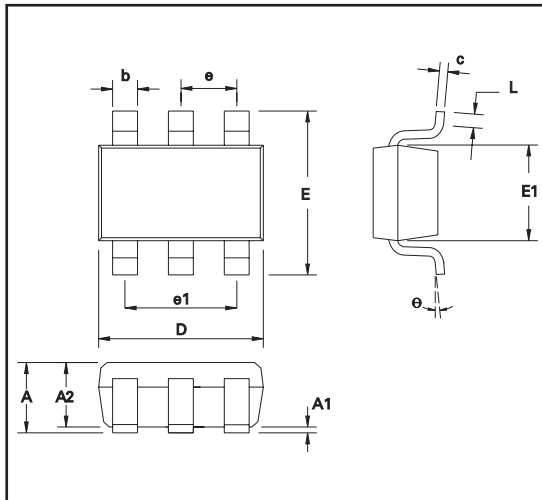

## PAD LAYOUT DETAILS

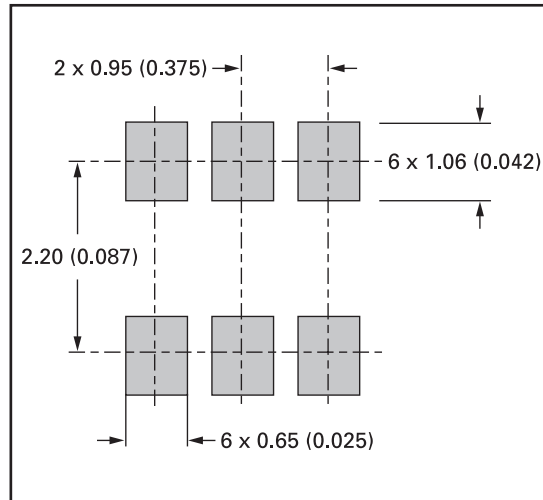

Controlling dimensions are in millimeters. Approximate conversions are given in inches

## PACKAGE DIMENSIONS

| DIM | Millimeters |      | Inches |       | DIM | Millimeters |      | Inches    |       |
|-----|-------------|------|--------|-------|-----|-------------|------|-----------|-------|
|     | Min         | Max  | Min    | Max   |     | Min         | Max  | Min       | Max   |
| A   | 0.90        | 1.45 | 0.035  | 0.057 | E   | 2.20        | 3.20 | 0.0866    | 0.118 |
| A1  | 0.00        | 0.15 | 0.00   | 0.006 | E1  | 1.30        | 1.80 | 0.0511    | 0.071 |
| A2  | 0.90        | 1.30 | 0.035  | 0.051 | L   | 0.10        | 0.60 | 0.004     | 0.024 |
| b   | 0.20        | 0.50 | 0.008  | 0.020 | e   | 0.95 REF    |      | 0.037 REF |       |
| C   | 0.09        | 0.26 | 0.003  | 0.010 | e1  | 1.90 REF    |      | 0.075 REF |       |
| D   | 2.70        | 3.10 | 0.106  | 0.122 | θ   | 0°          | 30°  | 0°        | 30°   |

©Zetex Semiconductors plc 2004

| Europe  | Americas  | Asia Pacific   | Corporate Headquarters   |
|---|---|--|--|
| Zetex GmbH<br>Streitfeldstraße 19<br>D-81673 München<br>Germany                     | Zetex Inc<br>700 Veterans Memorial Hwy<br>Hauppauge, NY 11788<br>USA        | Zetex (Asia) Ltd<br>3701-04 Metroplaza Tower 1<br>Hing Fong Road, Kwai Fong<br>Hong Kong | Zetex Semiconductors plc<br>Zetex Technology Park, Chadderton<br>Oldham, OL9 9LL<br>United Kingdom |
| Telephone: (49) 89 45 49 49 0<br>Fax: (49) 89 45 49 49 49<br>europe.sales@zetex.com | Telephone: (1) 631 360 2222<br>Fax: (1) 631 360 8222<br>usa.sales@zetex.com | Telephone: (852) 26100 611<br>Fax: (852) 24250 494<br>asia.sales@zetex.com               | Telephone: (44) 161 622 4444<br>Fax: (44) 161 622 4446<br>hq@zetex.com                             |

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to [www.zetex.com](http://www.zetex.com)



ISSUE 1 - MAY 2004