

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# Dialight


## 550 SERIES

### 5mm LED CBI®

### Circuit Board Indicator Sloped Back Housing with Standoffs


## FEATURES / BENEFITS

- ▲ Multiple CBIs form horizontal LED arrays on 6.35mm (0.250") center-lines.
- ▲ High contrast, UL 94 V-0 rated, black housing
- ▲ Oxygen index: 32%
- ▲ Polymer content: PBT, 0.206 g
- ▲ Housing stand-offs facilitate PCB cleaning
- ▲ Solderability per MIL-STD-202F, method 208F
- ▲ LEDs are safe for direct viewing per IEC 825-1, EN-60825-1
- ▲ Compatible with: 550-xx07 Dual Block and 550-xx07-004 Quad Block

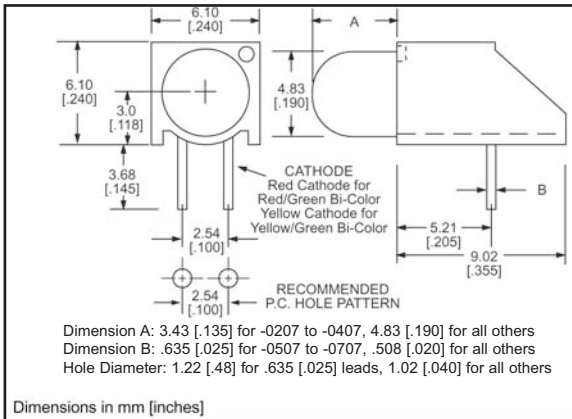

Standard Polarity shown in drawing: Cathode right

### PART NUMBER ORDERING CODE

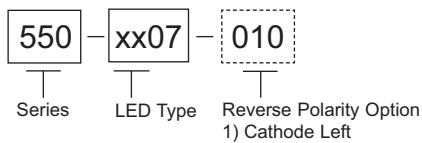

Contact factory for information on custom color combinations.

#### TOLERANCE NOTE: As noted, otherwise:

- LED Protrusion:  $\pm 0.41\text{mm}$  [ $\pm 0.016$ ]
- CBI Housing:  $+0.20\text{mm}$  [ $\pm 0.008$ ]

To order any of the 550-xx07 part numbers with Reverse Polarity (Cathode Left), please add -010 to the part numbers shown above.

PART NUMBER	COLOR
<b>GENERAL PURPOSE</b>	
550-0207	Green
550-0307	Yellow
550-0407	Red
<b>INTEGRAL RESISTOR</b>	
550-0507	Red, 5V
550-0707	Green, 5V
550-0807	Yellow, 5V
<b>LOW CURRENT</b>	
550-1107	Red
550-1207	Yellow
550-1307	Green
<b>HIGH EFFICIENCY</b>	
550-2207	Green
550-2307	Yellow
550-2407	Red
550-2507	Orange
<b>BI-COLOR</b>	
550-3007	Red/Green
550-3107	Yellow/Green
<b>SUPER BRIGHT, DIFFUSED</b>	
550-5107	Red
550-5207	Green
550-5307	Yellow
<b>SUPER BRIGHT, WATER CLEAR (Non-tinted, Non-diffused)</b>	
550-5507	Red
550-5607	Green
550-5707	Yellow



Dialight Corporation  
 1501 Route 34 South • Farmingdale, NJ 07727 USA  
 Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com

a Roxboro Group Company

MDEA550X001\_A