

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



Metallized Polypropylene Film Capacitors

+105°C Epoxy Dipped, Radial Lead


FEATURES

Small size - Low ESR - Good Pulse Capabilities - Stable with Frequency and Temperature

APPLICATIONS

General Purpose - Switching Power Supplies - Blocking - Coupling - AC Applications (Not across the Line)

Operating Temperature Range	-55°C to +105°C					
Capacitance Tolerance	±10% at 1 kHz, 25°C ±5% optional					
Peak, AC voltage (50/60 Hz)	WVDC	100	250	400	630	1000
	VAC	63	200	220	250	300
For T>+85°C, The voltage must be decreased by 1.5% per °C						
Dissipation Factor (MAX) 25°C	Frequency (kHz)	C≤0.1uF		0.1uF<C≤1uF		1uF<C≤3uF
	1	0.1%		0.1%		0.1%
	100	0.4%		0.7%		1.2%
Insulation Resistance @25°C (<70% RH) for 1 minute at 100VDC applied	Capacitance	Insulation Resistance				
	≤0.33μF	30000 MΩ				
	>0.33μF	10000 MΩxμF				
Load Life	2000 Hours, +85C with 125% of rated voltage					
	Capacitance Change	≤3% of initially measured value				
	Dissipation Factor	≤0.001 at 1kHz and 25°C				
	Insulation Resistance	≥50% of maximum specified value				
Damp Heat test	56 days at 40°C with 90 to 95%RH, +40°C and no voltage applied					
	Capacitance Change	≤3% of initially measured value				
	Dissipation Factor	≤0.001 at 1kHz and 25°C				
	Insulation Resistance	≥50% of maximum specified value				
Self Inductance	<1 nano-Henry per mm of body length and lead length					
Capacitance Drift Factor	<0.5% after 2 years at 40°C					
Capacitance Temperature Coefficient	-200 ppm/°C, ±100ppm/°C					
Dielectric Strength	Terminal to Terminal					
	200% of rated VDC or VAC applied for 10 Seconds and 25°C					
Dielectric	Polypropylene					
Construction	Metallized film					
Coating	Flame Retardant epoxy resin (UL94V0)					
Leads	Lead free tinned copper leads					

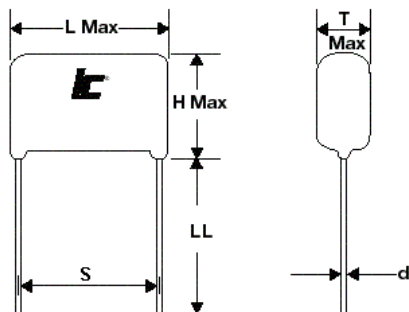

L MAX	12	18.5	26	31
S+1.0	10	15	22.5	27.5
G MAX	1.5	1.5	1.5	1.5
d+0.05	0.6	0.8	0.8	0.8

MPR

Metallized Polypropylene
Epoxy Dipped Radial Lead

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims LxHxT (mm)	S (MM)	d (MM)
0.01	400	103MPR400K	350	13x9x5	10	0.6
0.01	630	103MPR630K	420	13x10x6	10	0.6
0.015	250	153MPR250K	220	13x9x5	10	0.6
0.015	400	153MPR400K	350	13x9.5x5	10	0.6
0.015	630	153MPR630K	420	13x11x7	10	0.6
0.022	250	223MPR250K	220	13x9x5	10	0.6
0.022	400	223MPR400K	350	13x10.5x5.5	10	0.6
0.022	630	223MPR630K	420	13x12.5x8.5	10	0.6
0.033	250	333MPR250K	220	13x9x5.5	10	0.6
0.033	400	333MPR400K	350	13x11x6.5	10	0.6
0.033	630	333MPR630K	400	18x11.5x7.5	15	0.8
0.047	250	473MPR250K	220	13x9.5x5.5	10	0.6
0.047	400	473MPR400K	350	13x11x7.5	10	0.6
0.047	630	473MPR630K	400	18x13.5x8.5	15	0.8
0.068	250	683MPR250K	220	13x10.5x6	10	0.6
0.068	400	683MPR400K	300	18x12x6.5	15	0.8
0.068	630	683MPR630K	400	18x15.5x9.5	15	0.8
0.1	250	104MPR250K	220	13x11x7	10	0.6
0.1	400	104MPR400K	300	18x12.5x7.5	15	0.8
0.1	630	104MPR630K	230	26x15x10	22.5	0.8

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims LxHxT (mm)	S (MM)	d (MM)
0.15	250	154MPR250K	200	18x11x7	15	0.8
0.15	400	154MPR400K	185	26x13x7.5	22.5	0.8
0.15	630	154MPR630K	230	26x17x11	22.5	0.8
0.22	250	224MPR250K	200	18x12.5x7.5	15	0.8
0.22	400	224MPR400K	165	26x14x8.5	22.5	0.8
0.22	630	224MPR630K	180	31x17.5x10.5	27.5	0.8
0.22	1000	224MPR102K	135	31x18x9	27.5	0.8
0.33	250	334MPR250K	200	18x13x8.5	15	0.8
0.33	400	334MPR400K	165	26x15x10	22.5	0.8
0.33	630	334MPR630K	180	31x21.5x13	27.5	0.8
0.47	100	474MPR100K	100	18.5x14x8	15	0.8
0.47	250	474MPR250K	110	26x14x8.5	22.5	0.8
0.47	400	474MPR400K	150	31x16.5x10.5	27.5	0.8
0.47	630	474MPR630K	180	31x24.5x15.5	27.5	0.8
0.47	1000	474MPR102K	135	31x22x13	27.5	0.8
0.68	250	684MPR250K	115	26x15x9.5	22.5	0.8
1	250	105MPR250K	110	26x16x12	22.5	0.8
1	400	105MPR400K	150	31x22x15	27.5	0.8
1.5	250	155MPR250K	100	31x18x13	27.5	0.8
2.2	250	225MPR250K	100	31x21x15	27.5	0.8