

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



## Metallized Polypropylene Film Capacitors

+105°C Epoxy Dipped, Radial Lead


### FEATURES

Small size - Low ESR - Good Pulse Capabilities - Stable with Frequency and Temperature

### APPLICATIONS

General Purpose - Switching Power Supplies - Blocking - Coupling - AC Applications ( Not across the Line)

<b>Operating Temperature Range</b>	<b>-55°C to +105°C</b>					
<b>Capacitance Tolerance</b>	±10% at 1 kHz, 25°C ±5% optional					
<b>Peak, AC voltage (50/60 Hz)</b>	<b>WVDC</b>	<b>100</b>	<b>250</b>	<b>400</b>	<b>630</b>	<b>1000</b>
	<b>VAC</b>	63	200	220	250	300
For T>+85°C, The voltage must be decreased by 1.5% per °C						
<b>Dissipation Factor (MAX) 25°C</b>	<b>Frequency (kHz)</b>	<b>C≤0.1uF</b>		<b>0.1uF&lt;C≤1uF</b>		<b>1uF&lt;C≤3uF</b>
	<b>1</b>	0.1%		0.1%		0.1%
	<b>100</b>	0.4%		0.7%		1.2%
<b>Insulation Resistance @25°C (&lt;70% RH) for 1 minute at 100VDC applied</b>	<b>Capacitance</b>	<b>Insulation Resistance</b>				
	<b>≤0.33μF</b>	30000 MΩ				
	<b>&gt;0.33μF</b>	10000 MΩxμF				
<b>Load Life</b>	<b>2000 Hours, +85C with 125% of rated voltage</b>					
	<b>Capacitance Change</b>	≤3% of initially measured value				
	<b>Dissipation Factor</b>	≤0.001 at 1kHz and 25°C				
	<b>Insulation Resistance</b>	≥50% of maximum specified value				
<b>Damp Heat test</b>	<b>56 days at 40°C with 90 to 95%RH, +40°C and no voltage applied</b>					
	<b>Capacitance Change</b>	≤3% of initially measured value				
	<b>Dissipation Factor</b>	≤0.001 at 1kHz and 25°C				
	<b>Insulation Resistance</b>	≥50% of maximum specified value				
<b>Self Inductance</b>	<1 nano-Henry per mm of body length and lead length					
<b>Capacitance Drift Factor</b>	<0.5% after 2 years at 40°C					
<b>Capacitance Temperature Coefficient</b>	-200 ppm/°C, ±100ppm/°C					
<b>Dielectric Strength</b>	<b>Terminal to Terminal</b>					
	200% of rated VDC or VAC applied for 10 Seconds and 25°C					
<b>Dielectric</b>	Polypropylene					
<b>Construction</b>	Metallized film					
<b>Coating</b>	Flame Retardant epoxy resin (UL94V0)					
<b>Leads</b>	Lead free tinned copper leads					

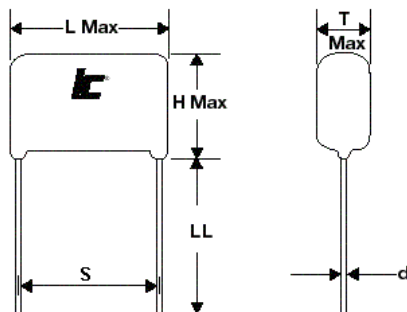

L MAX	12	18.5	26	31
S+1.0	10	15	22.5	27.5
G MAX	1.5	1.5	1.5	1.5
d+0.05	0.6	0.8	0.8	0.8

# MPR

Metallized Polypropylene  
Epoxy Dipped Radial Lead

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims LxHxT (mm)	S (MM)	d (MM)
0.01	400	<a href="#">103MPR400K</a>	350	13x9x5	10	0.6
0.01	630	<a href="#">103MPR630K</a>	420	13x10x6	10	0.6
0.015	250	<a href="#">153MPR250K</a>	220	13x9x5	10	0.6
0.015	400	<a href="#">153MPR400K</a>	350	13x9.5x5	10	0.6
0.015	630	<a href="#">153MPR630K</a>	420	13x11x7	10	0.6
0.022	250	<a href="#">223MPR250K</a>	220	13x9x5	10	0.6
0.022	400	<a href="#">223MPR400K</a>	350	13x10.5x5.5	10	0.6
0.022	630	<a href="#">223MPR630K</a>	420	13x12.5x8.5	10	0.6
0.033	250	<a href="#">333MPR250K</a>	220	13x9x5.5	10	0.6
0.033	400	<a href="#">333MPR400K</a>	350	13x11x6.5	10	0.6
0.033	630	<a href="#">333MPR630K</a>	400	18x11.5x7.5	15	0.8
0.047	250	<a href="#">473MPR250K</a>	220	13x9.5x5.5	10	0.6
0.047	400	<a href="#">473MPR400K</a>	350	13x11x7.5	10	0.6
0.047	630	<a href="#">473MPR630K</a>	400	18x13.5x8.5	15	0.8
0.068	250	<a href="#">683MPR250K</a>	220	13x10.5x6	10	0.6
0.068	400	<a href="#">683MPR400K</a>	300	18x12x6.5	15	0.8
0.068	630	<a href="#">683MPR630K</a>	400	18x15.5x9.5	15	0.8
0.1	250	<a href="#">104MPR250K</a>	220	13x11x7	10	0.6
0.1	400	<a href="#">104MPR400K</a>	300	18x12.5x7.5	15	0.8
0.1	630	<a href="#">104MPR630K</a>	230	26x15x10	22.5	0.8

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims LxHxT (mm)	S (MM)	d (MM)
0.15	250	<a href="#">154MPR250K</a>	200	18x11x7	15	0.8
0.15	400	<a href="#">154MPR400K</a>	185	26x13x7.5	22.5	0.8
0.15	630	<a href="#">154MPR630K</a>	230	26x17x11	22.5	0.8
0.22	250	<a href="#">224MPR250K</a>	200	18x12.5x7.5	15	0.8
0.22	400	<a href="#">224MPR400K</a>	165	26x14x8.5	22.5	0.8
0.22	630	<a href="#">224MPR630K</a>	180	31x17.5x10.5	27.5	0.8
0.22	1000	<a href="#">224MPR102K</a>	135	31x18x9	27.5	0.8
0.33	250	<a href="#">334MPR250K</a>	200	18x13x8.5	15	0.8
0.33	400	<a href="#">334MPR400K</a>	165	26x15x10	22.5	0.8
0.33	630	<a href="#">334MPR630K</a>	180	31x21.5x13	27.5	0.8
0.47	100	<a href="#">474MPR100K</a>	100	18.5x14x8	15	0.8
0.47	250	<a href="#">474MPR250K</a>	110	26x14x8.5	22.5	0.8
0.47	400	<a href="#">474MPR400K</a>	150	31x16.5x10.5	27.5	0.8
0.47	630	<a href="#">474MPR630K</a>	180	31x24.5x15.5	27.5	0.8
0.47	1000	<a href="#">474MPR102K</a>	135	31x22x13	27.5	0.8
0.68	250	<a href="#">684MPR250K</a>	115	26x15x9.5	22.5	0.8
1	250	<a href="#">105MPR250K</a>	110	26x16x12	22.5	0.8
1	400	<a href="#">105MPR400K</a>	150	31x22x15	27.5	0.8
1.5	250	<a href="#">155MPR250K</a>	100	31x18x13	27.5	0.8
2.2	250	<a href="#">225MPR250K</a>	100	31x21x15	27.5	0.8