

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



Metallized Polyester Film Capacitors

Axial Leaded, General Purpose


FEATURES

Small Size - Low ESR - General Purpose

APPLICATIONS

General Purpose - Bypass - Coupling - Blocking

Operating Temperature Range	-40°C to +105°C									
Capacitance Tolerance	±10% at 1 kHz, 25°C ±5% optional									
Peak, AC voltage (50/60 Hz)	WVDC	50	63	100	250	400	630	1000	1500	
	VAC	30	40	63	160	200	220	250	300	
For T>+85°C, The voltage must be decreased by 1.25% per °C										
Dissipation Factor (MAX) 25°C	Frequency (kHz)	C≤0.1uF			0.1uF<C≤1.0uF			C>1.0uF		
	1	1.0%			1.0%			1.0%		
	10	1.5%			1.5%			-		
	100	3.0%			-			-		
Insulation Resistance @25°C (<70% RH)for 1 minute at 100VDC applied	WVDC	Capacitance			Insulation Resistance					
	≤100WVDC	≤0.33μF			15000 MΩ					
	>100WVDC	≤0.33μF			30000 MΩxμF					
	≤100WVDC	>0.33μF			15000 MΩxμF					
	>100WVDC	>0.33μF			10000 MΩxμF					
Load Life	2000 Hours, +85C with 125% of rated voltage									
	Capacitance Change		≤5% of initially measured value							
	Dissipation Factor		≤0.005 at 1kHz and 25°C for C≤1uF ≤0.005 at 1kHz and 25°C For C>1uF							
	Insulation Resistance		>50% of maximum specified value							
Damp Heat test	56 days at40°C with 93%RH(+/-2%), +40°C and no voltage applied									
	Capacitance Change		≤5% of initially measured value							
	Dissipation Factor		≤0.005 at 1kHz and 25°C							
	Insulation Resistance		≥50% of maximum specified value							
Self Inductance	<1 nano-Henry per mm of body length and lead length									
Capacitance Drift Factor	<1.0% after 2 years at 40°C									
Capacitance Temperature Coefficient	+400 ppm/°C, ±200ppm/°C									
Dielectric Strength	Terminal to Terminal									
	160% of VDC applied for 2 Seconds and 25°C									
Dielectric Construction	Polyester									
Coating	Metallized film Internal series connected (≥1000WVDC)									
Leads	Flame Retardant Polyester tape wrap (UL 510) with epoxy resin end fills(UL94V0)									

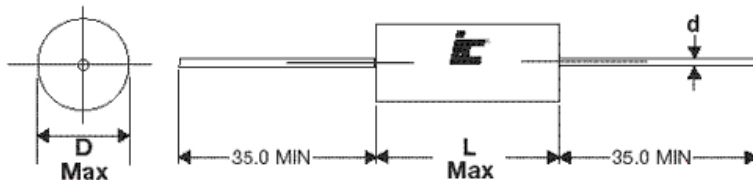

Lead Diameter	
D	d
≤9	0.6
9<D≤20	0.8
>20	1.0

MWR

Metallized Polyester Axial Lead

Capacitance (µF)	WVDC	IC PART NUMBER	dv/dt (v/µ sec.)	Dims DxL (mm)	d (MM)
0.001	630	102MWR630K	60	5.5x11.5	0.6
0.001	1500	102MWR152KB	90	5.5x14.5	0.6
0.0015	630	152MWR630K	60	5.5x11.5	0.6
0.0015	1500	152MWR152KB	90	5.5x14.5	0.6
0.0022	630	222MWR630K	60	5.5x11.5	0.6
0.0022	1500	222MWR152KB	90	6x14.5	0.6
0.0033	630	332MWR630K	60	5.5x11.5	0.6
0.0033	1500	332MWR152KB	90	6.5x14.5	0.6
0.0039	630	392MWR630K	60	5.5x11.5	0.6
0.0047	630	472MWR630K	60	5.5x11.5	0.6
0.0047	1500	472MWR152KB	90	7x14.5	0.6
0.0068	630	682MWR630K	60	5.5x11.5	0.6
0.0068	1500	682MWR152KB	90	8x14.5	0.6
0.01	400	103MWR400K	14	5x11.5	0.6
0.01	630	103MWR630K	20	6x14	0.6
0.01	1000	103MWR102K	80	7x14.5	0.6
0.01	1500	103MWR152KB	90	8.5x14.5	0.8
0.015	400	153MWR400K	14	5.5x14.5	0.6
0.015	630	153MWR630K	20	6.5x14.5	0.6
0.015	1000	153MWR102K	80	8x14.5	0.6
0.015	1500	153MWR152KD	50	8.5x20.5	0.8
0.022	250	223MWR250K	10	5.5x11.5	0.6
0.022	400	223MWR400K	14	5.5x14	0.6
0.022	630	223MWR630K	20	8x14	0.6
0.022	1000	223MWR102K	40	9.5x20.5	0.8
0.022	1500	223MWR152KD	50	9.5x20.5	0.8
0.033	250	333MWR250K	10	6x11.5	0.6
0.033	400	333MWR400K	6	6x14	0.6
0.033	630	333MWR630K	15	8x20.5	0.6
0.033	1000	333MWR102K	40	10.5x20.5	0.8
0.033	1500	333MWR152KD	50	11x20.5	0.8
0.039	250	393MWR250K	10	6x11.5	0.6
0.039	400	393MWR400K	14	7x15.5	0.6
0.039	630	393MWR630K	15	8x20.5	0.6
0.047	250	473MWR250K	10	5.5x14	0.6
0.047	400	473MWR400K	6	7x14	0.6
0.047	630	473MWR630K	15	7.5x19	0.6
0.047	1000	473MWR102K	33	11x29	0.8
0.047	1500	473MWR152KG	40	11x29	0.8
0.068	100	683MWR100K	6	5.5x11.5	0.6
0.068	250	683MWR250K	10	6.5x14.5	0.6
0.068	400	683MWR400K	10	7.5x20.5	0.6
0.068	630	683MWR630K	15	9x20.5	0.8
0.068	1000	683MWR102K	33	12.5x29	0.8
0.068	1500	683MWR152KG	40	12.5x29	0.8
0.1	100	104MWR100K	6	6x11.5	0.6
0.1	250	104MWR250K	10	6x14	0.6
0.1	400	104MWR400K	10	7.5x19	0.6
0.1	630	104MWR630K	10	9x27	0.8
0.1	1000	104MWR102K	33	12x29	0.8
0.1	1500	104MWR152KJ	25	13x34	0.8
0.15	63	154MWR063K	11	5.5x14	0.6
0.15	100	154MWR100K	6	6x14	0.6
0.15	250	154MWR250K	10	7x14	0.6
0.15	400	154MWR400K	10	8.5x19	0.6
0.15	630	154MWR630K	10	10.5x29	0.8
0.15	1000	154MWR102K	20	13x34	0.8
0.15	1500	154MWR152KJ	25	15x34	0.8

Capacitance (µF)	WVDC	IC PART NUMBER	dv/dt (v/µ sec.)	Dims DxL (mm)	d (MM)
0.22	50	224MWR050K	9	6x11.5	0.6
0.22	100	224MWR100K	6	6.5x14	0.6
0.22	250	224MWR250K	7	7x19	0.6
0.22	400	224MWR400K	6	8.5x27	0.8
0.22	630	224MWR630K	10	12.5x27	0.8
0.22	1000	224MWR102K	20	14.5x34	0.8
0.22	1500	224MWR152KJ	25	17.5x34	0.8
0.33	50	334MWR050K	9	6x11.5	0.6
0.33	100	334MWR100K	6	7.5x14	0.6
0.33	250	334MWR250K	7	8x19	0.6
0.33	400	334MWR400K	6	10x27	0.8
0.33	630	334MWR630K	6	13.5x34	0.8
0.33	1000	334MWR102K	20	17x34	0.8
0.33	1500	334MWR152KJ	25	20.5x34	1
0.47	50	474MWR050K	9	6x11.5	0.6
0.47	100	474MWR100K	6	7x15.5	0.6
0.47	250	474MWR250K	7	9.5x19	0.8
0.47	400	474MWR400K	6	12.5x27	0.8
0.47	630	474MWR630K	6	15x34	0.8
0.47	1000	474MWR102K	20	19.5x34	0.8
0.47	1500	474MWR152KJ	25	24x34	1
0.68	50	684MWR050K	9	6x11.5	0.6
0.68	63	684MWR063K	7	6.5x19	0.6
0.68	100	684MWR100K	3	8x19	0.6
0.68	250	684MWR250K	4	9.5x27	0.8
0.68	400	684MWR400K	4	12.5x34	0.8
0.68	630	684MWR630K	6	18.5x34	0.8
0.68	1500	684MWR152KN	25	24.5x46.5	1
1	50	105MWR050K	9	7.5x11.5	0.6
1	63	105MWR063K	7	8x20.5	0.6
1	100	105MWR100K	3	9.5x19	0.8
1	250	105MWR250K	4	10.5x27	0.8
1	400	105MWR400K	4	14.5x34	0.8
1	630	105MWR630K	6	22x34	1
1	1500	105MWR152KN	25	28.5x46.5	1
1.5	50	155MWR050K	9	8x14.5	0.6
1.5	63	155MWR063K	7	9.5x20.5	0.8
1.5	100	155MWR100K	2	9x27	0.8
1.5	250	155MWR250K	4	12.5x29	0.8
1.5	400	155MWR400K	4	17.5x34	0.8
1.5	630	155MWR630K	6	26.5x34	1
1.5	1500	155MWR152KN	25	34x46.5	1
2.2	50	225MWR050K	9	9x14.5	0.8
2.2	63	225MWR063K	5	10.5x29	0.8
2.2	100	225MWR100K	2	12x29	0.8
2.2	250	225MWR250K	2	13.5x34	0.8
2.2	400	225MWR400K	2	20.5x34	0.8
3.3	50	335MWR050K	6	10x20.5	0.8
3.3	63	335MWR063K	5	11x29	0.8
3.3	100	335MWR100K	2	13x29	0.8
3.3	250	335MWR250K	2	16x34	0.8
3.3	400	335MWR400K	2	22.5x47	1
4.7	50	475MWR050K	6	10.5x20.5	0.8
4.7	63	475MWR063K	5	12.5x29	0.8
4.7	100	475MWR100K	4	12.5x34	0.8
4.7	250	475MWR250K	2	19.5x34	0.8
6.8	50	685MWR050K	6	11.5x20.5	0.8
6.8	100	685MWR100K	2	17x34	0.8

MWR

Metallized Polyester Axial Lead

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims DxL (mm)	d (MM)
6.8	250	685MWR250K	5	23x34	1
10	50	106MWR050K	6	13.5x20.5	0.8
10	63	106MWR063K	4	14x34	0.8
10	100	106MWR100K	2	18x34	0.8

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims DxL (mm)	d (MM)
10	250	106MWR250K	2	24.5x46.5	1
15	100	156MWR100K	2	21x34	1
22	100	226MWR100K	2	22x46	1