

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .




FEATURES

Low ESR - High AC/Ripple Current - Stable with frequency and temperature

APPLICATIONS

Switching Power Supplies - General Purpose - AC Applications (Not across the Line)

Operating Temperature Range	-55°C to +105°C				
Capacitance Tolerance	±10% at 1 kHz, 25°C ±5% optional				
AC Voltage	WVDC	160	250	400	630
	VAC	90	200	220	250
For T>+85°C , The voltage must be decreased by 1.5% per °C					
Dissipation Factor (MAX) 1 kHz, 25°C	0.001				
Insulation Resistance @25°C (<70% RH)for 1 minute at 100VDC applied	Capacitance	Insulation Resistance			
	≤0.33µF	30000 MΩ			
	>0.33µF	10000 MΩxµF			
Load Life	2000 Hours, +85C with 125% of rated voltage				
	Capacitance Change	≤3% of initially measured value			
	Dissipation Factor	≤0.001 at 1kHz and 25°C			
	Insulation Resistance	≥50% of maximum specified value			
Damp Heat test	56 days at40°C with 90 to 95%RH, +40°C and no voltage applied				
	Capacitance Change	≤5% of initially measured value			
	Dissipation Factor	≤0.005 at 1kHz and 25°C			
	Insulation Resistance	≥50% of maximum specified value			
Self Inductance	<1 nano-Henry per mm of body length and lead length				
Capacitance Drift Factor	<0.5% after 2 years at 40°C				
Capacitance Temperature Coefficient	-200 ppm/°C, ±100ppm/°C				
Dielectric Strength	Terminal to Terminal				
	200% of rated VDC or VAC applied for 10 Seconds and 25°C				
Dielectric	Polypropylene				
Construction	Metallized film				
Coating	Flame Retardant Polyester tape wrap (UL 510) with epoxy resin end fills(UL94V0)				
Leads	Lead free tinned copper leads				

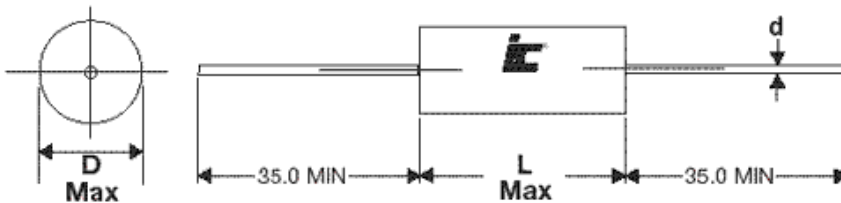

Lead Diameter	
D	d
≤9	0.6
>9	0.8

MPW

Metallized Polypropylene Axial Lead

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims DxL (mm)	d (MM)
0.001	630	102MPW630K	22	6.5x14.5	0.6
0.0015	400	152MPW400K	15	6.5x14.5	0.6
0.0015	630	152MPW630K	22	6.5x14.5	0.6
0.0022	400	222MPW400K	15	5.5x11.5	0.6
0.0022	630	222MPW630K	22	6.5x14.5	0.6
0.0033	400	332MPW400K	15	6.5x14.5	0.6
0.0033	630	332MPW630K	22	6.5x14.5	0.6
0.0047	400	472MPW400K	15	6.5x14.5	0.6
0.0047	630	472MPW630K	22	6x14.5	0.6
0.0068	400	682MPW400K	15	5.5x11.5	0.6
0.0068	630	682MPW630K	22	6x14.5	0.6
0.0082	400	822MPW400K	15	6.5x14.5	0.6
0.0082	630	822MPW630K	22	6x14.5	0.6
0.01	400	103MPW400K	15	6x14.5	0.6
0.01	630	103MPW630K	22	6.5x14.5	0.6
0.015	250	153MPW250K	12	5.5x14.5	0.6
0.015	400	153MPW400K	15	6.5x14.5	0.6
0.015	630	153MPW630K	22	7.5x14.5	0.6
0.022	160	223MPW160K	22	5.5x11.5	0.6
0.022	250	223MPW250K	12	7x14	0.6
0.022	400	223MPW400K	15	7x14.5	0.6
0.022	630	223MPW630K	22	8.5x14.5	0.8
0.033	160	333MPW160K	22	5.5x11.5	0.6
0.033	250	333MPW250K	12	6.5x14.5	0.6
0.033	400	333MPW400K	15	7.5x14.5	0.6
0.033	630	333MPW630K	16	8.5x20.5	0.8
0.047	160	473MPW160K	22	5.5x11.5	0.6
0.047	250	473MPW250K	12	6.5x14.5	0.6
0.047	400	473MPW400K	15	8.5x14.5	0.8
0.047	630	473MPW630K	16	9x20.5	0.8
0.068	160	683MPW160K	22	6.5x14.5	0.6
0.068	250	683MPW250K	12	7.5x14.5	0.6
0.068	400	683MPW400K	12	8.5x20.5	0.8
0.068	630	683MPW630K	12	9x29	0.8
0.1	160	104MPW160K	22	6.5x14.5	0.6
0.1	250	104MPW250K	12	8.5x14.5	0.8
0.1	400	104MPW400K	12	8.5x20.5	0.8
0.1	630	104MPW630K	12	10.5x29	0.8

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims DxL (mm)	d (MM)
0.15	160	154MPW160K	22	7.5x14.5	0.6
0.15	250	154MPW250K	8	8x20.5	0.6
0.15	400	154MPW400K	7	9.5x29	0.8
0.15	630	154MPW630K	12	12x29	0.8
0.22	160	224MPW160K	22	8x14.5	0.6
0.22	250	224MPW250K	8	9.5x20.5	0.8
0.22	400	224MPW400K	7	10.5x29	0.8
0.22	630	224MPW630K	7	12.5x34	0.8
0.33	160	334MPW160K	18	8.5x20.5	0.8
0.33	250	334MPW250K	5	10x29	0.8
0.33	400	334MPW400K	7	12.5x29	0.8
0.33	630	334MPW630K	7	15.5x34	0.8
0.47	160	474MPW160K	18	9.5x20.5	0.8
0.47	250	474MPW250K	5	11x29	0.8
0.47	400	474MPW400K	7	14x29	0.8
0.47	630	474MPW630K	7	18x34	0.8
0.68	160	684MPW160K	11	10x29	0.8
0.68	250	684MPW250K	5	12.5x29	0.8
0.68	400	684MPW400K	5	15x34	0.8
0.68	630	684MPW630K	7	22x34	1
1	160	105MPW160K	11	11x29	0.8
1	250	105MPW250K	3	13x34	0.8
1	400	105MPW400K	5	17.5x34	0.8
1.5	160	155MPW160K	11	13x29	0.8
1.5	250	155MPW250K	8	16x34	0.8
1.5	400	155MPW400K	5	20.5x34	1
2.2	160	225MPW160K	8	13.5x34	0.8
2.2	250	225MPW250K	3	19x34	0.8
2.2	400	225MPW400K	3	24x46	1
3.3	160	335MPW160K	8	16x34	0.8
3.3	250	335MPW250K	2	17x47	0.8
3.3	400	335MPW400K	3	26x44	1
4.7	160	475MPW160K	8	18x34	0.8
4.7	250	475MPW250K	2	22.5x47	1
4.7	400	475MPW400K	3	28.5x47	1
6.8	160	685MPW160K	8	18.5x46.5	0.8
10	160	106MPW160K	8	22.5x46.5	1