

阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

MORNSUN®


IB_LD-1W & IB_LS-1W Series 1W, FIXED INPUT, ISOLATED & REGULATED SINGLE OUTPUT DC-DC CONVERTER

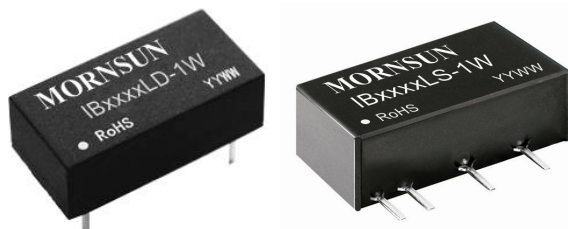

Patent Protection RoHS

MODEL SELECTION

IB0515LS-1W

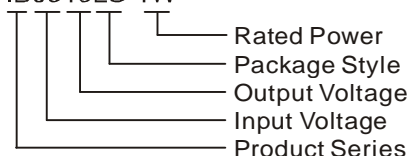

FEATURES

- | Small Footprint
- | SIP/DIP Package
- | 1KVDC Isolation
- | Temperature Range: -40°C to +85°C
- | No Heat sink Required
- | Internal SMD Construction
- | No External Component Required
- | Industry Standard Pinout
- | RoHS Compliance

APPLICATIONS

The IB_LD-1W & IB_LS-1W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 5\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

PRODUCT PROGRAM

Model	Input Voltage (VDC)		Output Voltage (VDC)	Output Current (mA)		Input Current (mA)(Typ.)		Efficiency(%) @Max. Load	
	Nominal	Range		Max.	Min.	@Max. Load	@No Load	Min.	Typ.
IB0505LD-1W	5	4.75-5.25	5	200	20	299	30	63	67
IB0512LD-1W			12	83	9	278		68	72
IB0515LD-1W			15	67	7	274		69	73
IB0503LS-1W			3.3	303	3	333		56	60
IB0505LS-1W			5	200	20	299		63	67
IB0509LS-1W			9	111	12	286		66	70
IB0512LS-1W			12	83	9	282		67	71
IB0515LS-1W			15	67	7	274		69	73
IB0524LS-1W			24	42	5	294		64	68
IB1205LD-1W			12	11.4-12.6	5	200		20	124
IB1209LD-1W	9	111			12	116	68	72	
IB1212LD-1W	12	83			9	119	66	70	
B1215LD-1W	15	67			7	113	70	74	
IB1205LS-1W	5	200			20	124	63	67	
IB1209LS-1W	9	111			12	116	68	72	
IB1212LS-1W	12	83			9	119	66	70	
IB1215LS-1W	15	67			7	113	70	74	
IB1224LS-1W	24	42			5	123	64	68	
IB1505LS-1W	15	14.25-15.75			5	200	20	100	15
IB1515LS-1W			15	67	7	93	68	72	
IB1524LS-1W			24	42	5	98	64	68	

Model	Input Voltage (VDC)		Output Voltage (VDC)	Output Current (mA)		Input Current (mA)(Typ.)		Efficiency(%) @Max. Load	
	Nominal	Range		Max.	Min.	@Max. Load	@No Load	Min.	Typ.
IB2405LD-1W	24	22.8-25.2	5	200	20	61	8	64	68
IB2409LD-1W			9	111	12	61		64	68
IB2412LD-1W			12	83	9	57		69	73
IB2415LD-1W			15	67	7	56		71	75
IB2424LD-1W			24	42	5	61		64	68
IB2405LS-1W			5	200	20	61		64	68
IB2409LS-1W			9	111	12	61		64	68
IB2412LS-1W			12	83	9	57		69	73
IB2415LS-1W			15	67	7	56		71	75
IB2424LS-1W			24	42	5	61		64	68

OUTPUT SPECIFICATIONS

Item	Test condition	Min.	Typ.	Max.	Unit
Line regulation	For Vin change of $\pm 5\%$	--	--	± 0.25	%
Load regulation	10% to 100% load	--	± 1	± 2	
Output voltage accuracy	100% load	--	--	± 3	
Temperature drift	100% load	--	--	0.03	%/°C
Output ripple*	20MHz Bandwidth	--	10	20	mVp-p
Output Noise*	20MHz Bandwidth	--	50	75	

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at DC-DC Application Notes.

COMMON SPECIFICATION


Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage humidity range	Non condensing	--	--	95	%
Operating temperature		-40	--	85	°C
Storage temperature		-55	--	125	
Lead temperature	Ta=25°C	--	15	25	
Temp. rise at full load	1.5mm from case for 10 seconds	--	--	300	
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
Short circuit protection	*IBXX05(LS/LD)-1W IBXX24(LS/LD)-1W	--	--	1	S
	Others	Continuous			
Switching Frequency	100% load, nominal input	--	120	300	KHz
MTBF	MIL-HDBK-217F@25°C	3500	--	--	K hours
Weight	IB_LS-1W / IB_LS-W75	--	2.1	--	g
	IB_LD-1W / IB_LD-W75	--	2.4	--	g

*Supply voltage must be discontinued at the end of short circuit duration.

ISOLATION SPECIFICATIONS

Item	Test condition	Min.	Typ.	Max.	Unit
Isolation voltage	Input-Output, tested for 1 minute and leakage current less than 1 mA	1000	--	--	VDC
Isolation resistance	Input-Output, test at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-Output, 100KHz/0.1V	--	60	--	pF

TYPICAL CHARACTERISTICS

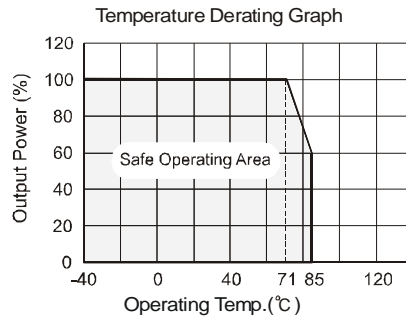

OUTLINE DIMENSIONS & PIN CONNECTIONS

IB_LS-1W / IB_LS-W75

MECHANICAL DIMENSIONS

Pin	Function
1	Vin
2	GND
4	0V
6	+Vo

Note:
Unit :mm[inch]
Pin section tolerances :±0.10[±0.004]
General tolerances:±0.25[±0.010]

THIRD ANGLE PROJECTION

RECOMMENDED FOOTPRINT DETAILS

Note : Grid 2.54*2.54mm

TUBE PACKAGING DIMENSIONS

Note:
Unit :mm[inch]
General tolerances: ± 0.50[± 0.020]
L=220[8.661] Tube Quantity: 10pcs
L=530[20.866] Tube Quantity: 25pcs
Inner carton(S): L*W*H=255*170*80
Outer carton(S): L*W*H=375*280*270, 6 inner cartons(S)
Inner carton(L): L*W*H=580*200*100
Outer carton(L): L*W*H=600*215*220, 2 inner cartons(L)
Outer carton(L): L*W*H=600*215*325, 3 inner cartons(L)

110000105-A0

IB_LD-1W / IB_LD-W75

MECHANICAL DIMENSIONS

Pin	Function
1	GND
7	NC
9	+Vo
11	0V
14	Vin

NC:No connection

Note:
Unit:mm[inch]
Pin section tolerances:±0.10[±0.004]
General tolerances:±0.25[±0.010]

THIRD ANGLE PROJECTION

RECOMMENDED FOOTPRINT DETAILS

Note : Grid 2.54*2.54mm

TUBE PACKAGING DIMENSIONS

Note :
Unit:mm[inch]
General tolerances:±0.50[±0.020]
L=530[20.866] Tube Quantity:25pcs
L=220[8.661] Tube Quantity:10pcs
Inner carton(S): L*W*H=255*170*80
Outer carton(S): L*W*H=375*280*270, 6 inner cartons(S)
Inner carton(L): L*W*H=580*200*100
Outer carton(L): L*W*H=600*215*220, 2 inner cartons(L)
Outer carton(L): L*W*H=600*215*325, 3 inner cartons(L)

1100003805-A0


APPLICATION NOTE

1) Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load could not be less than 10% of the full load. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.

2) Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

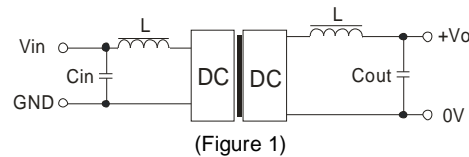

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (μ F)	Vout (VDC)	Cout (μ F)
5	4.7	3.3 / 5	10
12	4.7	9	4.7
15	2.2	12	2.2
24	1	15	1
--	--	24	0.47


It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

3) Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

4) Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series (Figure 2).

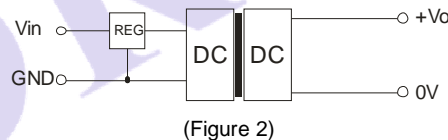

(Figure 2)

5) When the environment temperature is higher than 71°C, the product output power should be less than 60% of the rated power.

6) It is not recommended to increase the output power capability by connecting two or more converters in parallel. The product is not hot-swappable.

Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specifications.
2. Max. Capacitive Load is tested at nominal input voltage and full load.
3. Unless otherwise noted, All specifications are measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load.
4. In this datasheet, all test methods are based on our corporate standards.
5. All characteristics are for listed models, and non-standard models may perform differently. Please contact our technical support for more detail.
6. Please contact our technical support for any specific requirement.
7. Specifications of this product are subject to changes without prior notice.

MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou, P.R.China.

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

[Http://www.mornsun-power.com](http://www.mornsun-power.com)