

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Dielectric Filters (GIGAFIL®)




Band Pass Filters



DFCB Series 800/900MHz

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+-5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

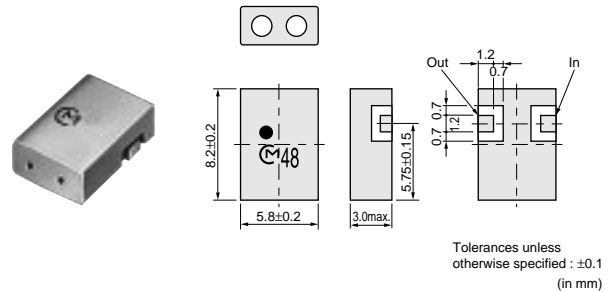

■ Characteristics

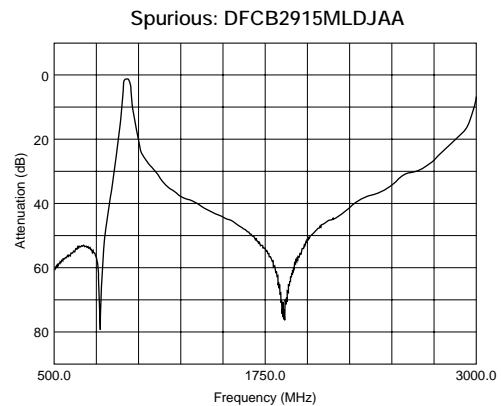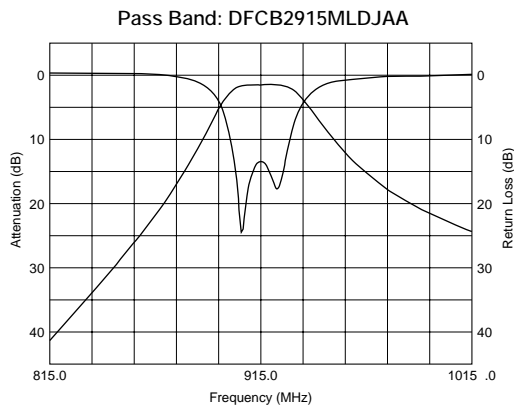

| Application | Part Number | fo (MHz) | Bandwidth (MHz) | IL at BW (dB max.) | Attenuation (dB min.) | Operation Temp. (°C) |
|-------------|----------------|----------|-----------------|--------------------|------------------------|----------------------|
| AMPS | DFCB2836MLDJAA | 836.5 | 25 | 2.6 | 6.5 (869 to 894MHz) | -30 to +85 |
| CT2 | DFCB2841MLEJAA | 841 | 4 | 3.0 | 38 (Fo-150MHz) | -30 to +85 |
| CT2 | DFCB2866MLEJAA | 866 | 4 | 3.0 | 38 (Fo-150MHz) | -30 to +85 |
| AMPS | DFCB2881MLDJAA | 881.5 | 25 | 2.6 | 9 (824 to 849MHz) | -30 to +85 |
| CT1+ | DFCB2886MLEJAA | 886 | 2 | 3.0 | 24 (Fo-44MHz) | -30 to +85 |
| GSM | DFCB2902MLDJAA | 902.5 | 25 | 2.6 | 27 (Fo-77.5MHz) | -30 to +85 |
| WLAN915 | DFCB2903MLEJAA | 903 | 2 | 3.0 | 20 (Fo+22MHz) | -30 to +85 |
| CT2 | DFCB2912MLDJAA | 912 | 4 | 2.0 | 50 (Fo-150MHz) | -30 to +85 |
| CT2 | DFCB2912MLEJAA | 912 | 4 | 3.0 | 38 (Fo-150MHz) | -30 to +85 |
| CT1 | DFCB2914MLEJAA | 914.5 | 1 | 3.0 | 24 (Fo-44MHz) | -30 to +85 |
| WLAN915 | DFCB2915MLDJAA | 915 | 26 | 2.5 | 27 (837.5MHz) | -35 to +85 |
| WLAN915 | DFCB2926MLEJAA | 926.25 | 2.7 | 2.8 | 21 (902.4 to 905.1MHz) | -30 to +85 |
| WLAN915 | DFCB2927MLEJAA | 927 | 2 | 3.0 | 15 (Fo-22MHz) | -30 to +85 |
| CT1+ | DFCB2931MLEJAA | 931 | 2 | 3.0 | 24 (Fo-44MHz) | -30 to +85 |
| GSM | DFCB2947MLDJAA | 947.5 | 25 | 2.6 | 27 (Fo-77.5MHz) | -30 to +85 |
| CT1 | DFCB2959MLEJAA | 959.5 | 1 | 3.0 | 30 (Fo+44MHz) | -30 to +85 |
| LMR | DFCB3815MLDJAA | 815.5 | 19 | 2.5 | 12 (Fo±35.5MHz) | -30 to +85 |
| AMPS | DFCB3836MLDJAA | 836.5 | 25 | 3.0 | 12 (869 to 894MHz) | -30 to +85 |
| CT2 | DFCB3841MLEJAA | 841 | 4 | 5.3 | 60 (Fo-150MHz) | -30 to +85 |
| LMR | DFCB3860MLDJAA | 860.5 | 19 | 2.5 | 13 (Fo-35.5MHz) | -30 to +85 |

Continued on the following page.

Continued from the preceding page.

| Application | Part Number | fo (MHz) | Bandwidth (MHz) | IL at BW (dB max.) | Attenuation (dB min.) | Operation Temp. (°C) |
|-------------|-----------------------|----------|-----------------|--------------------|-----------------------|----------------------|
| CT2 | DFCB3866MLEJAA | 866 | 4 | 5.3 | 60 (Fo-150MHz) | -30 to +85 |
| AMPS | DFCB3881MLDJAA | 881.5 | 25 | 3.0 | 15 (824 to 849MHz) | -30 to +85 |
| CT1+ | DFCB3886MLEJAA | 886 | 2 | 5.3 | 45 (Fo-44MHz) | -30 to +85 |
| GSM | DFCB3902MLDJAA | 902.5 | 25 | 3.0 | 45 (Fo-77.5MHz) | -30 to +85 |
| WLAN915 | DFCB3903MLEJAA | 903 | 2 | 5.3 | 29 (Fo-22MHz) | -30 to +85 |
| CT2 | DFCB3912MLEJAA | 912 | 4 | 5.3 | 60 (Fo-150MHz) | -30 to +85 |
| CT1 | DFCB3914MLEJAA | 914.5 | 1 | 5.3 | 45 (Fo-44MHz) | -30 to +85 |
| WLAN915 | DFCB3915MLDJAA | 915 | 26 | 3.0 | 15 (Fo-32.5MHz) | -30 to +85 |
| WLAN915 | DFCB3927MLEJAA | 927 | 2 | 5.3 | 29 (Fo-22MHz) | -30 to +85 |
| CT1+ | DFCB3931MLEJAA | 931 | 2 | 5.3 | 45 (Fo-44MHz) | -30 to +85 |
| GSM | DFCB3947MLDJAA | 947.5 | 25 | 3.0 | 45 (Fo-77.5MHz) | -30 to +85 |
| CT1 | DFCB3959MLEJAA | 959.5 | 1 | 5.3 | 45 (Fo-44MHz) | -30 to +85 |


DFCB Series 1.5-5GHz

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine




DFCB22G33LBJAA

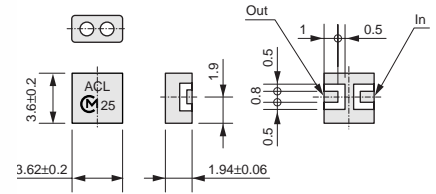

Tolerances unless otherwise specified : ±0.1 (in mm)




DFCB32G33LBJAA

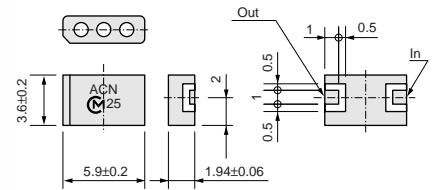

Tolerances unless otherwise specified : ±0.1 (in mm)




DFCB25G25LAHAA

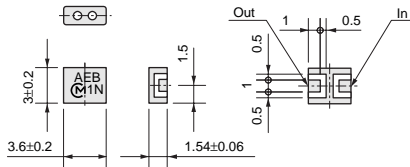

Tolerances unless otherwise specified : ±0.1 (in mm)




DFCB35G25LAHAA

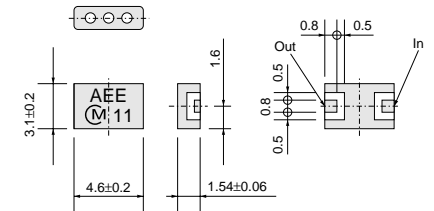


Tolerances unless otherwise specified : ±0.1 (in mm)

■ Characteristics

Pass Band: DFCB22G33LBJAA

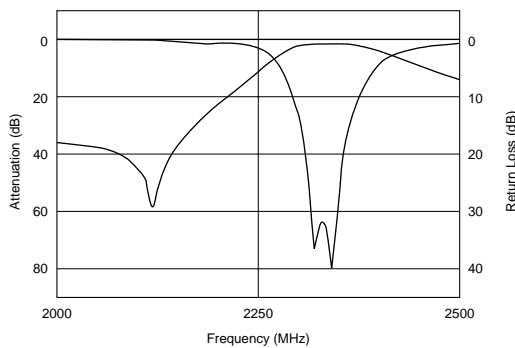

Spurious: DFCB22G33LBJAA

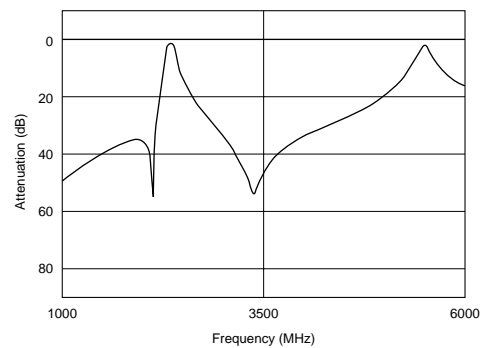


Continued on the following page. ↗


Continued from the preceding page.

Characteristics


Pass Band: DFCB32G33LBJAA

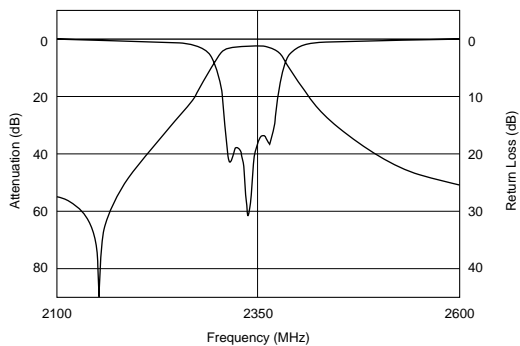


Spurious: DFCB32G33LBJAA

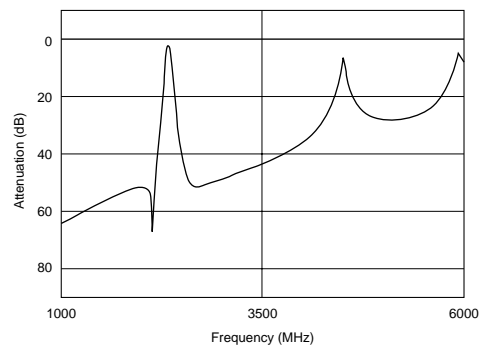


Pass Band: DFCB25G25LAHAA

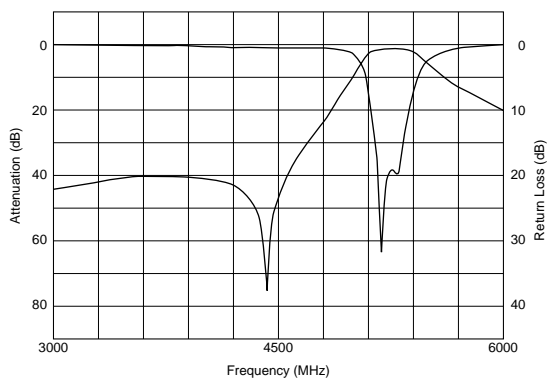


Spurious: DFCB25G25LAHAA

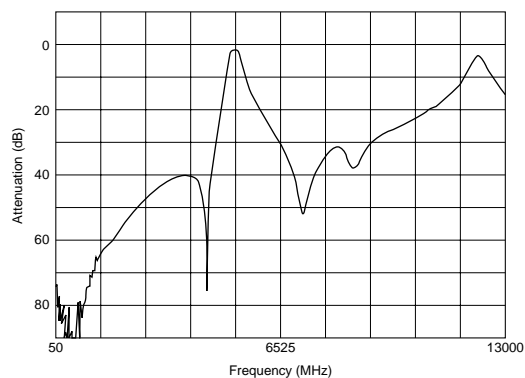

Pass Band: DFCB35G25LAHAA

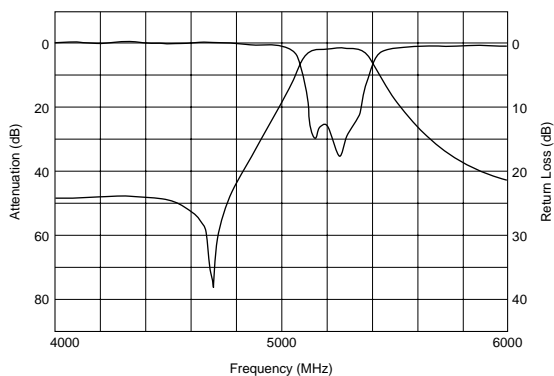

Spurious: DFCB35G25LAHAA

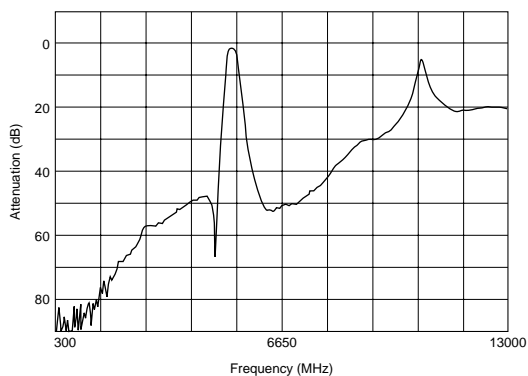

| Application | Part Number | fo (MHz) | Bandwidth (MHz) | IL at BW (dB max.) | Attenuation (dB min.) | Operation Temp. (°C) |
|-------------|----------------|----------|-----------------|--------------------|-----------------------|----------------------|
| DAB | DFCB21G47LBJAA | 1472 | 40 | 2.0 | 38 (1122MHz) | -30 to +85 |
| PDC1.5 | DFCB21G48LBJAA | 1489 | 24 | 1.4 | 10 (1607 to 1631MHz) | -30 to +85 |
| GPS | DFCB21G57LBJAB | 1575.42 | 3 | 1.3 | 37 (1850 to 1910MHz) | -35 to +85 |
| GPS | DFCB21G57LCJAA | 1575.42 | 2 | 3.5 | 15 (Fo±50MHz) | -30 to +85 |
| GPS | DFCB21G57LDJAB | 1575.42 | 2 | 3.15 | 18 (Fo±50MHz) | -30 to +85 |
| DCS1800 | DFCB21G84LDJAA | 1842.5 | 75 | 2.0 | 20 (Fo-160MHz) | -35 to +85 |
| PCS1.9 | DFCB21G88LDJAA | 1880 | 60 | 1.5 | 17 (2280MHz) | -30 to +85 |
| DECT | DFCB21G89LBJAA | 1890 | 20 | 2.0 | 40 (1660 to 1680MHz) | -30 to +85 |
| DECT | DFCB21G89LBJAB | 1890 | 20 | 1.7 | 35 (1660 to 1680MHz) | -30 to +85 |
| DECT | DFCB21G89LDHAA | 1890 | 20 | 0.9 | 27 (1655 to 1679MHz) | -10 to +55 |
| DECT | DFCB21G89LDJAA | 1890 | 20 | 2.0 | 45 (1660 to 1680MHz) | -30 to +85 |
| PHS | DFCB21G90LBJAA | 1907.5 | 25 | 1.0 | 20 (1655 to 1680MHz) | -15 to +55 |

Continued on the following page. ↗


Continued from the preceding page.

| Application | Part Number | fo (MHz) | Bandwidth (MHz) | IL at BW (dB max.) | Attenuation (dB min.) | Operation Temp. (°C) |
|--------------|-----------------------|----------|-----------------|--------------------|-----------------------|----------------------|
| PHS | DFCB21G90LBJAB | 1907.5 | 25 | 1.6 | 35 (1655 to 1680MHz) | -15 to +55 |
| PHS | DFCB21G90LBJAC | 1907.5 | 25 | 1.9 | 45 (1655 to 1680MHz) | -15 to +55 |
| DECT (CHINA) | DFCB21G91LBJAA | 1910 | 20 | 1.7 | 34 (1675 to 1700MHz) | -30 to +85 |
| DECT (CHINA) | DFCB21G91LDJAA | 1910 | 20 | 1.8 | 40 (1675 to 1700MHz) | -30 to +85 |
| CDMA1.9 | DFCB21G92LBJAA | 1920 | 20 | 1.2 | 20 (1655 to 1694MHz) | -30 to +85 |
| CDMA1.9 | DFCB21G92LDJAA | 1920 | 20 | 1.9 | 16 (1800 to 1820MHz) | -30 to +85 |
| PCS1.9 | DFCB21G96LDJAA | 1960 | 60 | 1.5 | 17 (2360MHz) | -30 to +85 |
| TD-SCDMA | DFCB22G01LBJAA | 2017.5 | 15 | 1.5 | 35 (1270MHz) | -35 to +85 |
| W-CDMA | DFCB22G14LBJAA | 2140 | 60 | 2.7 | 26 (1920 to 1980MHz) | -30 to +85 |
| Sirius Radio | DFCB22G32LBJAA | 2326 | 14 | 1.8 | 8.5 (2227MHz) | -35 to +85 |
| XM Satellite | DFCB22G33LBJAA | 2339 | 14 | 1.8 | 8.5 (2240MHz) | -35 to +85 |
| WLAN2.4 | DFCB22G44LANAA | 2441.5 | 83 | 1.5 | 35 (2000MHz) | -35 to +85 |
| WLAN2.4 | DFCB22G44LBJAA | 2442 | 84 | 2.0 | 16 (Fo-250MHz) | -30 to +85 |
| WLAN2.4 | DFCB22G45LBJAA | 2450 | 100 | 2.0 | 15 (Fo-250MHz) | -30 to +85 |
| WLAN2.4 | DFCB22G48LBJAA | 2484 | 26 | 2.0 | 27.5 (Fo-204MHz) | -30 to +85 |
| VICS | DFCB22G50LBJAA | 2500 | 4 | 4.5 | 20 (2440MHz) | -30 to +85 |
| WLAN5G | DFCB25G25LAHAA | 5250 | 200 | 1.5 | 38 (4370 to 4510MHz) | -35 to +85 |
| WLAN5G | DFCB25G59LAHAA | 5597.5 | 255 | 1.5 | 11 (Fo-375MHz) | -35 to +85 |
| WLAN5G | DFCB25G77LAHAA | 5775 | 100 | 1.5 | 12 (Fo-375MHz) | -35 to +85 |
| ETC | DFCB25G80LBHAA | 5800 | 100 | 2.0 | 25 (Fo-375MHz) | -30 to +85 |
| DAB | DFCB31G47LBJAA | 1472 | 40 | 3.0 | 45 (1100MHz) | -35 to +85 |
| DCS1800 | DFCB31G74LBJAA | 1747.5 | 75 | 3.5 | 45 (1464 to 1539MHz) | -30 to +85 |
| DCS1800 | DFCB31G84LBJAA | 1842.5 | 75 | 3.5 | 45 (1559 to 1634MHz) | -30 to +85 |
| DCS1800 | DFCB31G84LBJAB | 1842.5 | 75 | 2.75 | 45 (0.3 to 1388MHz) | -30 to +85 |
| PCS1.9 | DFCB31G88LBJAA | 1880 | 60 | 3.7 | 5 (1930MHz) | -30 to +85 |
| PCS1.9 | DFCB31G88LBJAB | 1880 | 60 | 4.0 | 41 (2043 to 2103MHz) | -30 to +85 |
| W-CDMA | DFCB31G95LBJAA | 1950 | 60 | 3.5 | 35 (2110 to 2170MHz) | -30 to +85 |
| PCS1.9 | DFCB31G96LBJAA | 1960 | 60 | 3.7 | 5 (1910MHz) | -30 to +85 |
| PCS1.9 | DFCB31G96LBJAB | 1960 | 60 | 3.0 | 10 (1498 to 1860MHz) | -30 to +85 |
| PCS1.9 | DFCB31G96LBJAC | 1960 | 60 | 2.8 | 10 (1860MHz) | -30 to +85 |
| PCS1.9 | DFCB31G96LBJAE | 1960 | 60 | 3.7 | 20 (2065 to 2125MHz) | -35 to +85 |
| W-CDMA | DFCB32G14LBJAA | 2140 | 60 | 3.7 | 30 (1920 to 1980MHz) | -30 to +85 |
| Sirius Radio | DFCB32G32LBJAA | 2326 | 14 | 3.0 | 24 (2227MHz) | -35 to +85 |
| XM Satellite | DFCB32G33LBJAA | 2339 | 14 | 3.0 | 24 (2240MHz) | -35 to +85 |
| WLAN2.4 | DFCB32G44LBJAA | 2442 | 84 | 3.2 | 30 (Fo-250MHz) | -30 to +85 |
| WLAN2.4 | DFCB32G45LBJAA | 2450 | 100 | 3.2 | 30 (Fo-250MHz) | -30 to +85 |
| WLAN5G | DFCB35G25LAHAA | 5250 | 200 | 3.3 | 45 (4450 to 4650MHz) | -35 to +85 |
| WLAN5G | DFCB35G59LAHAA | 5597.5 | 255 | 3.6 | 45 (4750 to 5000MHz) | -35 to +85 |
| WLAN5G | DFCB35G77LAHAA | 5775 | 100 | 3.0 | 30 (Fo-375MHz) | -35 to +85 |
| WLAN5G | DFCB35G80LBHAA | 5800 | 150 | 3.4 | 10 (Fo-175MHz) | -35 to +85 |





DFCH Series 800/900MHz

■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

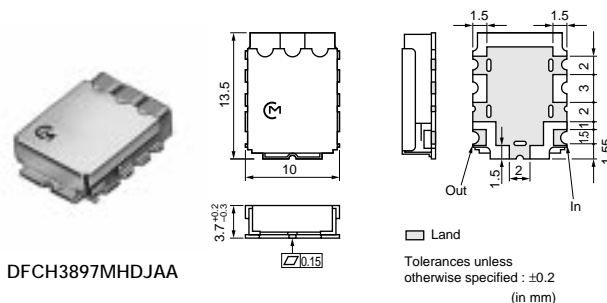

■ Characteristics

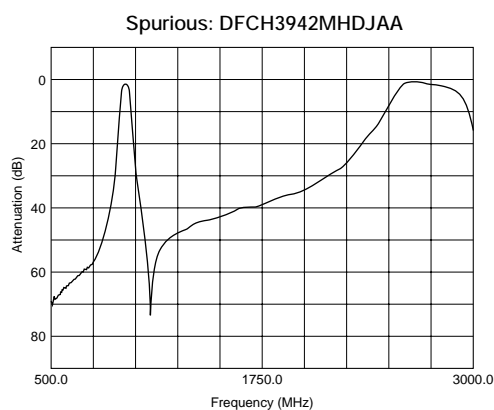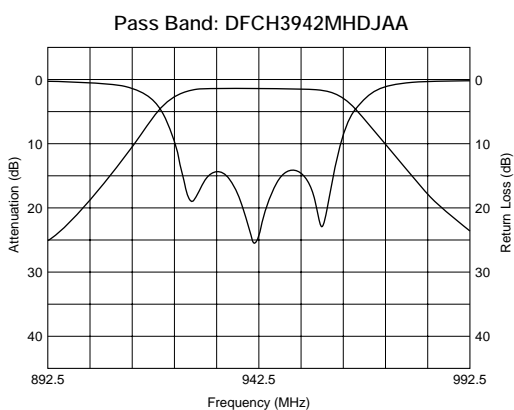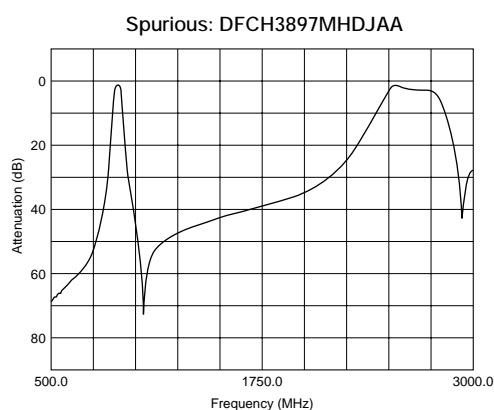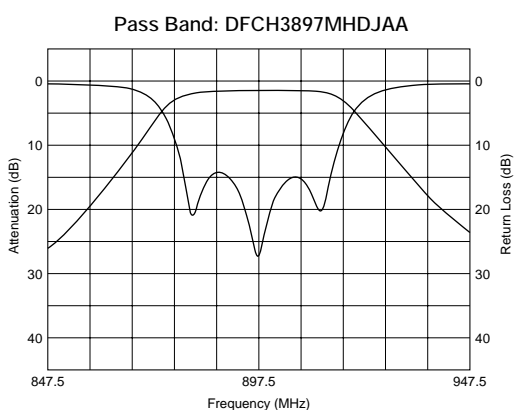

| Application | Part Number | fo (MHz) | Bandwidth (MHz) | IL at BW (dB max.) | Attenuation (dB min.) | Operation Temp. (°C) |
|-------------|----------------|----------|-----------------|--------------------|-----------------------|----------------------|
| LMR | DFCH3815MHDJAA | 815 | 20 | 2.8 | 36 (Fo±80MHz) | -30 to +85 |
| AMPS | DFCH3836MHDJAA | 836.5 | 25 | 2.6 | 12 (Fo±32.5MHz) | -30 to +85 |
| LMR | DFCH3860MHDJAA | 860 | 20 | 2.8 | 36 (Fo±80MHz) | -30 to +85 |
| AMPS | DFCH3881MHDJAA | 881.5 | 25 | 2.6 | 12 (Fo±32.5MHz) | -30 to +85 |
| ETACS | DFCH3888MHDJAA | 888.5 | 33 | 3.0 | 7 (Fo±28.5MHz) | -30 to +85 |
| EGSM | DFCH3897MHDJAA | 897.5 | 35 | 3.0 | 6 (Fo±27.5MHz) | -30 to +85 |
| GSM | DFCH3902MHDJAA | 902.5 | 25 | 2.6 | 12 (Fo±32.5MHz) | -30 to +85 |
| ETACS | DFCH3933MHDJAA | 933.5 | 33 | 3.0 | 7 (Fo±28.5MHz) | -30 to +85 |
| EGSM | DFCH3942MHDJAA | 942.5 | 35 | 3.0 | 6 (Fo±27.5MHz) | -30 to +85 |
| GSM | DFCH3947MHDJAA | 947.5 | 25 | 2.6 | 12 (Fo±32.5MHz) | -30 to +85 |
| ETACS | DFCH4888MHDJAA | 888.5 | 33 | 4.6 | 15 (Fo±28.5MHz) | -30 to +85 |

Continued on the following page. ↗

☐ Continued from the preceding page.



| Application | Part Number | fo (MHz) | Bandwidth (MHz) | IL at BW (dB max.) | Attenuation (dB min.) | Operation Temp. (°C) |
|-------------|-----------------------|----------|-----------------|--------------------|-----------------------|----------------------|
| EGSM | DFCH4897MHDJAA | 897.5 | 35 | 4.6 | 13 (Fo±27.5MHz) | -30 to +85 |
| ETACS | DFCH4933MHDJAA | 933.5 | 33 | 4.6 | 15 (Fo±28.5MHz) | -30 to +85 |
| EGSM | DFCH4942MHDJAA | 942.5 | 35 | 4.6 | 13 (Fo±27.5MHz) | -30 to +85 |

1

DFCH Series 1.5-2.5GHz


■ Features

1. Low insertion loss for using high Q-value dielectric resonators
2. Small and light for using high dielectric constant ceramics
3. Excellent temperature stability for temperature compensated dielectric constant (0+5 ppm/degree C max.)
4. Excellent mechanical stability without vibratile structure
5. SMD and reflow soldering available
6. Mountable by automatic placement machine

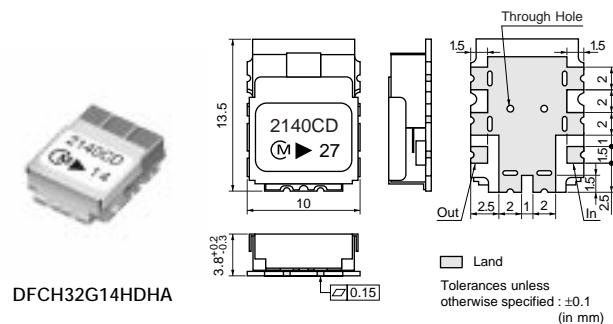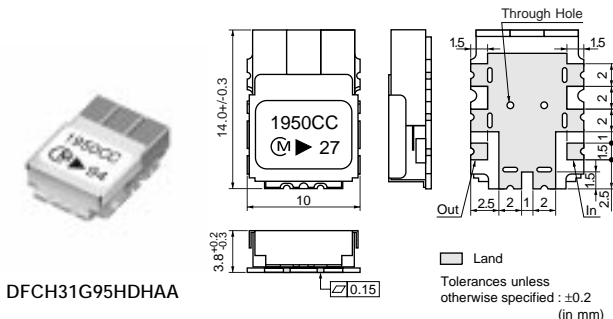


■ Characteristics


Pass Band: DFCH31G95HDHAA

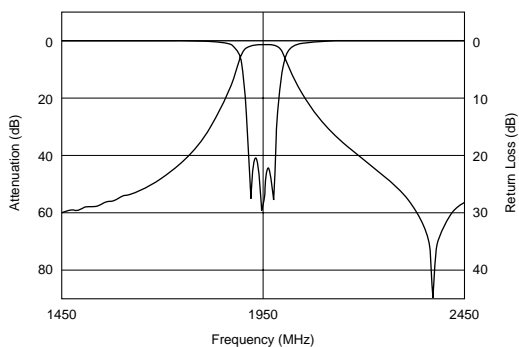


Spurious: DFCH31G95HDHAA

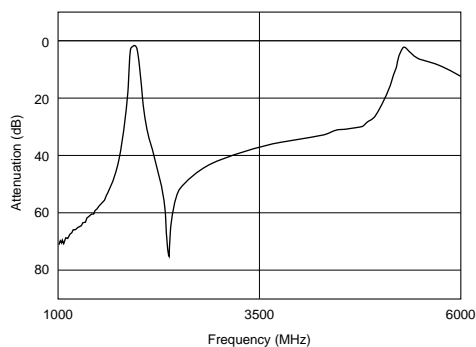

Pass Band: DFCH32G14HDHA

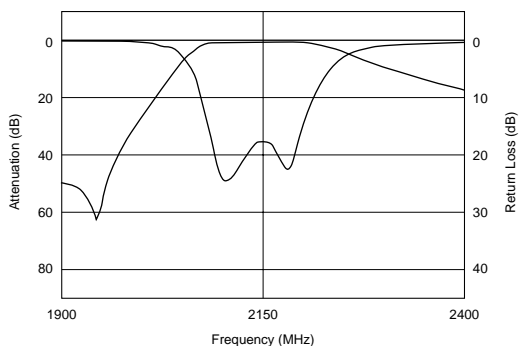

Spurious: DFCH32G14HDHA

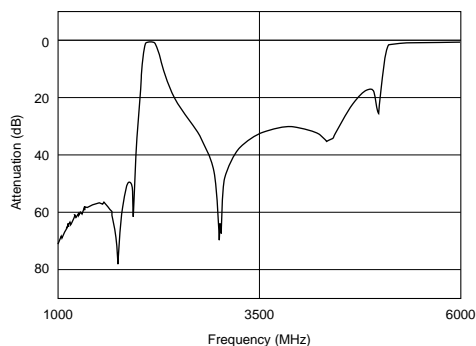


| Application | Part Number | fo (MHz) | Bandwidth (MHz) | IL at BW (dB max.) | Attenuation (dB min.) | Operation Temp. (°C) |
|-------------|-----------------------|----------|-----------------|--------------------|--------------------------|----------------------|
| GPS | DFCH21G57HDHAA | 1575.5 | 2 | 0.9 | 16 (Fo-140MHz) | -30 to +85 |
| PHS | DFCH21G90HDJAA | 1907.5 | 25 | 0.7 | 35 (Fo-227.5MHz) | -30 to +85 |
| WLAN2.4 | DFCH22G44HDHAA | 2442 | 84 | 1.2 | 15 (Fo±250MHz) | -30 to +85 |
| WLAN2.4 | DFCH22G45HDHAA | 2450 | 100 | 1.0 | 16 (Fo-250MHz) | -30 to +85 |
| WLAN2.4 | DFCH22G48HDHAA | 2484 | 26 | 2.5 | 47 (Fo-270MHz) | -30 to +85 |
| VICS | DFCH22G50HDHAA | 2500 | 4 | 2.4 | 10 (Fo±60MHz) | -30 to +85 |
| MSAT | DFCH31G54HDJAA | 1542 | 34 | 3.0 | 30 (1626.5 to 1660.5MHz) | -30 to +85 |
| MSAT | DFCH31G64HDJAA | 1643.5 | 34 | 3.0 | 30 (1525 to 1559MHz) | -30 to +85 |
| DCS1800 | DFCH31G74HDJAA | 1747.5 | 75 | 2.0 | 8 (Fo±80MHz) | -30 to +85 |
| DCS1800 | DFCH31G84HDJAA | 1842.5 | 75 | 2.0 | 8 (Fo±80MHz) | -30 to +85 |
| PCS1.9 | DFCH31G88HDJAA | 1880 | 60 | 2.2 | 15 (Fo±100MHz) | -30 to +85 |
| W-CDMA | DFCH31G95HDHAA | 1950 | 60 | 1.8 | 45 (1550MHz) | -30 to +85 |
| PCS1.9 | DFCH31G96HDJAA | 1960 | 60 | 2.2 | 15 (Fo±100MHz) | -30 to +85 |
| W-CDMA | DFCH32G14HDHAA | 2140 | 60 | 1.3 | 52 (1325 to 1385MHz) | -30 to +85 |
| MMDS | DFCH32G15HDHAB | 2156 | 20 | 3.0 | 36 (2050MHz) | -35 to +85 |
| WLAN2.4 | DFCH32G44HDHAA | 2442 | 84 | 2.4 | 36 (Fo-250MHz) | -30 to +85 |
| WLAN2.4 | DFCH32G45HDHAA | 2450 | 100 | 2.3 | 36 (Fo-250MHz) | -30 to +85 |
| WLAN2.4 | DFCH32G48HDHAA | 2484 | 26 | 3.0 | 45 (Fo-270MHz) | -30 to +85 |
| DCS1800 | DFCH41G74HDJAA | 1747.5 | 75 | 3.6 | 10 (Fo±57.5MHz) | -30 to +85 |
| DCS1800 | DFCH41G84HDJAA | 1842.5 | 75 | 3.6 | 10 (Fo±57.5MHz) | -30 to +85 |
| PCS1.9 | DFCH41G88HDJAA | 1880 | 60 | 4.5 | 12 (Fo±50MHz) | -30 to +85 |
| PCS1.9 | DFCH41G96HDJAA | 1960 | 60 | 4.5 | 12 (Fo±50MHz) | -30 to +85 |
| MMDS | DFCH42G59HDHAB | 2593 | 186 | 1.8 | 50 (Fo-400MHz) | -35 to +85 |

for RF/Local

Chip Multilayer LC Filters (BPF)



● **LFB18/21/2H/31_SG Series**

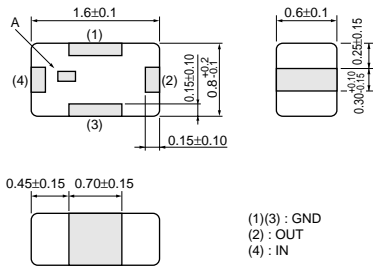

LFB18_SG Series

A : Directional Input Mark
All the technical data and information contained herein are subject to change without prior notice. (in mm)



Frequency Characteristics

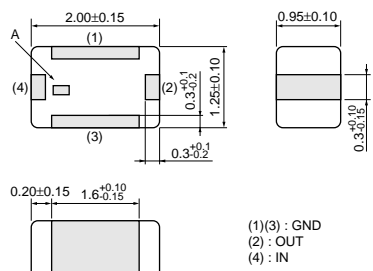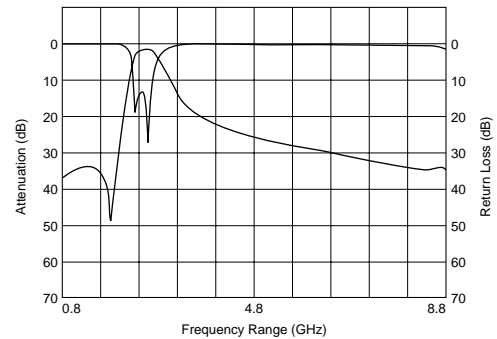

LFB21_SG Series

A : Directional Input Mark
All the technical data and information contained herein are subject to change without prior notice. (in mm)



Frequency Characteristics

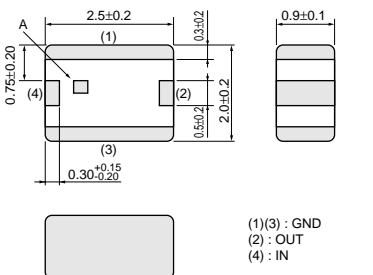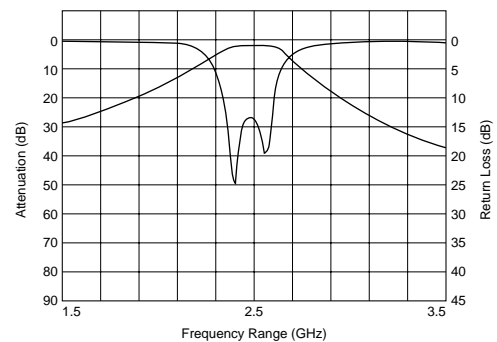

LFB2H_SG Series

A : Directional Input Mark
All the technical data and information contained herein are subject to change without prior notice. (in mm)


Frequency Characteristics

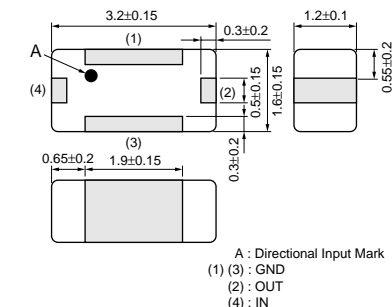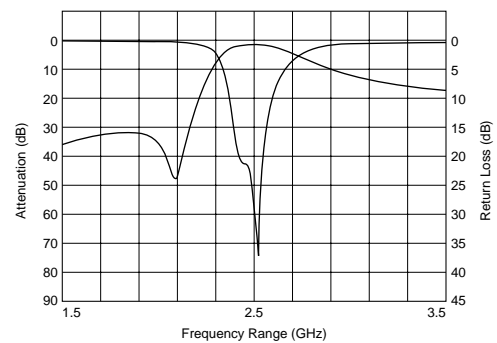

LFB31_SG Series

All the technical data and information contained herein are subject to change without prior notice. (in mm)


Frequency Characteristics

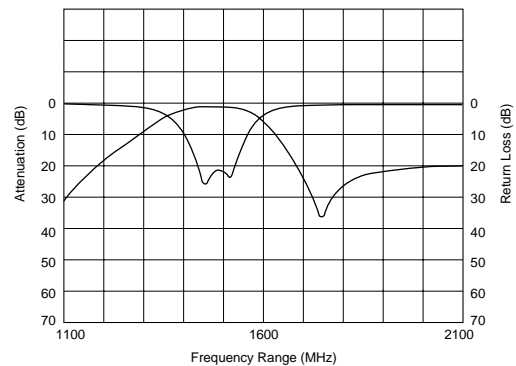


△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I) (dB) | Attenuation (Absolute Value) II) (dB) |
|------------------|-------------------------------------|----------------------|---------------------------|--------------------------------------|---------------------------------------|
| LFB182G45SG9A246 | 2450 | fo±50 | 2.2 max. (at 25°C) | 24.5 min. at 880~960MHz | 12.5 min. at 1710~1990MHz |
| LFB212G45SG8A127 | 2450 | fo±50 | 1.5 max. (at 25°C) | 25 min. at 1200~1300MHz | 10.0 min. at 2000MHz |
| LFB212G45SG8A166 | 2450 | fo±50 | 1.4 max. (at 25°C) | 30 min. at 880~915MHz | 30 min. at 1710~1910MHz |
| LFB212G45SG8A192 | 2450 | fo±50 | 2.6 max. (at 25°C) | 40 min. at 880~960MHz | 38 min. at 1710~1990MHz |
| LFB215G12SG8A178 | 5125 | fo±225 | 1.5 max. (at 25°C) | 25 min. at 4200MHz | 17 min. at 2x(fo±225)MHz |
| LFB215G12SG8A183 | 5125 | fo±225 | 1.5 max. (at 25°C) | 10.0 min. at 4250MHz | 10.0 min. at 5900MHz |
| LFB215G25SG8A144 | 5250 | fo±100.0 | 1.5 max. (at 25°C) | 30 min. at 3450MHz | - |
| LFB215G37SG8A180 | 5375 | fo±475 | 1.8 max. (at 25°C) | 29.5 min. at 500~4000MHz | 34.5 min. at 3450MHz |
| LFB215G37SG8A185 | 5375 | fo±475 | 2.2 max. (at 25°C) | 40 min. at 340~1195MHz | 21 min. at 2140~3580MHz |
| LFB215G51SG8A132 | 5512 | fo±363 | 1.9 max. (at 25°C) | 30 min. at 500~4000MHz | 20 min. at 4600MHz |
| LFB215G51SG8A154 | 5512 | fo±363 | 1.5 max. (at 25°C) | 30 min. at 500~4000MHz | 20 min. at 4600MHz |
| LFB215G78SG8A170 | 5787.5 | fo±62.5 | 2.2 max. (at 25°C) | 35 min. at 3275~3400MHz | 37 min. at 2x(fo±62.5)MHz |
| LFB2H2G45SG7A134 | 2450 | fo±50 | 1.7 max. (at 25°C) | 25 min. at 1750MHz | 25 min. at 2100MHz |
| LFB2H2G45SG7A135 | 2450 | fo±50 | 2.7 max. (at 25°C) | 40 min. at 880~915MHz | 40 min. at 1710~1950MHz |
| LFB2H2G45SG7A158 | 2450 | fo±50 | 1.2 max. (at 25°C) | 30 min. at 880~915MHz | 30 min. at 1710~1785MHz |
| LFB2H2G45SG7A159 | 2450 | fo±50 | 2.1 max. (at 25°C) | 45 min. at 880~915MHz | 48 min. at 1710~1990MHz |
| LFB2H2G45SG7A204 | 2450 | fo±50 | 3 max. (at 25°C) | 45 min. at 880~915MHz | 27 min. at 1710~1990MHz |
| LFB2H5G78SG7A175 | 5787.5 | fo±62.5 | 2.5 max. (at 25°C) | 51.5 min. at 902~928MHz | 41 min. at 3919~4044MHz |
| LFB311G48SG1-985 | 1489 | fo±12.0 | 1.5 max. (at 25°C) | 25 min. at (fo±12.0)+260MHz | 28 min. at 1749MHz |
| LFB311G90SG1-799 | 1906.5 | fo +24.5/-13.5MHz | 2.5 max. (at 25°C) | 40 min. at 1397.05~1422.85MHz | 35 min. at 1645.5~1671.3MHz |
| LFB311G90SG2-797 | 1906.5 | fo±13.5 | 2.7 max. (at 25°C) | 40 min. at 1427~1454MHz | 35 min. at 1660~1687MHz |
| LFB311G95SG3A564 | 1950 | fo±30 | 3.5 max. (at 25°C) | 20 min. at 2110~2170MHz | 25 min. at 2490~2550MHz |
| LFB312G45SG2A509 | 2450 | fo±50 | 2 max. (at 25°C) | 38 min. at 902~928MHz | 15 min. at 2100~2200MHz |
| LFB312G45SG7A572 | 2450 | fo±50 | 2.5 max. (at 25°C) | 37 min. at 902~928MHz | 20 min. at 2100~2200MHz |

● LFB31_SL Series (1206)

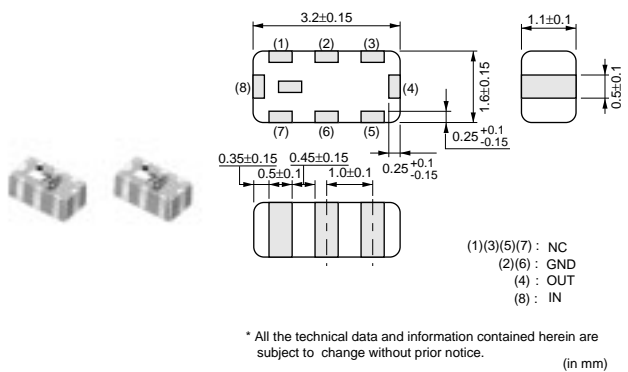


Frequency Characteristics

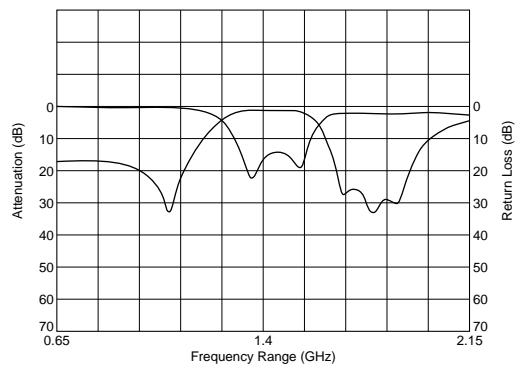

| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I) (dB) | Attenuation (Absolute Value) II) (dB) |
|------------------|-------------------------------------|----------------------|---------------------------|--------------------------------------|---------------------------------------|
| LFB311G40SL1A562 | 1402.5 | fo±77.5 | 3 max. (at 25°C) | 20 min. at 1005~1080MHz | 20 min. at 1725~1760MHz |


△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● LFB31_SN Series (1206)

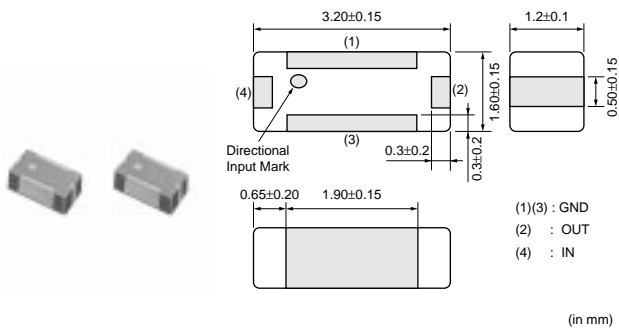


All the technical data and information contained herein are subject to change without prior notice.

Frequency Characteristics

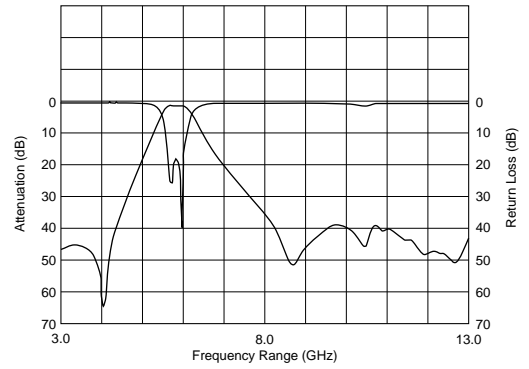


| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I) (dB) | Attenuation (Absolute Value) II) (dB) |
|------------------|-------------------------------------|----------------------|---------------------------|--------------------------------------|---------------------------------------|
| LFB315G82SN5-996 | 5820 | fo±30 | 2 max. (at 25°C) | 35 min. at 2000MHz | 30 min. at 3000MHz |

● LFB31_SP Series (1206)

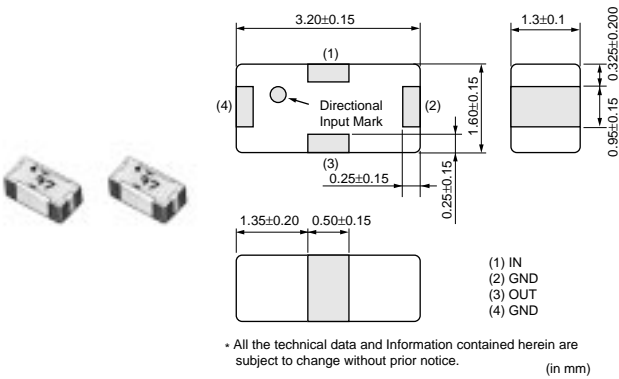

All the technical data and information contained herein are subject to change without prior notice.


Frequency Characteristics

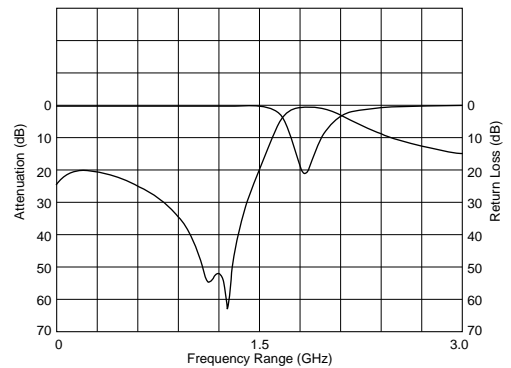


| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I) (dB) | Attenuation (Absolute Value) II) (dB) |
|------------------|-------------------------------------|----------------------|---------------------------|--------------------------------------|---------------------------------------|
| LFB311G89SP1A542 | 1890 | fo±10.0 | 0.85 max. (at 25°C) | 29 min. at 1416.9~1436.9Hz | 22 min. at 900MHz |
| LFB311G90SP1-798 | 1906.5 | fo±13.5 | 1.0 max. (at 25°C) | 38 min. at 1405~1440MHz | 12.0 min. at 1649~1680MHz |
| LFB312G45SP1A502 | 2450 | fo±50 | 1.4 max. (at 25°C) | 20 min. at 902~928MHz | 35 min. at 1500~1550MHz |

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● LFB32_SA Series (1210)

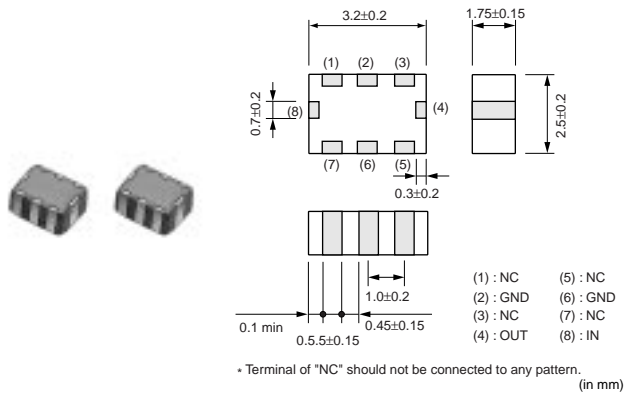


Frequency Characteristics

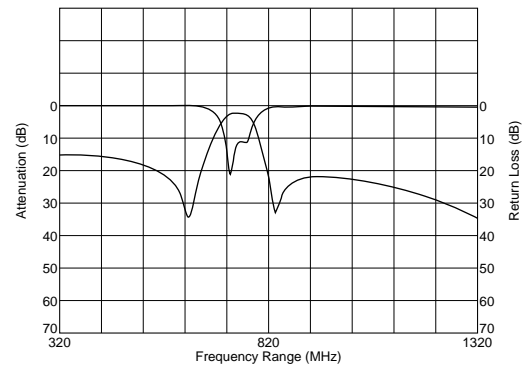


| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I) (dB) | Attenuation (Absolute Value) II) (dB) |
|------------------|-------------------------------------|----------------------|---------------------------|--------------------------------------|---------------------------------------|
| LFB32741MSA1-744 | 741.5 | fo±19.5 | 3.5 max. (at 25°C) | 20 min. at 612~650MHz | 20 min. at 832~870MHz |
| LFB32836MSA1-747 | 836.5 | fo±12.5 | 3 max. (at 25°C) | 19.5 min. at fo±77.5MHz | - |
| LFB32851MSA1A540 | 851 | fo±19 | 3.5 max. (at 25°C) | 20 min. at fo-90.0MHz | 18 min. at fo+90.0MHz |
| LFB32881MSA1-781 | 881.5 | fo±12.5 | 4.8 max. (at 25°C) | 11.0 min. at 824~837MHz | 5 min. at 846~849MHz |
| LFB32881MSA1A556 | 881.5 | fo±12.5 | 3.2 max. (at 25°C) | 20 min. at fo±77.5MHz | - |
| LFB32902MSA1A536 | 902.5 | fo±12.5 | 3 max. (at 25°C) | 15 min. at 802~827MHz | 15 min. at 978~1003MHz |
| LFB32906MSA1A539 | 906 | fo±19 | 3.5 max. (at 25°C) | 20 min. at fo-90.0MHz | 18 min. at fo+90.0MHz |
| LFB32947MSA1A537 | 947 | fo±12.5 | 3 max. (at 25°C) | 9 min. at D.C.~835MHz | 6 min. at 1000~1394MHz |
| LFB32991MSA1-762 | 991.15 | fo±12.5 | 3 max. (at 25°C) | 20 min. at 869~894MHz | 20 min. at 1088.3~1113.3MHz |
| LFB321G44SA1A538 | 1441.0 | fo±12.0 | 3 max. (at 25°C) | 25 min. at 1607~1631MHz | - |
| LFB321G61SA1A555 | 1619 | fo±12.0 | 2.8 max. (at 25°C) | 20 min. at 1477~1501MHz | 16 min. at 1429~1453MHz |

● LFB32_SB Series (1210)

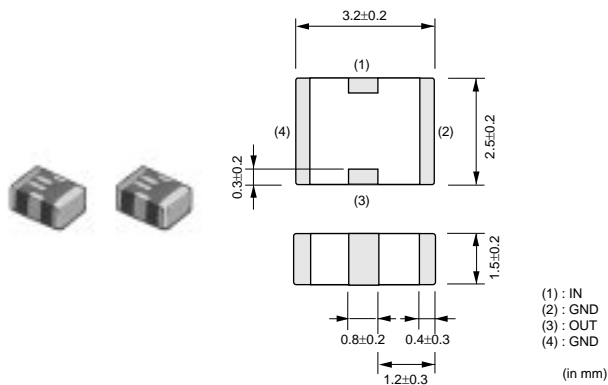


Frequency Characteristics

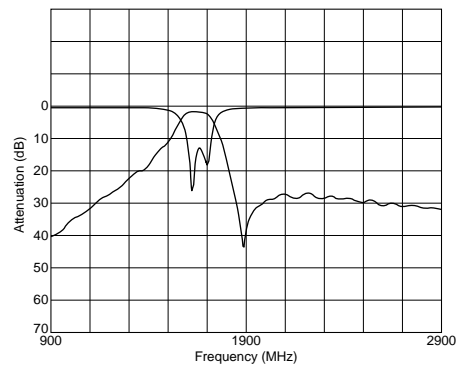


| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I) (dB) | Attenuation (Absolute Value) II) (dB) |
|------------------|-------------------------------------|----------------------|---------------------------|--------------------------------------|---------------------------------------|
| LFB321G66SB1-560 | 1662 | fo±12.5 | 2 max. (at 25°C) | 27 min. at 1895~1918MHz | 20 min. at 2xfo MHz |
| LFB321G89SB1-591 | 1890 | fo±10.0 | 1.2 max. (at 25°C) | 21 min. at 1655~1675MHz | 15 min. at 2xfo MHz |
| LFB321G90SB1-559 | 1907.5 | fo±12.5 | 1.0 max. (at 25°C) | 35 min. at 1397.5~1440MHz | 20 min. at 1646~1680MHz |

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● LFB32_SC Series (1210)

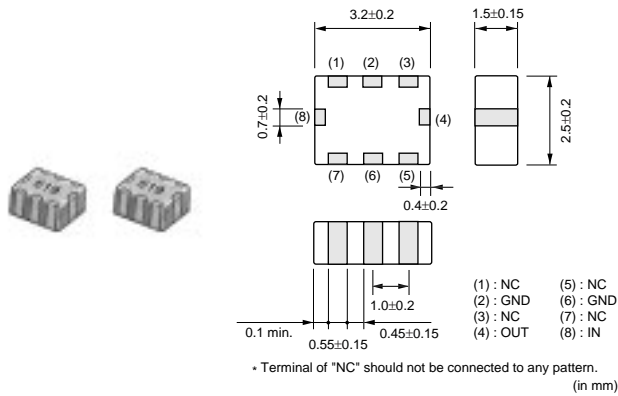


Frequency Characteristics

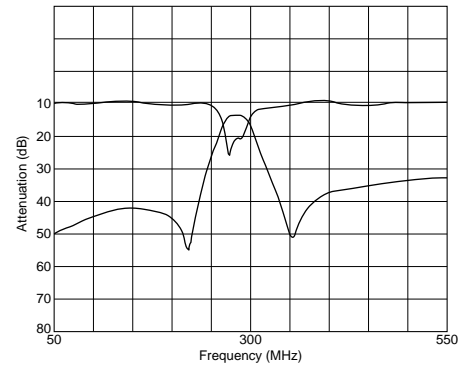


| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I) (dB) | Attenuation (Absolute Value) II) (dB) |
|------------------|-------------------------------------|----------------------|---------------------------|--------------------------------------|---------------------------------------|
| LFB32284MSC1-596 | 284 | fo±4 | 3.8 max. (at 25°C) | 31 min. at 220~228MHz | 23 min. at 340~348MHz |
| LFB32312MSC1-597 | 312.25 | fo±1.0 | 3.5 max. (at 25°C) | 26 min. at 249.8MHz | 26 min. at 374.7MHz |
| LFB32315MSC1-604 | 315 | fo±0.5 | 3.5 max. (at 25°C) | 45 min. at 180MHz | 29 min. at 470MHz |
| LFB32315MSC1-619 | 315 | fo±0 | 3.5 max. (at 25°C) | 30 min. at 235MHz | 30 min. at 395MHz |
| LFB32426MSC1-603 | 426.5 | fo±0.5 | 3.6 max. (at 25°C) | 25 min. at 366.5MHz | 20 min. at 486.5MHz |
| LFB32820MSC2-749 | 820 | fo±10.0 | 1.3 max. (at 25°C) | 22 min. at 1070~1090MHz | - |
| LFB32847MSC2-766 | 847.5 | fo±37.5 | 1.5 max. (at 25°C) | 16 min. at 550~625MHz | 15 min. at 1070~1145MHz |

● LFB32_SJ Series (1210)

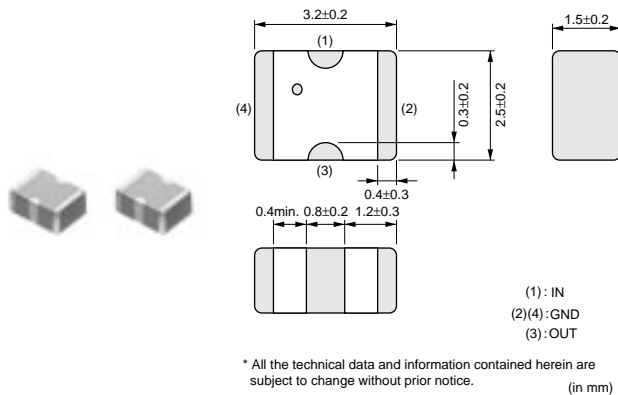


Frequency Characteristics

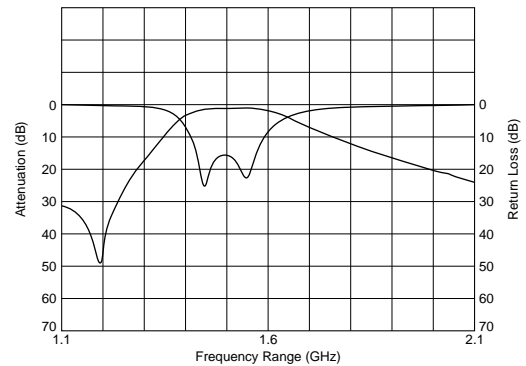


| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I) (dB) | Attenuation (Absolute Value) II) |
|------------------|-------------------------------------|----------------------|---------------------------|--------------------------------------|----------------------------------|
| LFB321G47SJ1-794 | 1472 | fo±20 | 1.3 max. (at 25°C) | 30 min. at 1172MHz | - |

● LFB32_SK Series (1210)

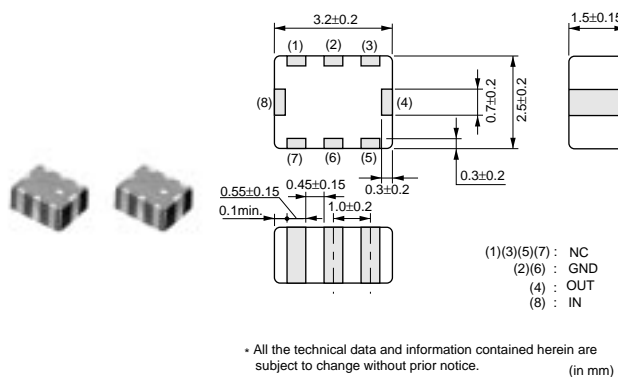

Frequency Characteristics


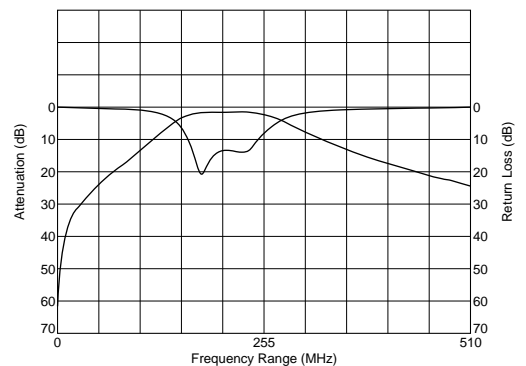


△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I (dB) | Attenuation (Absolute Value) II (dB) |
|-------------------------|-------------------------------------|----------------------|---------------------------|-------------------------------------|--------------------------------------|
| LFB32205MSK1-948 | 205.5 | fo±31.5 | 1.5 max. (at 25°C) | 10.0 min. at 100MHz | 20 min. at 500MHz |

● LFB32_SN Series (1210)

Frequency Characteristics

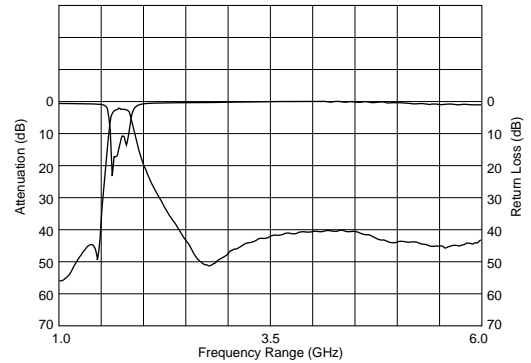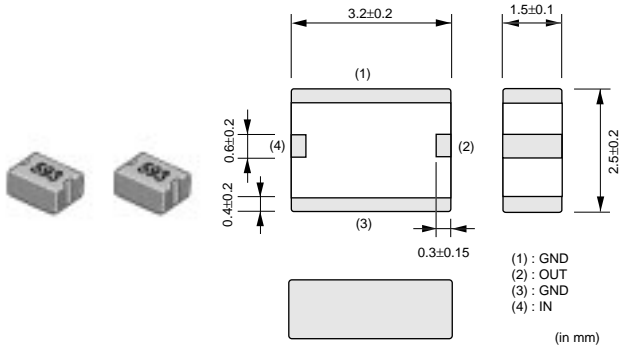


| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I (dB) | Attenuation (Absolute Value) II (dB) |
|-------------------------|-------------------------------------|----------------------|---------------------------|-------------------------------------|--------------------------------------|
| LFB321G74SN1-770 | 1747.5 | fo±37.5 | 2.5 max. (at 25°C) | 20 min. at D.C.~1350MHz | 30 min. at 1350~1425MHz |
| LFB321G84SN1-796 | 1842.5 | fo±37.5 | 2.5 max. (at 25°C) | 48 min. at 500~1450MHz | 40 min. at 1450~1480MHz |
| LFB321G90SN1-593 | 1907.5 | fo±12.5 | 2.5 max. (at 25°C) | 40 min. at 1406.5~1440MHz | 35 min. at 1655~1680MHz |
| LFB322G45SN1-947 | 2450 | fo±50 | 2.5 max. (at 25°C) | 40 min. at 1950MHz | 16 min. at 2200MHz |
| LFB322G45SN1A504 | 2450 | fo±50 | 1.8 max. (at 25°C) | 48 min. at 902~928MHz | 50 min. at 1500~1550MHz |
| LFB322G45SN5A515 | 2450 | fo±50 | 2.5 max. (at 25°C) | 40 min. at 880~1250MHz | 20 min. at 1250~1710MHz |

for RF/Local

Chip Multilayer LC Filters (LPF)

● LFL15_TC (0402) /LFL18_TC (0603) /LFL21_TC (0805) Series

Frequency Characteristics

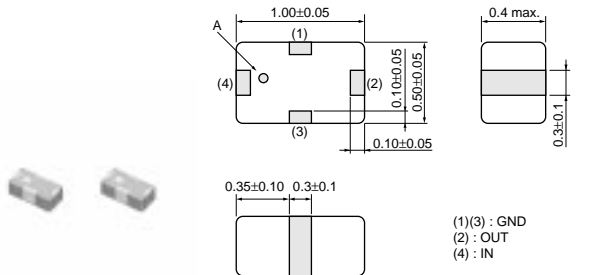


LFL15_TC Series

A : Directional Input Mark

All the technical data and information contained herein are subject to change without prior notice.

(in mm)

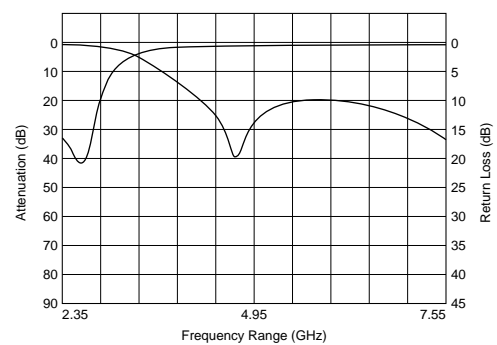


Continued on the following page.


Continued from the preceding page.




LFL18_TC Series

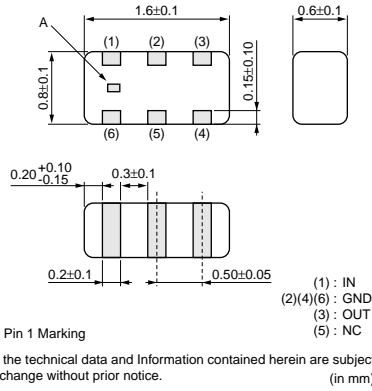


Frequency Characteristics

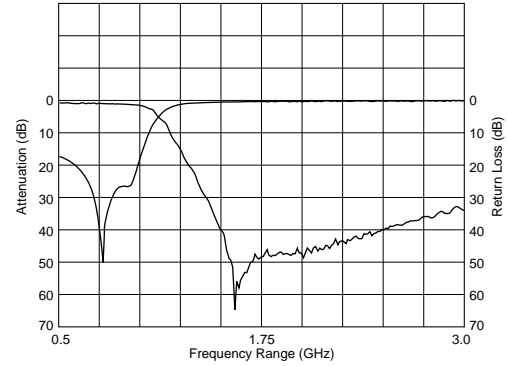

LFL21_TC Series

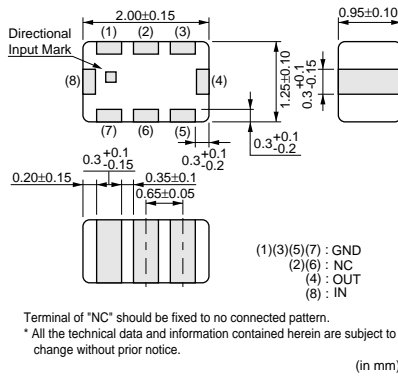

Frequency Characteristics

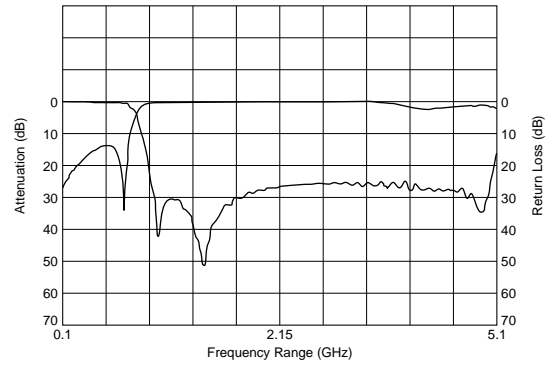


| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I) (dB) | Attenuation (Absolute Value) II) (dB) |
|------------------|-------------------------------------|----------------------|---------------------------|--------------------------------------|---------------------------------------|
| LFL152G45TC1A219 | 2450 | fo±50 | 0.45 max. (at 25°C) | 21 min. at 2x(fo±50.0)MHz | 21 min. at 3x(fo±50.0)MHz |
| LFL18815MTC2A072 | 815.5 | fo±9.5 | 0.80 max. (at 25°C) | 35 min. at 2x(fo±9.5)MHz | 30 min. at 3x(fo±9.5)MHz |
| LFL18924MTC1A052 | 924.5 | fo±35 | 0.40 max. (at 25°C) | 20 min. at 2x(fo±35.0)MHz | 15 min. at 3x(fo±35.0)MHz |
| LFL182G45TC1A108 | 2450 | fo±50 | 0.37 max. (at 25°C) | 27 min. at 4800~5000MHz | 25 min. at 7200~7500MHz |
| LFL182G45TC1A202 | 2450 | fo±50 | 0.40 max. (at 25°C) | 27 min. at 4800~5000MHz | 30 min. at 7200~7500MHz |
| LFL21600MTC1A002 | 600 | fo±250 | 1.37 max. (at 25°C) | 20 min. at 1550~4250MHz | 9 min. at 1100MHz |
| LFL21847MTC1A006 | 847.5 | fo±37.5 | 0.75 max. (at 25°C) | 30 min. at 2x(fo±37.5)MHz | 30 min. at 3x(fo±37.5)MHz |
| LFL21902MTC1A018 | 902.5 | fo±12.5 | 0.6 max. (at 25°C) | 30 min. at 2x(fo±12.5)MHz | 30 min. at 3x(fo±12.5)MHz |
| LFL211G35TC1A001 | 1350.0 | fo±250 | 0.92 max. (at 25°C) | 25 min. at 2300~5000MHz | - |
| LFL211G44TC1A014 | 1441.0 | fo±12.0 | 0.47 max. (at 25°C) | 31 min. at 2xfoMHz | 26 min. at 3xfoMHz |
| LFL211G79TC1A011 | 1795 | fo±85 | 0.47 max. (at 25°C) | 30 min. at 2x(1747.5±37.5)MHz | 25 min. at 2x(1842.5±37.5)MHz |
| LFL211G89TC1A015 | 1890 | fo±10.0 | 0.47 max. (at 25°C) | 30 min. at 2x(fo±10.0)MHz | 26 min. at 3x(fo±10.0)MHz |
| LFL211G90TC1A008 | 1907.5 | fo±12.5 | 0.47 max. (at 25°C) | 30 min. at 2x(fo±12.5)MHz | 25 min. at 3x(fo±12.5)MHz |
| LFL211G92TC1A060 | 1920 | fo±70 | 0.6 max. (at 25°C) | 24 min. at 3335~3700MHz | 30 min. at 3700~3820MHz |
| LFL212G45TC1A007 | 2450 | fo±50 | 0.50 max. (at 25°C) | 27 min. at 2x(fo±50.0)MHz | 30 min. at 3x(fo±50.0)MHz |
| LFL215G25TC1A156 | 5250 | fo±100.0 | 0.70 max. (at 25°C) | 24 min. at 2x(fo±100)MHz | 19 min. at 3x(fo±100)MHz |
| LFL215G37TC1A210 | 5375 | fo±475 | 0.70 max. (at 25°C) | 30 min. at 2x(fo±475)MHz | 20 min. at 3x(fo±475)MHz |
| LFL215G51TC1A149 | 5512 | fo±363 | 0.70 max. (at 25°C) | 30 min. at 2x(fo±363)MHz | 20 min. at 3x(fo±363)MHz |
| LFL215G78TC1A155 | 5787.5 | fo±62.5 | 0.70 max. (at 25°C) | 30 min. at 2x(fo±62.5)MHz | 20 min. at 3x(fo±62.5)MHz |

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.


for RF/Local

Chip Multilayer LC Filters (HPF)

● LFH32_RA Series (1210)

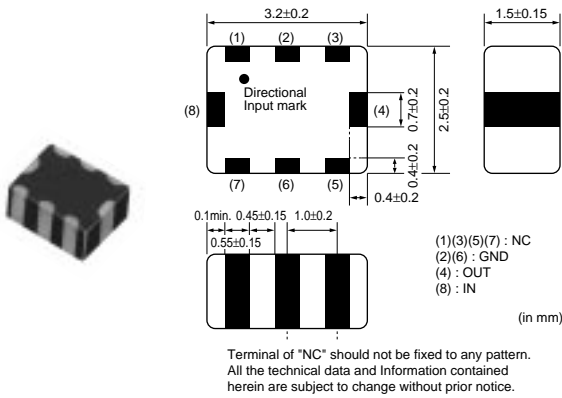


Frequency Characteristics

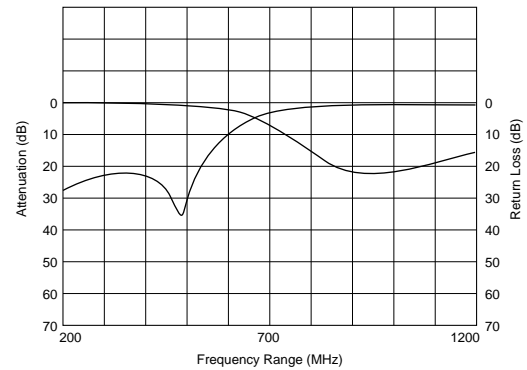


| Part Number | Nominal Center Frequency (fo) (MHz) | Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) I (dB) | Attenuation (Absolute Value) II (dB) |
|------------------|-------------------------------------|----------------------|---------------------------|-------------------------------------|--------------------------------------|
| LFH32942MRA1A517 | 942.5 | fo±17.5 | 0.5 max. (at 25°C) | 4.5 min. at 480~600MHz | 25 min. at 480MHz |

for RF/Local

Chip Multilayer Diplexers

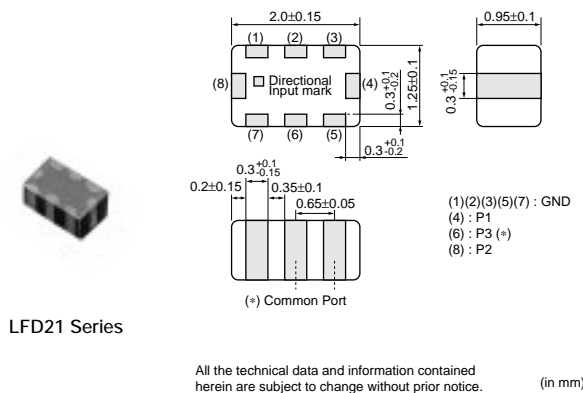

LFD21 Series

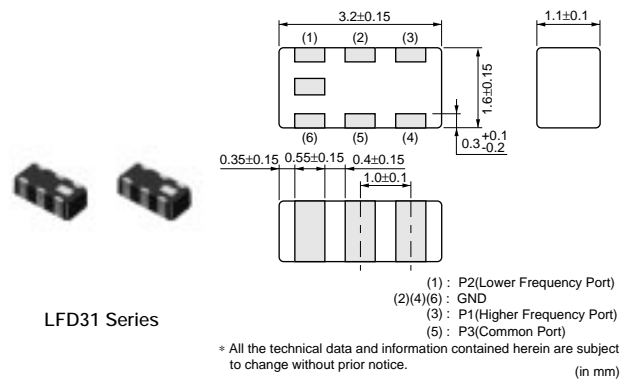

LFD31 Series


| Part Number | Frequency Range[P1](f1) (MHz) | Frequency Range[P2](f2) (MHz) | Insertion Loss [P1-P3](in f1) (dB) | Insertion Loss [P2-P3](in f2) (dB) | Attenuation [P1-P3](in f2) (dB) | Attenuation [P2-P3](in f1) (dB) |
|------------------|-------------------------------|-------------------------------|------------------------------------|------------------------------------|---------------------------------|---------------------------------|
| LFD212G45DP3A140 | 5250 ±100.0MHz | 2450 ±50.0MHz | 0.65 max. (at 25°C) | 0.50 max. (at 25°C) | 20 min. | 20 min. |
| LFD212G45DP3A151 | 5487.5 ±337.5MHz | 2450 ±50.0MHz | 0.75 max. (at 25°C) | 0.50 max. (at 25°C) | 20 min. | 16 min. |
| LFD212G45DP3A188 | 5375 ±475.0MHz | 2450 ±50.0MHz | 0.75 max. (at 25°C) | 0.50 max. (at 25°C) | 21 min. | 17 min. |
| LFD212G45DP4A189 | 2450 ±50.0MHz | 5375 ±475.0MHz | 0.5 max. (at 25°C) | 0.75 max. (at 25°C) | 17 min. | 21 min. |
| LFD21859MDP1A049 | 1920 ±70.0MHz | 859 ±35.0MHz | 0.45 max. (at 25°C) | 0.40 max. (at 25°C) | 19 min. | 20 min. |
| LFD21884MDP1A062 | 1906.5 ±13.0MHz | 884 ±74.0MHz | 0.45 max. (at 25°C) | 0.50 max. (at 25°C) | 20 min. | 20 min. |
| LFD21920MDP1A048 | 1795 ±85.0MHz | 920 ±40.0MHz | 0.55 max. (at 25°C) | 0.50 max. (at 25°C) | 20 min. | 16 min. |
| LFD31859MDP1A009 | 1920 ±70.0MHz | 859 ±35.0MHz | 0.45 max. (at 25°C) | 0.40 max. (at 25°C) | 20 min. | 20 min. |
| LFD31884MDP1A030 | 1906.5 ±13.0MHz | 884 ±74.0MHz | 0.45 max. (at 25°C) | 0.50 max. (at 25°C) | 19 min. | 19 min. |
| LFD31897MDP1A010 | 1810 ±100.0MHz | 897.5 ±17.5MHz | 0.6 max. (at 25°C) | 0.5 max. (at 25°C) | 20 min. | 17 min. |
| LFD31920MDP1A003 | 1795 ±85.0MHz | 920 ±40.0MHz | 0.55 max. (at 25°C) | 0.50 max. (at 25°C) | 20 min. | 16 min. |
| LFD31920MDP1A040 | 1850 ±140.0MHz | 920 ±40.0MHz | 0.65 max. (at 25°C) | 0.50 max. (at 25°C) | 20 min. | 15 min. |
| LFD31993MDP1A032 | 2072.34 ±30.0MHz | 993.84 ±12.5MHz | 0.4 max. (at 25°C) | 0.4 max. (at 25°C) | 20 min. | 20 min. |

7 Filters for Communication Equipment

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

for RF/Local

Chip Multilayer LC Filters (Trap)

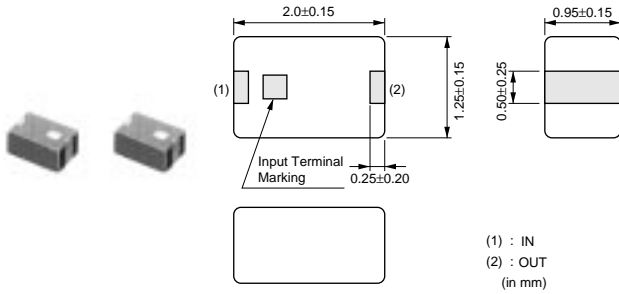


| Part Number | Center Frequency of Rejection Band (MHz) | Pass Bandwidth (BW) (MHz) | Insertion Loss in BW (dB) | Attenuation (Absolute Value) (dB) |
|------------------|--|---------------------------|---------------------------|-----------------------------------|
| LFE21560MFA1A004 | 560 | 810-885 | 0.7 max. (at 25°C) | 10.0 min. at 550-570MHz |

for RF/Local

SAW Filters



● GPS

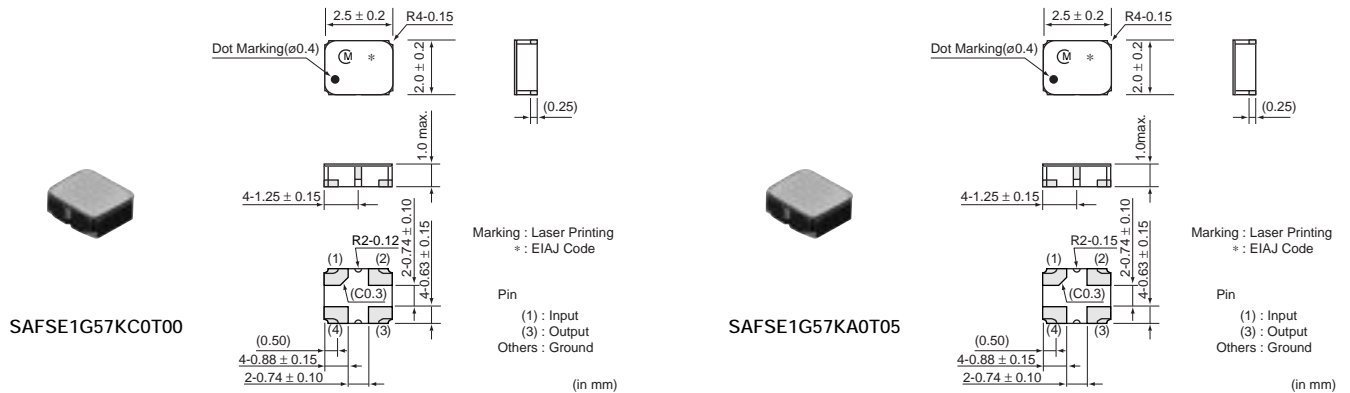

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|-----------------|------------------------|-------------------------------------|--------------------------------|------------------------------------|-----------------|------------------|
| SAFSE1G57KC0T00 | 1575.5 | 2.5 max. (1574MHz-1577MHz) | 0.7 (1574MHz-1577MHz) | 1.6max (1574MHz-1577MHz) | 50ohm | 50ohm |
| SAFSD1G57FA0T00 | 1575.5 | 1.6 max. (1574MHz-1577MHz) | 0.5 (1574MHz-1577MHz) | 1.6max. (1574MHz-1577MHz) | 50ohm | 100ohm |
| SAFSE1G57KA0T05 | 1575.5 | 1.6 max. (1574MHz-1577MHz) | 0.7 (1574MHz-1577MHz) | 1.6max. (1574MHz-1577MHz) | 50ohm | 50ohm |
| SAFSE1G57KA0T09 | 1575.42 | 2.0 max. (1574.42MHz-1576.42MHz) | 1.5 (1574.42MHz-1576.42MHz) | 1.8max. (1574.42MHz-1576.42MHz) | 50ohm | 50ohm |

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● GSM850

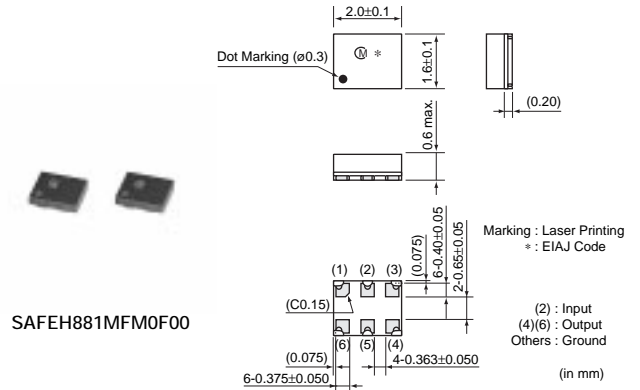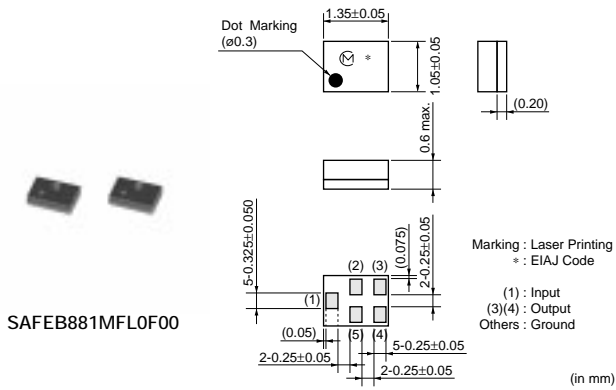

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|------------------------|------------------------|-----------------------------|------------------------|----------------------------|-----------------|------------------|
| SAFEB881MFL0F00 | 881.5 | 2.3 max. (869MHz-894MHz) | 1.2 (869MHz-894MHz) | 1.8max. (869MHz-894MHz) | 50ohm | 150ohm//82nH |
| SAFEH881MFM0F00 | 881.5 | 2.4 max. (869MHz-894MHz) | 1.5 (869MHz-894MHz) | 1.9max. (869MHz-894MHz) | 50ohm | 150ohm//82nH |
| SAFEB881MAL0F00 | 881.5 | 2.6 max. (869MHz-894MHz) | 1.4 (869MHz-894MHz) | 1.7max. (869MHz-894MHz) | 50ohm | 50ohm |
| SAFED881MFL0F05 | 881.5 | 1.9 max. (869MHz-894MHz) | 1.0 (869MHz-894MHz) | 1.8max. (869MHz-894MHz) | 50ohm | 150ohm//68nH |
| SAFSD881MFL0T50 | 881.5 | 3.0 max. (869MHz-894MHz) | 1.4 (869MHz-894MHz) | 2.0max. (869MHz-894MHz) | 50ohm | 200ohm//82nH |


7

Filters for Communication Equipment

● GSM850/GSM900 Dual Band

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|-------------------------------|------------------------|-----------------------------|------------------------|----------------------------|-----------------|------------------|
| SAWES881MCQ0F00(942.5) | 942.5 | 2.9 max. (925MHz-960MHz) | 1.7 (925MHz-960MHz) | 2.2max. (925MHz-960MHz) | 50ohm | 150ohm//56nH |
| SAWES881MCQ0F00(881.5) | 881.5 | 2.1 max. (869MHz-894MHz) | 1.0 (869MHz-894MHz) | 1.9max. (869MHz-894MHz) | 50ohm | 150ohm//68nH |

● GSM850/GSM1900 Dual Band

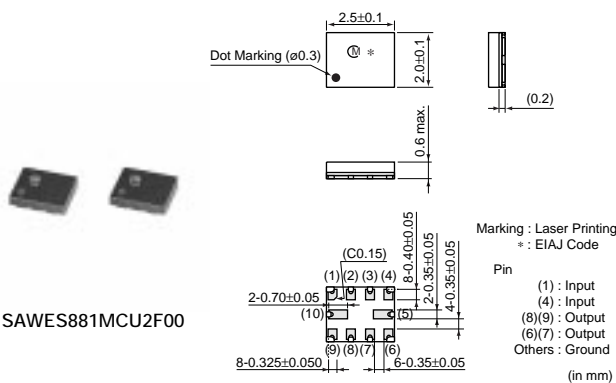

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|-------------------------------|------------------------|-------------------------------|--------------------------|------------------------------|-----------------|------------------|
| SAWES881MCU2F00(881.5) | 881.5 | 2.1 max. (869MHz-894MHz) | 1.0 (869MHz-894MHz) | 1.9max. (869MHz-894MHz) | 50ohm | 150ohm//68nH |
| SAWES881MCU2F00(1960) | 1960 | 3.0 max. (1930MHz-1990MHz) | 1.9 (1930MHz-1990MHz) | 2.4max. (1930MHz-1990MHz) | 50ohm | 150ohm//22nH |



Continued on the following page.

Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

Continued from the preceding page.



| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|-------------------------------|------------------------|-------------------------------|--------------------------|------------------------------|-----------------|------------------|
| SAWSP881MGA0T00(881.5) | 881.5 | 2.9 max. (869MHz-894MHz) | 1.5 (869MHz-894MHz) | 2.0max. (869MHz-894MHz) | 50ohm | 50ohm |
| SAWSP881MGA0T00(1960) | 1960 | 3.2 max. (1930MHz-1990MHz) | 2.0 (1930MHz-1990MHz) | 2.4max. (1930MHz-1990MHz) | 50ohm | 50ohm |
| SAWSU881MCQ0T01(881.5) | 881.5 | 3.0 max. (869MHz-894MHz) | 1.8 (869MHz-894MHz) | 2.0max. (869MHz-894MHz) | 50ohm | 200ohm//56nH |
| SAWSU881MCQ0T01(1960) | 1960 | 3.0 max. (1930MHz-1990MHz) | 2.4 (1930MHz-1990MHz) | 2.2max. (1930MHz-1990MHz) | 50ohm | 200ohm//15nH |

● GSM900

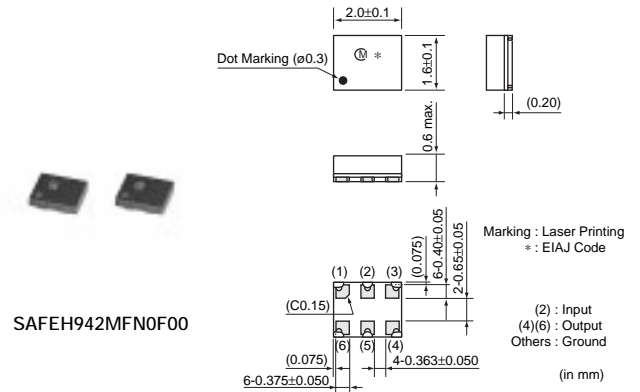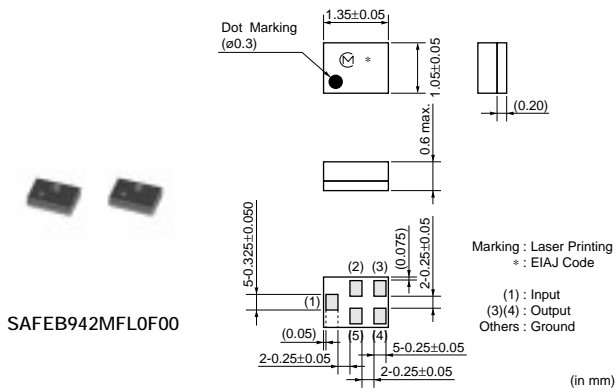

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|------------------------|------------------------|-----------------------------|------------------------|----------------------------|-----------------|------------------|
| SAFEB942MFL0F00 | 942.5 | 2.7 max. (925MHz-960MHz) | 1.7 (925MHz-960MHz) | 2.0max. (925MHz-960MHz) | 50ohm | 150ohm//82nH |
| SAFED942MFM0F00 | 942.5 | 2.2 max. (925MHz-960MHz) | 1.3 (925MHz-960MHz) | 2.1max. (925MHz-960MHz) | 50ohm | 150ohm//82nH |
| SAFEH942MFN0F00 | 942.5 | 2.7 max. (925MHz-960MHz) | 1.8 (925MHz-960MHz) | 2.0max. (925MHz-960MHz) | 50ohm | 150ohm//82nH |
| SAFEF942MAL0F00 | 942.5 | 3.0 max. (925MHz-960MHz) | 1.7 (925MHz-960MHz) | 2.1max. (925MHz-960MHz) | 50ohm | 50ohm |
| SAFSD942MFM0T00 | 942.5 | 3.2 max. (925MHz-960MHz) | 2.2 (925MHz-960MHz) | 2.3max. (925MHz-960MHz) | 50ohm | 200ohm//82nH |
| SAFSD942MCL0T00 | 942.5 | 3.3 max. (925MHz-960MHz) | 1.8 (925MHz-960MHz) | 2.0max. (925MHz-960MHz) | 50ohm | 50ohm |
| SAFSE942MAL0T05 | 942.5 | 3.2 max. (925MHz-960MHz) | 2.0 (925MHz-960MHz) | 2.2max. (925MHz-960MHz) | 50ohm | 50ohm |

● GSM900/GSM1800 Dual Band J-CDMA

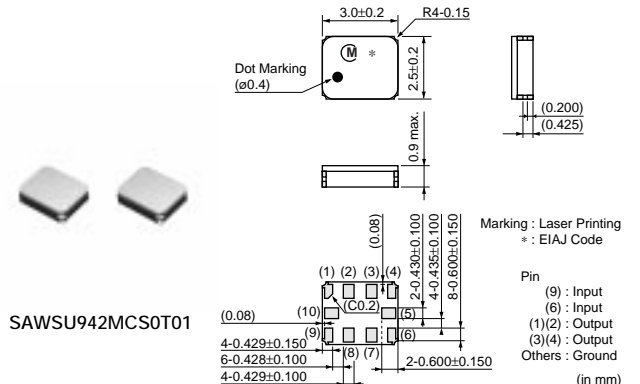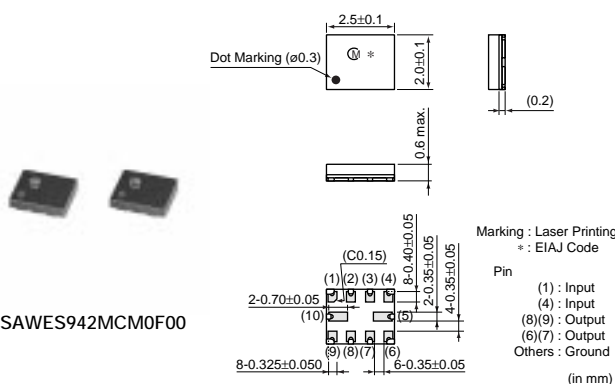

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.


| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|--------------------------------|------------------------|-------------------------------|--------------------------|------------------------------|-----------------|------------------|
| SAWES942MCQ0F00(942.5) | 942.5 | 2.9 max. (925MHz-960MHz) | 1.7 (925MHz-960MHz) | 2.2max. (925MHz-960MHz) | 50ohm | 150ohm//56nH |
| SAWES942MCQ0F00(1842.5) | 1842.5 | 2.6 max. (1805MHz-1880MHz) | 1.7 (1805MHz-1880MHz) | 2.4max. (1805MHz-1880MHz) | 50ohm | 150ohm//15nH |
| SAWES942MCM0F00(942.5) | 942.5 | 2.8 max. (925MHz-960MHz) | 1.5 (925MHz-960MHz) | 2.0max. (925MHz-960MHz) | 50ohm | 150ohm//56nH |
| SAWES942MCM0F00(1842.5) | 1842.5 | 3.0 max. (1805MHz-1880MHz) | 1.8 (1805MHz-1880MHz) | 2.2max. (1805MHz-1880MHz) | 50ohm | 150ohm//18nH |
| SAWES942MCQ0F05(942.5) | 942.5 | 2.9 max. (925MHz-960MHz) | 1.7 (925MHz-960MHz) | 2.2max. (925MHz-960MHz) | 50ohm | 150ohm//56nH |
| SAWES942MCQ0F05(1842.5) | 1842.5 | 2.6 max. (1805MHz-1880MHz) | 1.7 (1805MHz-1880MHz) | 2.4max. (1805MHz-1880MHz) | 50ohm | 150ohm//15nH |
| SAWSP942MLD0T00(942.5) | 942.5 | 3.0 max. (925MHz-960MHz) | 2.0 (925MHz-960MHz) | 2.5max. (925MHz-960MHz) | 50ohm | 50ohm |
| SAWSP942MLD0T00(1842.5) | 1842.5 | 3.2 max. (1805MHz-1880MHz) | 2.0 (1805MHz-1880MHz) | 2.5max. (1805MHz-1880MHz) | 50ohm | 50ohm |
| SAWSU942MCS0T01(942.5) | 942.5 | 3.2 max. (925MHz-960MHz) | 2.2 (925MHz-960MHz) | 2.4max. (925MHz-960MHz) | 50ohm | 200ohm//47nH |
| SAWSU942MCS0T01(1842.5) | 1842.5 | 3.2 max. (1805MHz-1880MHz) | 2.2 (1805MHz-1880MHz) | 2.5max. (1805MHz-1880MHz) | 50ohm | 200ohm//16nH |

7


● GSM1800

Filters for Communication Equipment


SAFEB1G84FA0F00

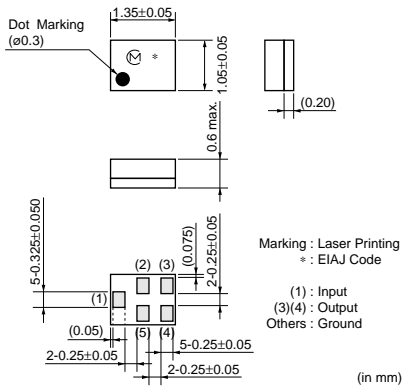

SAFED1G84FB0F00

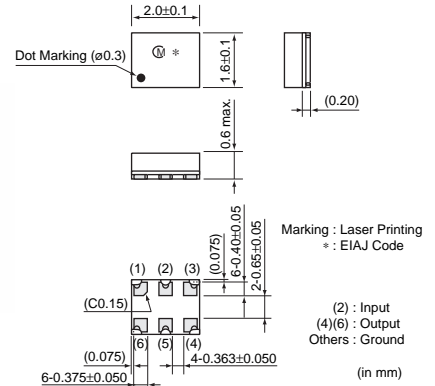

SAFCC1G74KA0T00

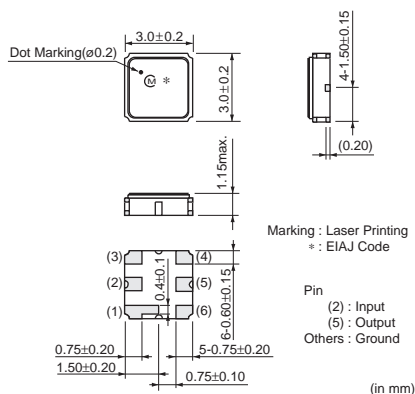

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|------------------------|------------------------|----------------------------|--------------------------|------------------------------|-----------------|------------------|
| SAFEB1G84FA0F00 | 1842.5 | 2.5 max. (1805-1880MHz) | 1.5 (1805MHz-1880MHz) | 2.2max. (1805MHz-1880MHz) | 50ohm | 150ohm//18nH |
| SAFED1G84FB0F00 | 1842.5 | 2.0 max. (1805-1880MHz) | 1.3 (1805MHz-1880MHz) | 2.5max. (1805MHz-1880MHz) | 50ohm | 150ohm//18nH |

Continued on the following page.

Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.


Continued from the preceding page.

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|------------------------|------------------------|-------------------------------|--------------------------|------------------------------|-----------------|------------------|
| SAFEH1G84FB0F00 | 1842.5 | 2.5 max. (1805-1880MHz) | 1.5 (1805MHz-1880MHz) | 2.2max. (1805MHz-1880MHz) | 50ohm | 150ohm//18nH |
| SAFEE1G84AA0F00 | 1842.5 | 2.8 max. (1805-1880MHz) | 1.7 (1805MHz-1880MHz) | 2.2max. (1805MHz-1880MHz) | 50ohm | 50ohm |
| SAFSE1G84KA0T00 | 1842.5 | 3.2 max. (1805-1880MHz) | 2.2 (1805MHz-1880MHz) | 2.8max. (1805MHz-1880MHz) | 50ohm | 50ohm |
| SAFSD1G84FA0T00 | 1842.5 | 3.0 max. (1805-1880MHz) | 2.0 (1805MHz-1880MHz) | 2.7max. (1805MHz-1880MHz) | 50ohm | 200ohm//27nH |
| SAFSD1G84CB0T00 | 1842.5 | 3.8 max. (1805-1880MHz) | 2.0 (1805MHz-1880MHz) | 2.7max. (1805MHz-1880MHz) | 50ohm | 50ohm |
| SAFCC1G74KA0T00 | 1747.5 | 4.2 max. (1710MHz-1785MHz) | 2.6 (1710MHz-1785MHz) | 2.5max. (1710MHz-1785MHz) | 50ohm | 50ohm |

● GSM1800/GSM1900 Dual Band

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|--------------------------------|------------------------|-------------------------------|--------------------------|------------------------------|-----------------|------------------|
| SAWES1G84CQ0F00(1960) | 1960 | 3.0 max. (1930MHz-1990MHz) | 1.9 (1930MHz-1990MHz) | 2.4max. (1930MHz-1990MHz) | 50ohm | 150ohm//22nH |
| SAWES1G84CQ0F00(1842.5) | 1842.5 | 2.6 max. (1805MHz-1880MHz) | 1.7 (1805MHz-1880MHz) | 2.4max. (1805MHz-1880MHz) | 50ohm | 150ohm//15nH |


● GSM1900

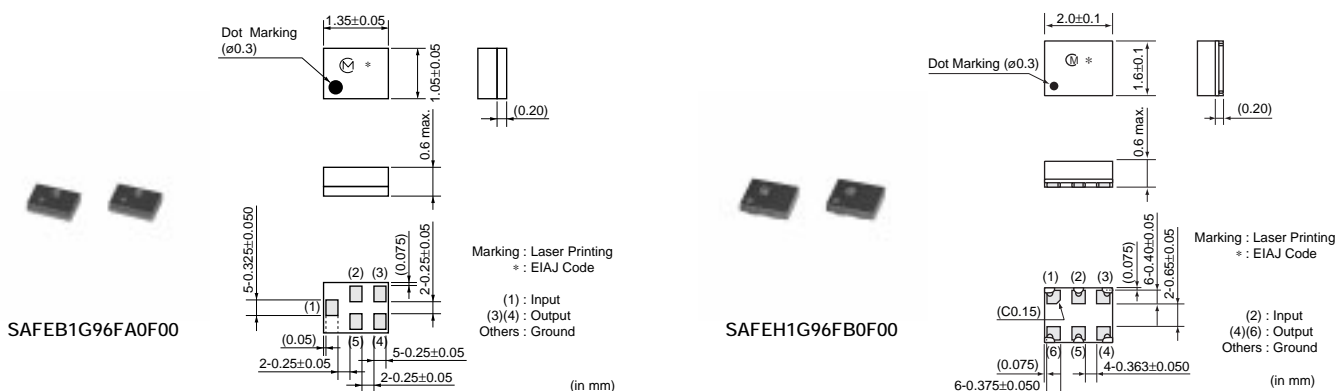

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|------------------------|------------------------|----------------------------|--------------------------|------------------------------|-----------------|------------------|
| SAFEB1G96FA0F00 | 1960 | 2.6 max. (1930-1990MHz) | 1.8 (1930MHz-1990MHz) | 2.2max. (1930MHz-1990MHz) | 50ohm | 150ohm//27nH |
| SAFED1G96FA0F00 | 1960 | 2.6 max. (1930-1990MHz) | 1.4 (1930MHz-1990MHz) | 2.2max. (1930MHz-1990MHz) | 50ohm | 150ohm//18nH |
| SAFEH1G96FB0F00 | 1960 | 2.6 max. (1930-1990MHz) | 1.8 (1930MHz-1990MHz) | 2.2max. (1930MHz-1990MHz) | 50ohm | 150ohm//22nH |
| SAFEE1G96AA0F00 | 1960 | 2.8 max. (1930-1990MHz) | 1.7 (1930MHz-1990MHz) | 2.4max. (1930MHz-1990MHz) | 50ohm | 50ohm |
| SAFSE1G96KD0T00 | 1960 | 3.0 max. (1930-1990MHz) | 2.0 (1930MHz-1990MHz) | 2.5max. (1930MHz-1990MHz) | 50ohm | 50ohm |
| SAFSD1G96FB0T00 | 1960 | 3.0 max. (1930-1990MHz) | 2.4 (1930MHz-1990MHz) | 2.4max. (1930MHz-1990MHz) | 50ohm | 200ohm//22nH |


△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● J-CDMA

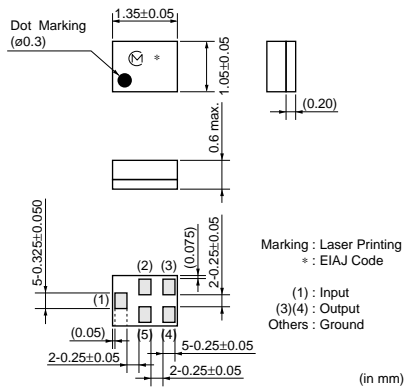

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|------------------------|------------------------|-----------------------------|------------------------|----------------------------|-----------------|------------------|
| SAFEC851MCL0F00 | 851 | 2.8 max. (832MHz-870MHz) | 1.7 (832MHz-870MHz) | 2.5max. (832MHz-870MHz) | 50ohm | 100ohm//56nH |
| SAFEF906MAM0F00 | 906 | 3.2 max. (887MHz-925MHz) | 1.5 (887MHz-925MHz) | 2.4max. (887MHz-925MHz) | 50ohm | 50ohm |
| SAFSE906MAM0T00 | 906 | 4.0 max. (887MHz-925MHz) | 2.5 (887MHz-925MHz) | 2.4max. (887MHz-925MHz) | 50ohm | 50ohm |
| SAFSE851MKB0T00 | 851 | 3.4 max. (832MHz-870MHz) | 2.5 (832MHz-870MHz) | 2.2max. (832MHz-870MHz) | 50ohm | 50ohm |
| SAFSD906MCL0T00 | 906 | 4.2 max. (887MHz-925MHz) | 2.5 (887MHz-925MHz) | 2.8max. (887MHz-925MHz) | 50ohm | 50ohm |
| SAFSD851MXA0T00 | 851 | 2.6 max. (832MHz-870MHz) | 1.9 (832MHz-870MHz) | 2.7max. (832MHz-870MHz) | 50ohm | 100ohm//56nH |

● PCS(CDMA)

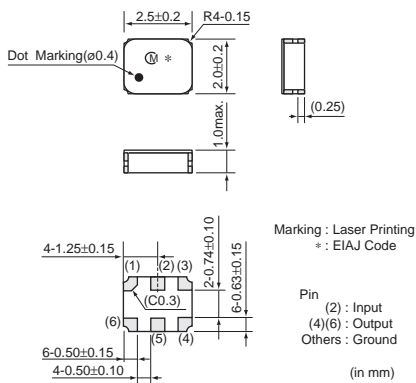


| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|------------------------|------------------------|-------------------------------|--------------------------|------------------------------|-----------------|------------------|
| SAFSE1G88KC0T00 | 1880 | 5.0 max. (1850MHz-1910MHz) | 3.5 (1850MHz-1910MHz) | 2.2max. (1850MHz-1910MHz) | 50ohm | 50ohm |
| SAFSD1G96FL0T00 | 1960 | 4.0 max. (1930MHz-1990MHz) | 2.0 (1930MHz-1990MHz) | 2.1max. (1930MHz-1990MHz) | 50ohm | 100ohm |

Filters for Communication Equipment

7

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.

● W-CDMA

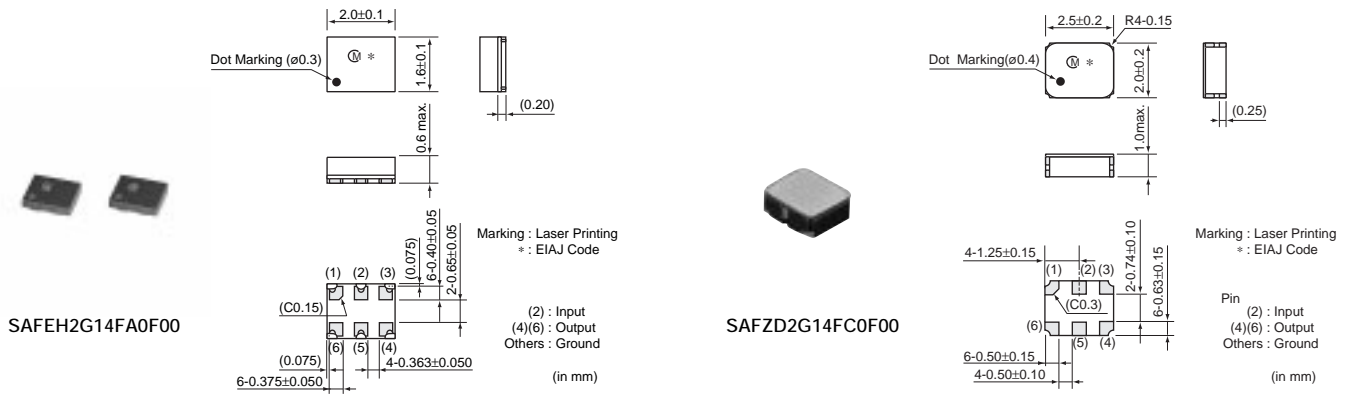

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|------------------------|------------------------|-------------------------------|--------------------------|------------------------------|-----------------|------------------|
| SAFEH2G14FA0F00 | 2140 | 2.3 max. (2110-2170MHz) | 1.2 (2110MHz-2170MHz) | 1.8max. (2110MHz-2170MHz) | 50ohm | 200ohm//27nH |
| SAFEH1G95FL0F00 | 1950 | 2.8 max. (1920-1980MHz) | 1.5 (1920MHz-1980MHz) | 2.0max. (1920MHz-1980MHz) | 200ohm//33nH | 50ohm |
| SAFEF1G95KA0F00 | 1950 | 3.0 max. (1920-1980MHz) | 1.7 (1920MHz-1980MHz) | 2.0max. (1920MHz-1980MHz) | 50ohm | 50ohm |
| SAFZE1G95KD0F00 | 1950 | 3.2 max. (1920-1980MHz) | 1.5 (1920MHz-1980MHz) | 2.6max. (1920MHz-1980MHz) | 50ohm | 50ohm |
| SAFZD2G14FC0F00 | 2140 | 2.7 max. (2110-2170MHz) | 1.3 (2110MHz-2170MHz) | 2.3max. (2110MHz-2170MHz) | 50ohm | 100ohm |
| SAFSE1G95KD0F00 | 1950 | 3.2 max. (1920-1980MHz) | 1.5 (1920MHz-1980MHz) | 2.6max. (1920MHz-1980MHz) | 50ohm | 50ohm |
| SAFSE2G14KB0T00 | 2140 | 2.7 max. (2110-2170MHz) | 1.3 (2110MHz-2170MHz) | 2.0max. (2110MHz-2170MHz) | 50ohm | 50ohm |
| SAFSE1G95KC0T00 | 1950 | 3.0 max. (1920-1980MHz) | 1.5 (1920MHz-1980MHz) | 2.0max. (1920MHz-1980MHz) | 50ohm | 50ohm |
| SAFSD2G14FA0T00 | 2140 | 2.7 max. (2110MHz-2170MHz) | 1.5 (2110MHz-2170MHz) | 2.2max (2110MHz-2170MHz) | 50ohm | 200ohm//22nH |
| SAFSD1G95FA0T00 | 1950 | 3.2 max. (1920-1980MHz) | 1.6 (1920MHz-1980MHz) | 2.1max. (1920MHz-1980MHz) | 200ohm//22nH | 50ohm |

● CDMA800/TDMA800/E-AMPS/GSM850

| Part Number | Center Frequency (MHz) | Insertion Loss (dB) | Ripple (dB max.) | VSWR | Input Impedance | Output Impedance |
|------------------------|------------------------|-----------------------------|------------------------|----------------------------|-----------------|------------------|
| SAFEF836MAL0F00 | 836.5 | 2.8 max. (824MHz-849MHz) | 1.4 (824MHz-849MHz) | 1.9max. (824MHz-849MHz) | 50ohm | 50ohm |

△Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering. Especially, please read rating and △CAUTION (for storage, operating, rating, soldering, mounting and handling) in them to prevent smoking and/or burning, etc.
• You are able to read a detailed specifications in the website (<http://search.murata.co.jp/>) before to require our product specifications or to transact the approval sheet for product specifications.