

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

INTRODUCTION:

Adam Tech MS Series Mini Shunts are available in .050", 2.0mm, .100" and .200" centerlines. They quickly and easily jump individual pins on pin headers to perform manual programming on PCB's. This series offers a broad range of sizes, shapes and colors. Shunts are designed with detents at top for easy fingertip installation and removal. Options include integrated pull tabs and gang types which are molded in one piece. This series is extremely low cost and is a highly economical, cost effective solution to replacing PCB switches. Adam Tech's shunts are available in Gold or Tin plating.

FEATURES:

Electrically connects two or more pin header posts
Wide variety of bodies and styles to choose from
Superior insulator design provides easy Fingertip extraction
Pull Tab and Ganged options available
Choice of Gold or Tin-plated contact area
Side and end stackable

MATING OPTIONS:

Mates with .025" sq. pin headers on .100" centers and all industry standard pin headers with .025" square post on .100" [2.54mm] centerlines.

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL94V-0
Insulator Color: Black
Contacts: Phosphor Bronze

Contact Plating:

G = Gold over nickel underplate overall
T = Tin over copper underplate overall

Electrical:

Operating voltage: 250V AC max.
Current rating: 3 Amps max
Contact resistance: 20 mΩ max. initial
Insulation resistance: 5000 MΩ min.
Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 1.57 lbs max.
Withdrawal force: .65 lbs min
Mating durability: 50 Cycles Gold
20 Cycles Tin

Temperature Rating:


Operating temperature: -40°C to +105°C

PACKAGING:

Anti-ESD plastic bags

SAFETY AGENCY APPROVALS:

UL Recognized & CSA Certified, File no. E224053

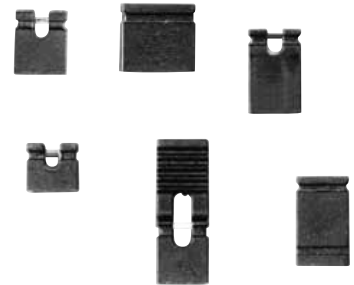

ORDERING INFORMATION

MSB

G

BODY STYLE/HEIGHT

MSA = Closed top, .256"
MSB = Open top, .236"
MSC = Open top, .177"
MSDA = Closed top, .315"
MSDB = Open top, .315"
MSBH = Handle-top, .531"
HMSA = .050" Mini Shunt (1 x 2)
HMSB = .050" Mini Shunt (2 x 2)
HMSC = .050" Mini Shunt, .118"
MSE = Closed top, 3 position
MST = 10 piece strip
MSBG = Ganged, block type
(Specify # of positions, 2 thru 10)

PLATING

G = Gold plated
T = Tin plated

2.00mm SHUNTS - Pg. 301

OPTIONS:

Add designator(s) to end of part number
30 = 30 μin gold plating in contact area

STANDARD INSULATOR COLOR IS BLACK

Other insulator colors available

Add designator(s) to end of part number

R = Red *

B = Blue *

W = White *

Y = Yellow *

G = Green *

* Minimum order required

