

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

## CMDA20 Series 0603 Package Size Bicolor Surface Mount LED

### Description and Features

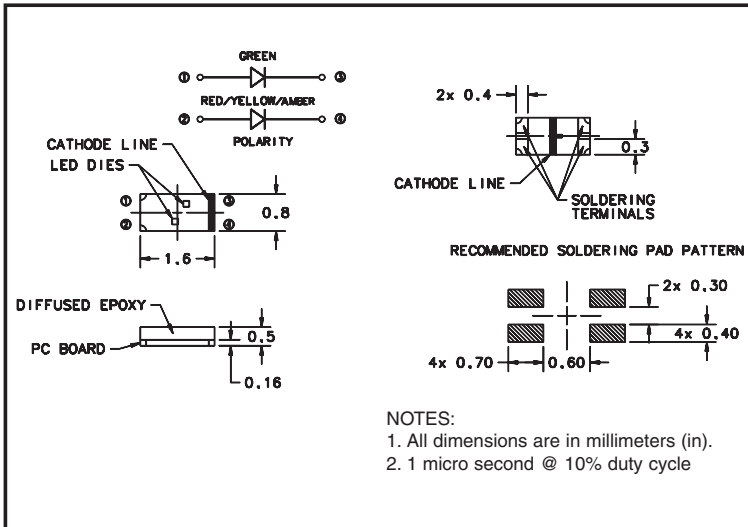

#### Features

- Small 1.6 x 0.8 mm Footprint
- Diffused optics
- Ideal for use with Light Pipes
- Compatible with IR solder profiles
- Available in 8 mm tape on 7" diameter reels
- Packaged 4,000 pieces per reel
- RoHS Compliant

#### Applications

- Keypad backlighting
- Symbol backlighting
- LCD backlighting
- Status indication
- Front panel indicator

## Electro-Optical Characteristics and Ratings

Part Number	Output Color	Diffusion	Package Color	Test Current (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. Typ. (V)	Luminous Intensity Min. (mcd)	Luminous Intensity Typ. (mcd)	Peak Wavelength (nm)	Viewing Angle (Degrees)
CMDA20AYAA7D1S	Green/Amber	Diffused	White	20	2.2/2.2	2.6/2.6	4/2.5	15/8	570/605	120
CMDA20AYCY7D1S	Green/Yellow	Diffused	White	20	2.2/2.1	2.6/2.6	4/2.5	15/8	570/589	120
CMDA20AYBR7D1S	Green/HE Red	Diffused	White	20	2.2/2.1	2.6/2.6	4/2.5	15/8	570/630	120

## Absolute Maximum Ratings to = 25°C

Part Number	Power Dissipation (mW)	Operating Temperature (°C)	Storage Temperature (°C)	Peak Forward Current Max. (See note 2) (mA)	Reverse Voltage (IR = 100 mA) (V)	Lead Solder Time at 230°C (Seconds)
AYAA	52	-30 to +85	-40 to +85	100	5	10
AYCY	52	-30 to +85	-40 to +85	100	5	10
AYBR	52	-30 to +85	-40 to +85	100	5	10

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[CMDA20AYAA7D1S](#) [CMDA20AYCY7D1S](#)