

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

AZ6951

SENSITIVE SUBMINIATURE RELAY

FEATURES

- Extremely small footprint utilizing only 0.18 square inch of PCB area
- Thin vertical profile only 0.25" wide
- 1 Form A contact with up to 5 Amp switching capability
- High sensitivity, 100mW pickup
- Dielectric strength 3000Vrms contact to coil
- Coils to 24VDC
- Epoxy sealed for automatic wave soldering and cleaning
- UL/CUR File E43203



CONTACTS

Arrangement	SPST- N.O. (1 Form A)
Ratings	Resistive load: Max. switched power: 150W or 1250VA Max. switched current: 5A
UL Ratings	Max. switched voltage: 30VDC or 250VAC 5A at 30VDC resistive 5A at 250VAC resistive
Material	Options: Silver tin oxide Silver tin oxide with gold plating
Resistance	< 100 milliohms initially (6V, 1A, voltage drop method)

COIL

Power At Pickup Voltage (typical)	100mW
Max. Continuous Dissipation Temperature Rise	550mW at 20°C (68°F) ambient 420mW at 40°C (104°F) ambient 25°C (45°F) at nominal coil voltage
Temperature	Max. 105°C (221°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 20 million operations 1 X 10 ⁵ at 5A, 30VDC or 250VAC Res.
Operate Time (typical)	6ms at nominal coil voltage
Release Time (typical)	3ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	750Vrms between open contacts 3000Vrms contact to coil
Insulation Resistance	1000 megohms min. at 20°C, 500 VDC, 50% RH
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -25°C (-30°F) to 70°C (158°F) -40°C (-40°F) to 105°C (221°F)
Vibration	0.062" DA at 10–55 Hz
Shock	10 g
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	3 grams

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM


AZ6951

RELAY ORDERING DATA


COIL SPECIFICATIONS				ORDER NUMBER*
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	1 Form A (SPST- N.O.)
5	6.5	125	3.5	AZ6951-5
6	7.8	180	4.2	AZ6951-6
9	11.7	405	6.3	AZ6951-9
12	15.6	720	8.4	AZ6951-12
18	23.4	1,620	12.6	AZ6951-18
24	31.2	2,880	16.8	AZ6951-24

* Add suffix "G" for gold plated contacts


MECHANICAL DATA

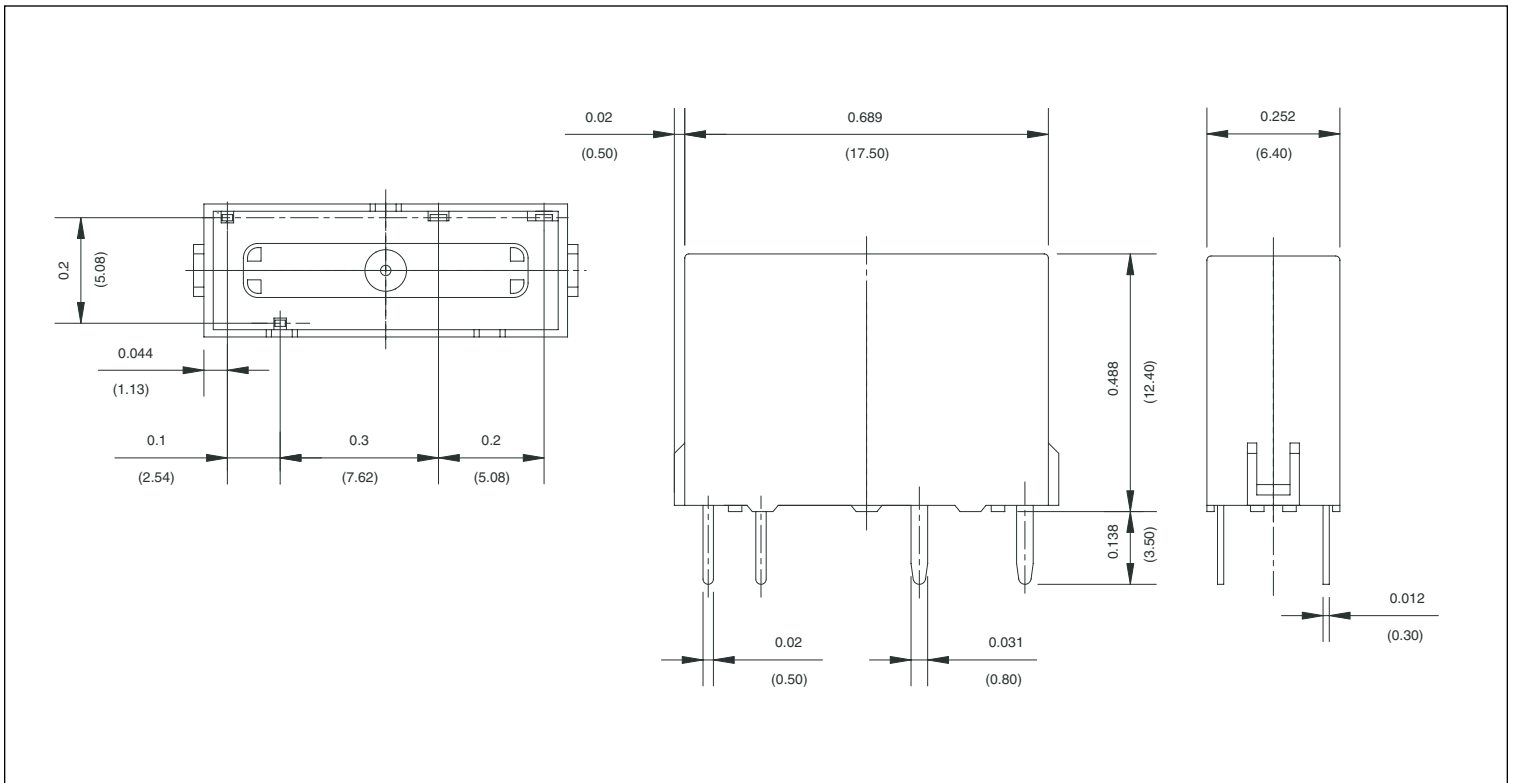

PC BOARD LAYOUT

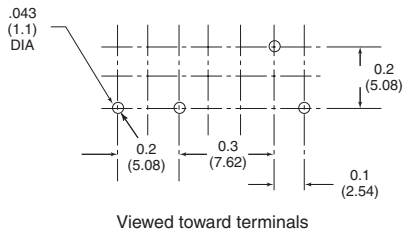

WIRING DIAGRAM



Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "

AMERICAN ZETTLER, INC. www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM