

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# AZ943

## 15 AMP MINIATURE PC BOARD RELAY



### FEATURES

- High performance
- Low seated height
- Flux tight and sealed versions available
- Class B insulation (130°C) standard
- Class F insulation (155°C) available
- UL, CUR file E43203
- TÜV file R50161256

### CONTACTS

<b>Arrangement</b>	SPST (1 Form A) SPDT (1 Form C)
<b>Ratings</b>	Form A and C Max. switched power: 210W or 2770VA Max. switched current: 15A (1 Form A), 10A (1 Form C) Max. switched voltage: 30VDC or 277VAC
<b>UL/CUR</b>	1 Form A 15A at 125VAC, General use, 6k cycles, 70°C 12A at 120VAC, Res. 6k cycles, TV-5 120VAC 70°C 10A at 277VAC, General use, 100k cycles, 70°C 9.8 FLA 1/2HP at 125VAC, 70°C (N.O.) 125VA at 120VAC Pilot Duty, 100k cycles (N.O.), 70°C 10A at 30VDC, Res. (N.O.)70°C 8A at 125VAC, 1000W Incandescent Lamp, Tungsten, 70°C
<b>TÜV</b>	1 Form C 10A at 120VAC, Res, 100k cycles, (N.O.) 70°C 10A at 120VAC, Res, 6k cycles, (N.C.) 70°C 10A at 277VAC, General Use, 100k cycles, (N.O./N.C.) 70°C 9.8 FLA, 58.8 LRA 1/2HP at 125VAC, 6K cycles 70°C (N.O.) 10A at 30VDC, Res. (N.O.)70°C 7A at 30VDC, Res. (N.C.)70°C
<b>Material</b>	Silver tin oxide (gold plating available not TÜV approved)
<b>Resistance</b>	< 100 milliohms initially (6V, 1A method)

### COIL

<b>Power</b>	
<b>At Pickup Voltage</b>	203mW
<b>Max Continuous Dissipation</b>	1.8W at 20°C (68°F) Class B 2.4W at 20°C (68°F) Class F
<b>Temperature Rise</b>	32°C (58°F) at nominal coil voltage
<b>Temperature</b>	Max. 130°C (266°F) Class B Max. 155°C (311°F) Class F

### GENERAL DATA

<b>Life Expectancy</b>	
<b>Mechanical</b>	1 x 10 <sup>7</sup>
<b>Electrical</b>	1 x 10 <sup>5</sup> at 10A 277VAC Res.
<b>Operate Time</b>	10ms max.
<b>Release Time</b>	5ms max. (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	150Vrms contact to coil 750Vrms across contacts
<b>Insulation Resistance</b>	100 megohms min. at 500VDC, 50% RH
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature</b>	At nominal coil voltage
<b>Operating</b>	-40°C(-40°F) to 90°C(194°F) Class B -40°C(-40°F) to 110°C(230°F) Class F
<b>Storage</b>	-40°C(-40°F) to 130°C(266°F)
<b>Vibration</b>	0.062" DA at 10–55Hz
<b>Shock</b>	10g
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	10 grams

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Unsealed relays should not be dip cleaned.
4. Specifications subject to change without notice.

**AMERICAN ZETTLER, INC.** [www.azettler.com](http://www.azettler.com)

75 COLUMBIA ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 FAX: (949) 831-8642 E-MAIL: SALES@AZETTLER.COM


# AZ943

## RELAY ORDERING DATA

STANDARD RELAYS				ORDER NUMBER*
COIL SPECIFICATIONS				
Nominal Coil VDC	Must Operate VDC	Max Continuous VDC	Coil Resistance ±10%	
4	3.0	5.2	44	AZ943-1CH-4D
5	3.8	6.5	70	AZ943-1CH-5D
6	4.5	7.8	100	AZ943-1CH-6D
9	6.8	11.7	225	AZ943-1CH-9D
12	9.0	15.6	400	AZ943-1CH-12D
18	13.5	23.4	900	AZ943-1CH-18D
24	18.0	31.2	1,600 ±15%	AZ943-1CH-24D
48	36.0	62.4	6,400 ±15%	AZ943-1CH-48D

\* Substitute "1AH" in place of "1CH" to indicate 1 Form A contact. Add suffix "E" for epoxy sealed versions. Add suffix "G" for gold plated contacts. To indicate Class F version, add suffix "F".

## MECHANICAL DATA

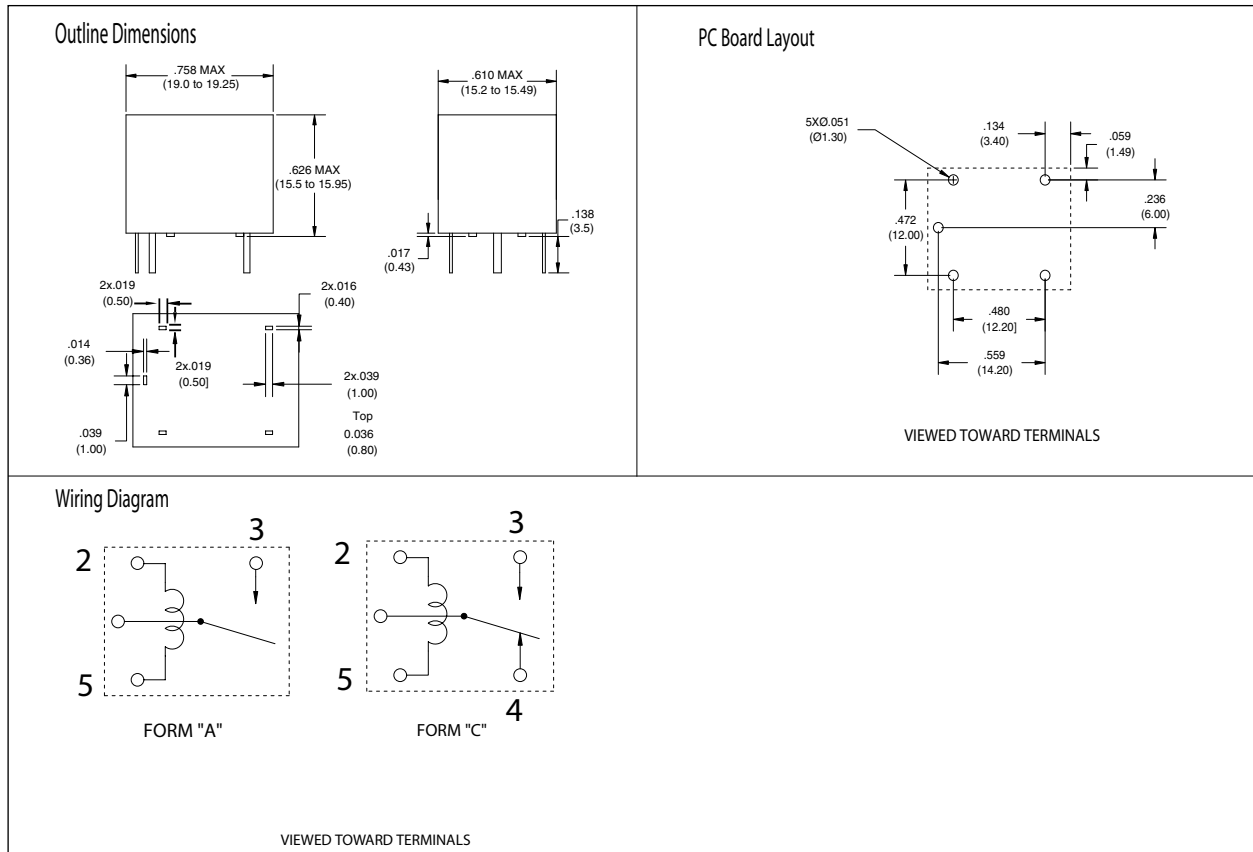

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± .010"

**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 FAX: (949) 831-8642 E-MAIL: SALES@AZETTLER.COM