

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

AZ822

SUBMINIATURE DIP RELAY

FEATURES

- Low profile for compact board spacing
- DC coils to 48VDC
- Life expectancy to 10 million operations
- Standard PC 0.1" grid terminal spacing
- Fits standard 16 pin IC socket
- Epoxy sealed for automatic wave soldering and cleaning
- Meets FCC Part 68.302 1500V lightning surge
- Meets FCC Part 68.304 1000V dielectric
- UL, CUR file E43203



CONTACTS

Arrangement	DPDT (2 Form C) Bifurcated crossbar contacts
Ratings	Resistive load: Max. switched power: 60W or 125VA Max. switched current: 2A Max. switched voltage: 220VDC or 250VAC UL Rating: 1A at 24VDC 0.5A at 120VAC
Material	Silver palladium, gold clad
Resistance	< 50 milliohms initially

COIL

Power At Pickup Voltage (typical)	98mW (Standard coils) 74mW (Sensitive coils)
Max. Continuous Dissipation	0.94W at 20°C (68°F)
Temperature Rise	15°C (27°F) at nominal coil voltage
Temperature	Max. 105°C (221°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Relay adjustment may be affected if undue pressure is exerted on relay case.
4. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁸ 5 x 10 ⁵ at 1A, 24VDC
Operate Time (typical)	5ms at nominal coil voltage
Release Time (typical)	2ms at nominal coil voltage (with no coil suppression)
Capacitance (max.)	Contact to contact: 1.2pF Contact set to contact set: 1.6pF Contact to coil: 1.5pF
Bounce (typical)	At 10mA contact current 2ms at operate N.O. side 3ms at operate N.C. side
Dielectric Strength (at sea level for 1 min.)	1000Vrms contact to coil 1000Vrms contact to contact 1000Vrms between contact sets
Insulation Resistance	1000 megohms min. at 20°C, 500 VDC, 50% RH
Dropout	Greater than 5% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -55°C (-67°F) to 90°C (194°F) -55°C (-67°F) to 105°C (221°F)
Vibration	0.062" DA at 10–55 Hz
Shock	10 g
Enclosure	P.B.T. polyester (UL94 V-0)
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	Approx. 4.5 grams


AZ822

RELAY ORDERING DATA

COIL SPECIFICATIONS - STANDARD				ORDER NUMBER
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	
3	6.5	45	2.1	AZ822-2C-3DE
5	10.8	125	3.5	AZ822-2C-5DE
6	13.0	180	4.2	AZ822-2C-6DE
9	19.5	405	6.3	AZ822-2C-9DE
12	26.5	720	8.4	AZ822-2C-12DE
24	52.9	2880	16.8	AZ822-2C-24DE
48	103.9	11,520	33.6	AZ822-2C-48DE

COIL SPECIFICATIONS - SENSITIVE				ORDER NUMBER
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	
3	7.5	60	2.1	AZ822-2C-3DSE
5	12.5	167	3.5	AZ822-2C-5DSE
6	15.0	240	4.2	AZ822-2C-6DSE
9	22.5	540	6.3	AZ822-2C-9DSE
12	30.0	960	8.4	AZ822-2C-12DSE
18	40.0	1620	12.6	AZ822-2C-18DSE
24	52.9	2880	16.8	AZ822-2C-24DSE
48	84.9	7680	33.6	AZ822-2C-48DSE

MECHANICAL DATA

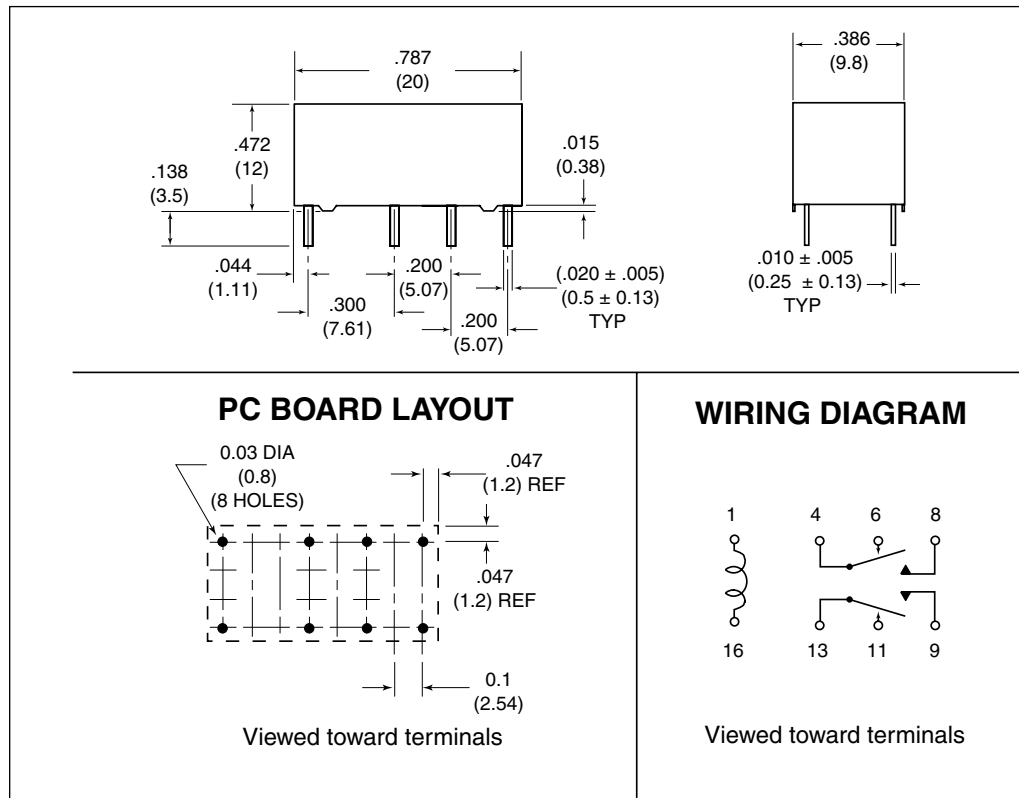

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010''$

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM