

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

THRU-HOLE POWER INDUCTORS



AIUR-05, AIUR-06 SERIES

FEATURES:

- Ferrite core with heat shrink tube
- High Reliability

OPTIONS:

- Bulk Pack is standard


APPLICATIONS:

- Electronic Appliance
- Noise Filtering

STANDARD SPECIFICATIONS:

Part Number AIUR-05	L (μH)	Q Min	Test Freq (MHz)	R _{DC} (Ω) Max	I _{DC} (A) Max	SRF (MHz) Min
3R3M	3.3	10	7.96	0.013	4.50	38
4R7M	4.7	10	7.96	0.017	3.70	30
6R8M	6.8	10	7.96	0.022	3.10	24
100K	10	20	2.52	0.031	2.50	19
150K	15	20	2.52	0.042	2.00	15
220K	22	20	2.52	0.070	1.60	12
330K	33	20	2.52	0.092	1.30	10
470K	47	20	2.52	0.130	1.10	8.2
680K	68	20	2.52	0.160	0.91	6.6
101K	100	15	0.796	0.230	0.75	5.4
151K	150	15	0.796	0.400	0.61	4.3
221K	220	15	0.796	0.530	0.50	3.5
331K	330	15	0.796	0.780	0.41	2.8
471K	470	10	0.796	1.000	0.34	2.3
681K	680	10	0.796	1.500	0.28	1.9
102K	1000	20	0.252	2.200	0.23	1.5
152K	1500	30	0.252	3.500	0.18	1.2

PHYSICAL CHARACTERISTICS:

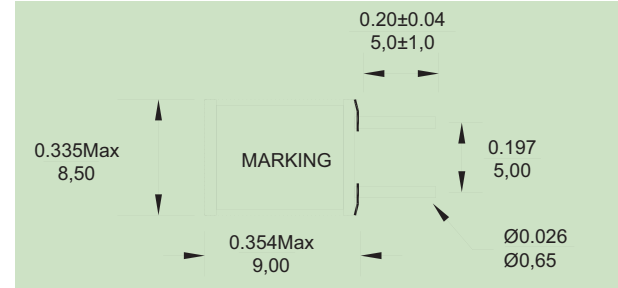

TECHNICAL INFORMATION:

- Lp tolerance: K = ±10%, M = ±20%
- Letter suffix indicates standard tolerance
- IDC Max: typical 10% inductance drop from initial value
- Operating Temperature: -40°C to +125°C with no load -40°C to +85°C with full rated current
- Marking: Inductance and tolerance
- Warping: UL Heat Shrink tube


STANDARD SPECIFICATIONS:

Part Number AIUR-06	L (μH)	R _{DC} (Ω) Max	I _{DC} (A) Max
3R9K	3.9	0.016	14.2
4R7K	4.7	0.018	13.0
5R6K	5.6	0.021	11.0
6R8K	6.8	0.023	10.0
8R2K	8.2	0.026	9.5
100K	10	0.031	8.8
120K	12	0.036	7.9
150K	15	0.040	7.1
180K	18	0.041	7.4
220K	22	0.043	6.1
270K	27	0.046	5.5
330K	33	0.051	5.2
390K	39	0.054	4.5
470K	47	0.063	4.1
560K	56	0.075	3.8

Part Number AIUR-06	L (μH)	R _{DC} (Ω) Max	I _{DC} (A) Max
680K	68	0.078	3.5
820K	82	0.088	3.1
101K	100	0.108	2.8
121K	120	0.127	2.6
151K	150	0.162	2.4
181K	180	0.228	2.1
221K	220	0.252	1.9
271K	270	0.270	1.75
331K	330	0.394	1.62
391K	390	0.416	1.40
471K	470	0.568	1.30
561K	560	0.65	1.20
681K	680	0.74	1.10
821K	820	1.00	0.96
102K	1000	1.20	0.88

Part Number AIUR-06	L (μH)	R _{DC} (Ω) Max	I _{DC} (A) Max
122K	1200	1.5	0.80
152K	1500	1.7	0.72
182K	1800	1.8	0.66
222K	2200	2.4	0.60
272K	2700	2.8	0.54
332K	3300	3.7	0.48
392K	3900	5.0	0.42
472K	4700	5.6	0.40
562K	5600	6.3	0.37
682K	6800	8.4	0.34
822K	8200	9.6	0.31
103K	10000	10.5	0.29
123K	12000	14.5	0.25
153K	15000	20.5	0.23

PHYSICAL CHARACTERISTICS:

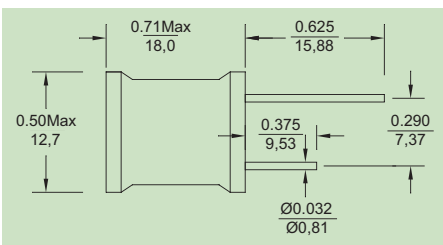

TECHNICAL INFORMATION:

- Test frequency: 10KHz 0.1VRMS
- Tolerance: K=10% (Standard)
- Letter suffix indicates standard tolerance
- Temperature: -40°C to +125°C with no load -40°C to +85°C with full rated current
- Marking: Value and tolerance
- L drops 10% typical @ IDC from initial value
- UL Shrink Tube
- Check SCD for detail E&M specification

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[AIUR-05-100K](#) [AIUR-05-101K](#) [AIUR-05-102K](#) [AIUR-05-150K](#) [AIUR-05-151K](#) [AIUR-05-152K](#) [AIUR-05-220K](#) [AIUR-05-221K](#) [AIUR-05-330K](#) [AIUR-05-331K](#) [AIUR-05-3R3M](#) [AIUR-05-470K](#) [AIUR-05-471K](#) [AIUR-05-4R7M](#) [AIUR-05-680K](#) [AIUR-05-681K](#) [AIUR-05-6R8M](#)