

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Type : **Balun**


Part No : **EHF** \_ \_ \_ \_ \_

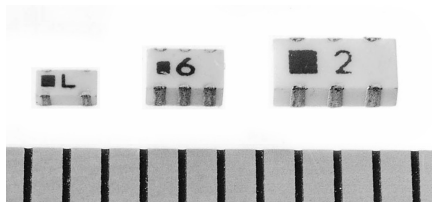

## ■ Features

- Ultra miniaturized, thin type (1.6×0.8×t 0.65)
- Available for each frequency range (300 MHz to 4000 MHz)
- Balanced / Unbalanced Converter
- Impedance matching (50 Ω/50 Ω, 50 Ω/100 Ω, 50 Ω/200 Ω)

## ■ An Equivalent Circuit

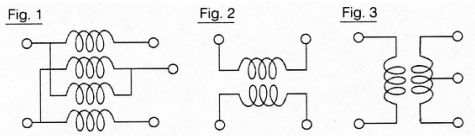

## ■ Recommended Applications

- Digital portable telephone
- Dual mode portable telephone
- Personal handy-phone system
- Mobile communication system

## ■ Typical Characteristics

Part No. Items	FD 1622	FD 1620	FD 1629	FD 1617	FD 1618	FD 1619	1BD 0380	1BD 0800	1BG 0836	1BG 1800	2BD 1800	2BD 1900	2BD 2060
Frequency (MHz)	824 to 894	880 to 960	1700 to 2000	380 to 430	880 to 960	1700 to 2000	380 to 430	824 to 894	824 to 894	1700 to 1910	1700 to 1910	1800 to 2000	1920 to 2170
Insertion Loss (dB)	1.0 max.	2.0 max.	1.0 max.	1.0 max.	1.0 max.	0.8 max.	2.0 max.	2.0 max.	0.8 max.	0.8 max.	1.0 max.	1.0 max.	1.0 max.
Difference of Phase (deg)	180±15	180±15	180±10	180±10	180±15	180±15	180±15	180±15	180±10	180±10	180±15	180±15	180±15
Impedance (Ω)	50 / 200	50 / 200	50 / 50	50 / 200	50 / 50	50 / 50	50 / 50	50 / 50	50 / 200	50 / 200	50 / 50	50 / 50	50 / 50
Circuit Diagram	Fig.1	Fig.1	Fig.2	Fig.1	Fig.2	Fig.2	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3
Dimension No.	※2	※2	※2	※4	※4	※4	※5	※5	※5	※5	※3	※3	※3

Part No. Items	2BD 2450	2BE 0920	2BE 1600	2BE 1800	2BE 1900	2BE 2060	2BE 2450	2BE 3635	2BG 1800	2BG 2060	2BG 2450	4BD 2450	4BE 5250
Frequency (MHz)	2400 to 2500	880 to 960	1520 to 1720	1700 to 1910	1800 to 2000	1920 to 2170	2400 to 2500	3400 to 4000	1700 to 1910	1920 to 2170	2400 to 2500	2400 to 2500	5150 to 5350
Isolation Loss (dB)	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.0 max.	1.2 max.
Difference of Phase (deg)	180±15	180±15	180±15	180±15	180±15	180±15	180±15	180±20	180±15	180±15	180±15	180±15	180±15
Impedance (Ω)	50 / 50	50 / 100	50 / 100	50 / 100	50 / 100	50 / 100	50 / 100	50 / 100	50 / 200	50 / 200	50 / 200	50 / 50	50 / 100
Circuit Diagram	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3	Fig.3
Dimension No.	※3	※3	※3	※3	※3	※3	※3	※3	※3	※3	※3	※1	※1

(The attention) : It omits EHF.

## ■ Dimensions in mm (not to scale)

