

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



Typical Applications


This switch is ideal for use as a DPDT Diversity Switch for 5.0 - 6.0 GHz applications:

- HiperLAN
- UNII

Features

- Low Insertion Loss: 1.2 dB @ 5.5 GHz
- High IP3: 49 dBm
- Positive Control: 0/+5V
- Ultra Small MSOP8G Package: 14.8 mm²

Functional Diagram

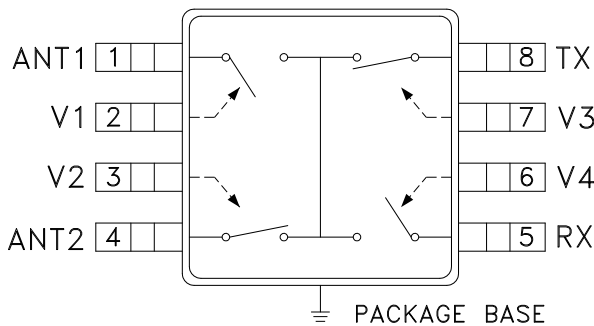


General Description

The HMC393MS8G & HMC393MS8GE are low cost C-band DPDT switches that operate between 5 and 6 GHz. This switch can operate as an integrated antenna diversity and transmit/receive switch for the HyperLAN and UNII radio platforms. The design provides 20 dB of isolation between antennas and between Tx and Rx ports. The switch features 1.2 dB insertion loss and high power handling capability. Switch state is controlled using four CMOS level control voltage lines.


Electrical Specifications, $T_A = +25^\circ C$, $V_{ctl} = 0/+5 V_{dc}$, 50 Ohm System

Parameter	Frequency	Min.	Typ.	Max.	Units
Insertion Loss	5.0 - 6.0 GHz		1.2	2.0	dB
Isolation	5.0 - 6.0 GHz	15	20		dB
Return Loss (On State, Any Port)	5.0 - 6.0 GHz	13	20		dB
Input Power for 0.1 dB Compression	5.0 - 6.0 GHz	27	30		dBm
Input Third Order Intercept (Two-Tone Input Power = +22 dBm Each Tone)	5.0 - 6.0 GHz	45	49		dBm
Switching Characteristics	5.0 - 6.0 GHz				
tRISE / tFALL (10/90% RF)			11		ns
tON / tOFF (50% CTL to 10/90% RF)			22		ns


Insertion Loss

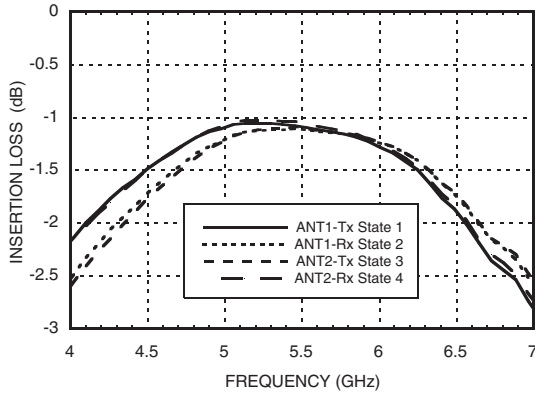


Insertion Loss vs. Temperature

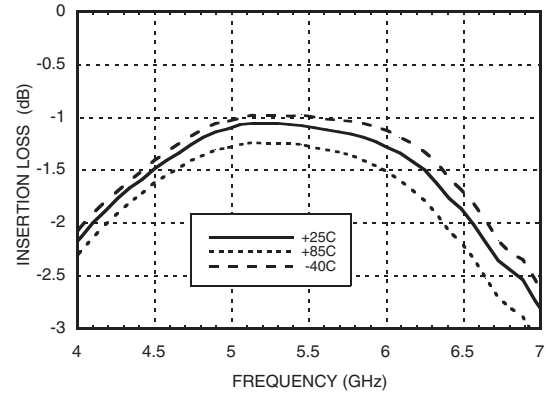


Isolation, Tx & Rx

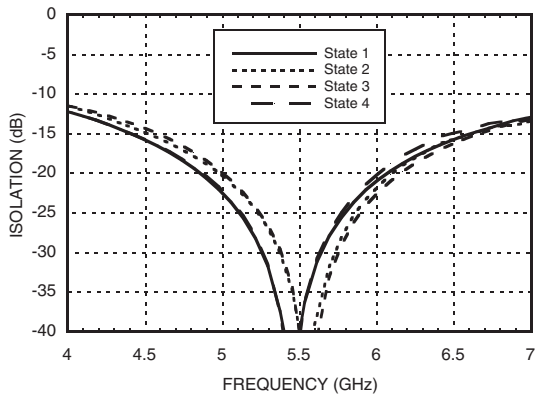


Isolation, ANT1 & ANT2

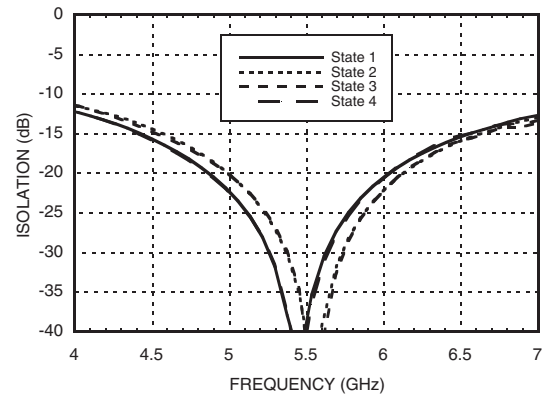

Return Loss, ANT1 & ANT2

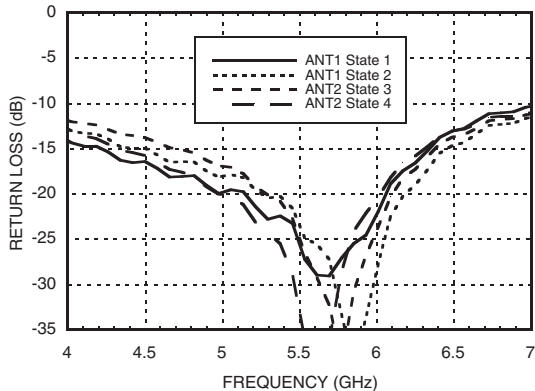


Return Loss, Tx & Rx

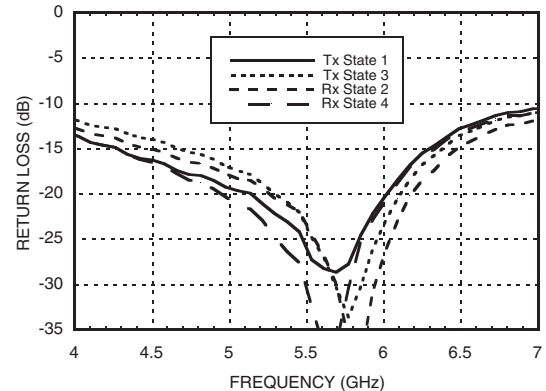





Isolation, ANT1 / ANT2 - Tx / Rx

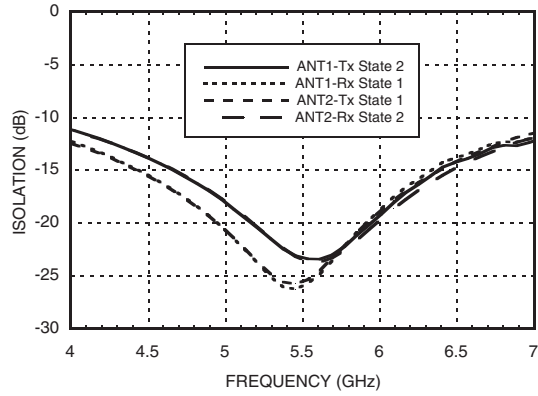

Input 0.1 dB Compression Point

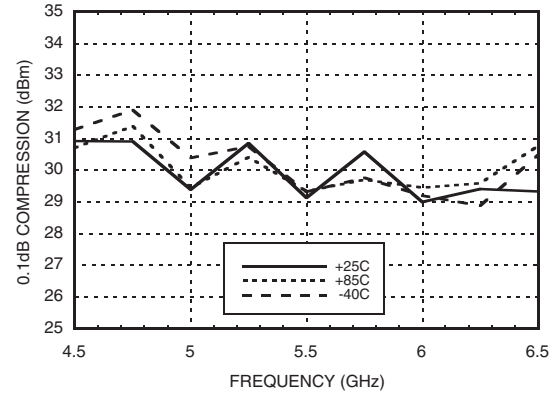

Input IP3 *

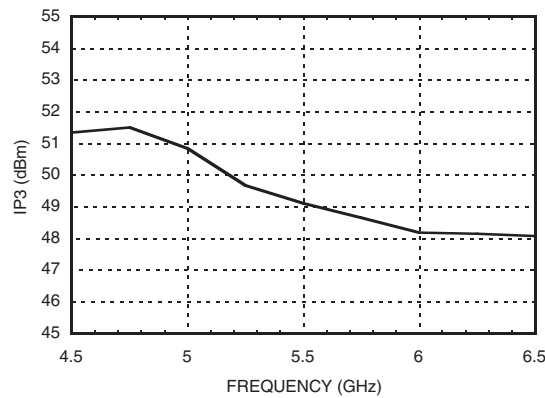

Control Voltages

State	Bias Condition
Low	0 to +0.5 Vdc @ 10 uA Typ.
High	+5.0 to +6.5 Vdc @ 10 uA Typ.

Truth Table

Path	V1	V2	V3	V4	State
ANT1 - Tx	High	Low	High	Low	1
ANT1 - Rx	High	Low	Low	High	2
ANT2 - Tx	Low	High	High	Low	3
ANT2 - Rx	Low	High	Low	High	4

* Two-tone input power = +22 dBm each tone, 1 MHz spacing.



HMC393MS8G / 393MS8GE

GaAs MMIC DPDT DIVERSITY SWITCH, 5 - 6 GHz

Absolute Maximum Ratings

RF Input Power $V_{ctl} = 0/+5V$	+33 dBm
Control Voltage Range (V1, V2, V3, V4)	-0.5 to +7.5 Vdc
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1A




**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

Caution: Do not "Hot Switch" power levels greater than +23 dBm ($V_{ctl} = 0/+5 Vdc$).

DC blocking capacitors are required at ports ANT1, ANT2, Tx, Rx. Choose value for lowest frequency of operation.

Outline Drawing

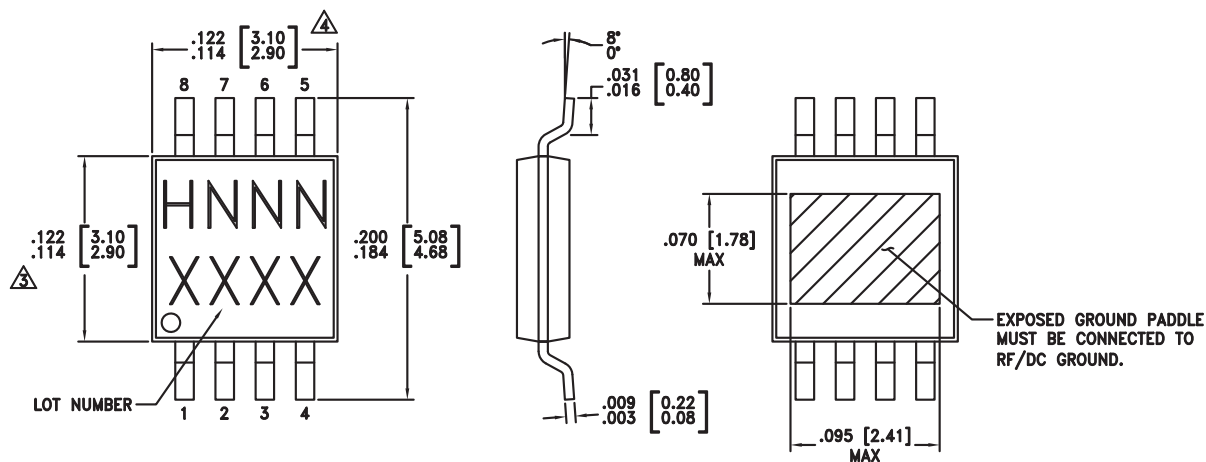

NOTES:

- LEADFRAME MATERIAL: COPPER ALLOY
- DIMENSIONS ARE IN INCHES [MILLIMETERS]
- \triangle DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
- \triangle DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
- ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[3]
HMC393MS8G	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 ^[1]	H393 XXXX
HMC393MS8GE	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	H393 XXXX

[1] Max peak reflow temperature of 235 °C


[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373
Order On-line at www.hittite.com



Evaluation PCB

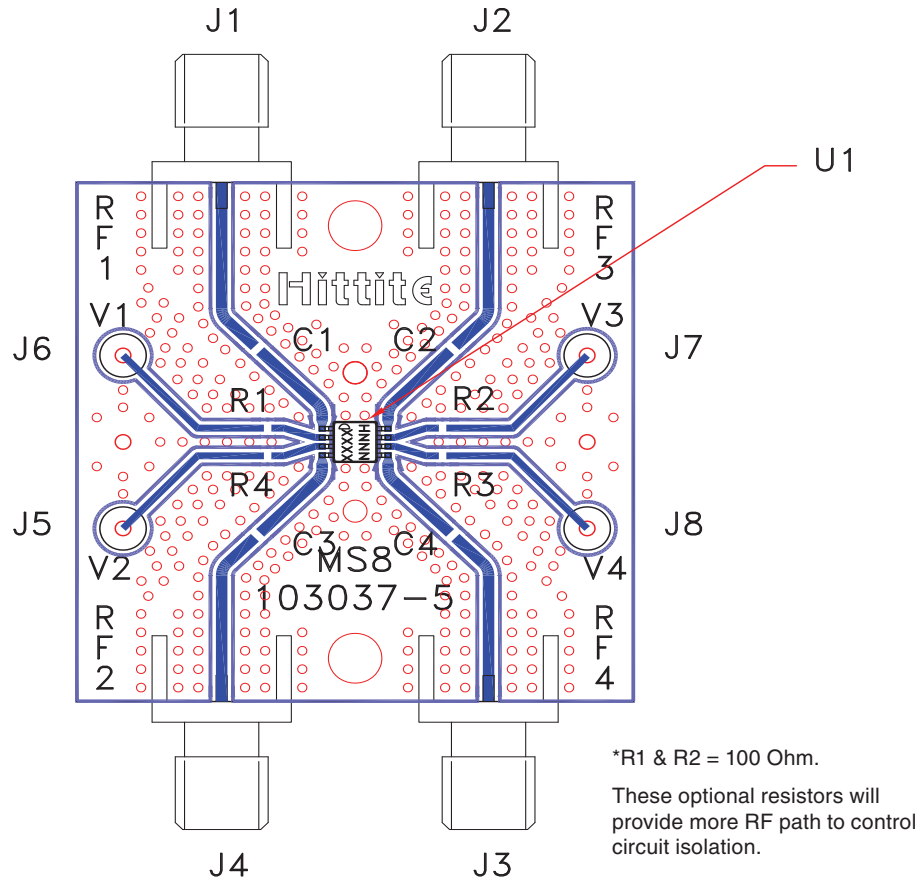

List of Materials for Evaluation PCB 103132 ^[1]

Item	Description
J1 - J4	PCB Mount SMA Connector
J5 - J8	DC Pin
C1 - C4	Chip Capacitor, 0402 Pkg. Choose value for lowest frequency of operation. 100 pF is provided on PCB.
R1 - R2	100 Ohm Resistor, 0402 Pkg.
U1	HMC393MS8G / HMC393MS8GE DPDT Diversity Switch
PCB ^[2]	103037 Evaluation PCB 1.5"x1.5"

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown above. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown above is available from Hittite upon request.



v04.0607



HMC393MS8G / 393MS8GE

**GaAs MMIC DPDT DIVERSITY
SWITCH, 5 - 6 GHz**

Notes:

10

SWITCHES - SMT