

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# TIGHTpak™ Toroidal Common Mode Line Choke

Actown's Toroid style of common mode chokes are designed with patented TIGHTpak technology. Within a single layer winding 70% more turns are achievable over a traditional winding using the same size core and wire gauge.

Parts are constructed to an industry standard footprint. Materials comply with 94V-0 flammability specifications. A 3mm spacer between each winding provides creepage and clearance to comply with UL, CSA, and IEC safety specifications.

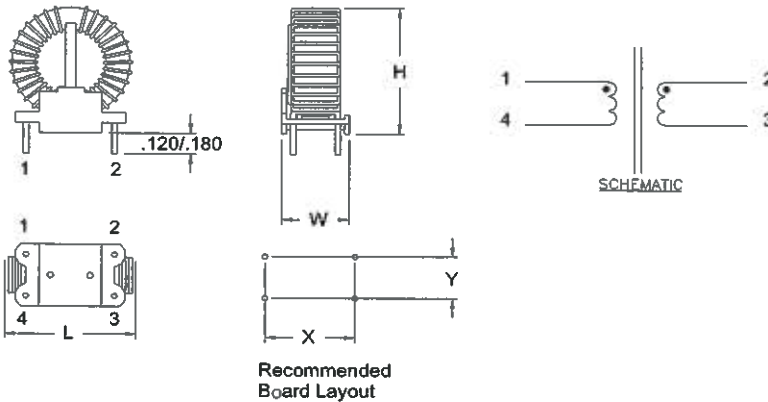

Part Number	Inductance min (mH)	Current Rating Amps	Leakage Inductance max (uH)	SRF typ (Khz)	DCR max (ohms)	L Max	W Max	H Max	X (inches)	Y (inches)	Lead Diameter Nom	PC Board Hole Diameter
TPCM-2.8-3	2.83	3	50	755	0.049	1.15	0.70	1.15	0.80	0.40	0.029	0.047
TPCM-3.9-3	3.93	3	71	550	0.063	1.20	0.70	1.30	0.80	0.40	0.029	0.047
TPCM-1.7-5	1.73	5	31	1070	0.025	1.15	0.70	1.15	0.80	0.40	0.036	0.055
TPCM-2.4-5	2.41	5	45	775	0.036	1.20	0.70	1.30	0.80	0.40	0.036	0.055
TPCM-6.6-5	6.61	5	94	450	0.059	1.50	1.00	1.50	1.20	0.70	0.036	0.055
TPCM-1.0-8	1.00	8	18	1500	0.013	1.15	0.70	1.15	0.80	0.40	0.045	0.067
TPCM-4.4-8	4.35	8	60	545	0.036	1.50	1.00	1.50	1.20	0.70	0.045	0.067
TPCM-7.0-8	6.96	8	109	350	0.044	1.70	1.00	1.80	1.20	0.70	0.045	0.067
TPCM-0.8-10	0.80	10	14	1480	0.010	1.15	0.70	1.15	0.80	0.40	0.051	0.070
TPCM-3.3-10	3.27	10	49	635	0.022	1.50	1.00	1.50	1.20	0.70	0.051	0.070
TPCM-5.6-10	5.57	10	83	400	0.031	1.70	1.00	1.80	1.20	0.70	0.051	0.070
TPCM-3.8-13	3.78	13	65	510	0.021	1.75	1.00	1.75	1.20	0.70	0.057	0.079

Current rating based on 250 circular mils/amp  
 Inductance measured @ 10Khz .10Vrms  
 Electrical specifications at 25C  
 Operating temperatures -40C to 85C  
 1500 Vrms dielectric between windings



## AMVECO STANDARD SERIES INDUCTORS



In addition to toroidal transformers, Amveco designs and manufactures toroidal chokes for DC-filtering and AC-circuits. As with transformers, toroidal chokes also offer significant savings in both size and weight compared to a laminated core. Presently, we manufacture chokes from 0.2 Ws to 25 Ws. AMVECO has developed its own design software which allows us to design and manufacture to your specific needs. With in-house capabilities for both core-making and core-cutting, we can offer fast turn-around for both prototypes and production units.



AMVECO Inductors

Part Number	Current I DC (A)	Current RMS	L (mH)	Power (WS)	Losses Core-Copper	OD x HT (Inches)	OD x HT (mm)	WT (lbs.)	WT (kg)
L2010	20	14.1	10	2	5 - 23.2	5.5 x 2.4	140 x 61	8	3.6
L2015	20	14.1	15	3	7 - 28.4	5.9 x 2.8	150 x 71	11.5	5.2
L2020	20	14.1	20	4	8 - 32.8	6.5 x 2.8	165 x 71	14	6.4
L2040	20	14.1	40	8	12 - 42.8	8.0 x 3.5	203 x 89	27	12.3
L3005	30	21.2	5	2.25	5 - 26.1	5.5 x 2.4	140 x 61	8.5	3.9
L3010	30	21.2	10	4.5	8 - 37.8	6.5 x 2.8	165 x 71	15	6.8
L3015	30	21.2	15	6.75	11 - 45.9	8.0 x 3.0	203 x 76	22	10.0
L3020	30	21.2	20	9	13 - 43.2	8.0 x 3.5	203 x 89	28	12.7
L4005	40	28.3	5	4	8 - 32	6.5 x 2.8	165 x 71	14	6.4
L4010	40	28.3	10	8	13 - 43.2	8.0 x 3.5	203 x 89	27	12.3
L4015	40	28.3	15	12	20 - 56	10 x 3.4	254 x 86	39	17.7
L5005	50	35.3	5	6.25	11 - 35	8.0 x 3.0	203 x 76	23	10.4
L5010	50	35.3	10	12.5	20 - 57.5	10.0 x 3.4	254 x 86	39	17.7
L6005	60	42.4	5	9	12 - 43.2	8.0 x 3.5	203 x 89	29	13.2

# POWER TRANSFORMERS FOR AUDIO APPLICATIONS

## Features

- Power Transformers for Audio Applications
- UL 6500 Audio Standard
- Low Audible Noise
- Low Magnetic Stray Field
- Non-Encapsulated Units
- Metal Disk Mounting



## OFF-THE-SHELF, STANDARD TRANSFORMERS

Primary 117v/60Hz

Nominal Power VA	Secondary Voltage V	Secondary Current A	Secondary No Load Voltage V	Diameter Inch/mm	Height Inch/mm	Weight Lbs/kg	Part Number
100	2x 9	5.55	10.5	3.4/87	1.5/38	1.7/1.78	60102
	2x12	4.17	14.1				60103
	2x15	3.33	17.6				60104
	2x18	2.78	21.1				60105
240	2x15	8.00	16.5	4.0/102	1.8/46	3.3/1.5	60242
	2x18	6.67	19.8				60243
	2x24	5.00	26.4				60244
	2x30	4.00	33.0				60245
400	2x15	13.33	16.3	4.5/115	2.2/57	5.3/2.4	60402
	2x18	11.11	19.5				60403
	2x24	8.33	26.0				60404
	2x30	6.67	32.5				60405
600	2x15	20.00	15.9	5.3/135	2.3/58	7.7/3.5	60601
	2x18	16.67	19.1				60602
	2x24	12.50	25.4				60603
	2x30	10.00	31.8				60604
1000	2x24	20.83	25.6	6.5/165	2.4/62	13.0/5.9	<del>61001</del>
	2x30	16.67	31.2				<del>61001</del>



11222 Richmond Avenue, Suite 120  
Houston, TX 77082  
800.527.7042 or 713.977.2500  
Fax: 713.977.5031  
[www.amveco.com](http://www.amveco.com)

ACME  ELECTRIC

~~61001~~  
~~61001~~  
~~61002~~  
61002