

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



# 2.5V, 3.3V ECL/LVPECL/LVDS Dual Differential 2:1 Multiplexer

# MC100ES6056

## NRND

### DATASHEET

**NRND – Not Recommend for New Designs**

**Product Discontinuance Notice – Last Time Buy Expires on (12/23/2013)**

The MC100ES6056 is a dual, fully differential 2:1 multiplexer. The differential data path makes the device ideal for multiplexing low skew clock or other skew sensitive signals. Multiple  $V_{BB}$  pins are provided.


The  $V_{BB}$  pin, an internally generated voltage supply, is available to this device only. For single-ended input conditions, the unused differential input is connected to  $V_{BB}$  as a switching reference voltage.  $V_{BB}$  may also rebias AC coupled inputs. When used, decouple  $V_{BB}$  and  $V_{CC}$  via a 0.01  $\mu\text{F}$  capacitor and limit current sourcing or sinking to 0.5 mA. When not used,  $V_{BB}$  should be left open.

The device features both individual and common select inputs to address both data path and random logic applications.


The 100ES Series contains temperature compensation.

### Features


- 360 ps Typical Propagation Delays
- Maximum Frequency > 3 GHz Typical
- PECL Mode Operating Range:  $V_{CC} = 2.375 \text{ V to } 3.8 \text{ V}$  with  $V_{EE} = 0 \text{ V}$
- ECL Mode Operating Range:  $V_{CC} = 0 \text{ V}$  with  $V_{EE} = -2.375 \text{ V to } -3.8 \text{ V}$
- Open Input Default State
- Separate and Common Select
- Q Output Will Default LOW with Inputs Open or at  $V_{EE}$
- $V_{BB}$  Outputs
- LVDS Input Compatible
- 20-Lead Pb-Free Package Available



**DT SUFFIX  
20-LEAD TSSOP PACKAGE  
CASE 948E-03**




**EJ SUFFIX  
20-LEAD TSSOP PACKAGE  
Pb-FREE PACKAGE  
CASE 948E-03**



**EG SUFFIX  
20-LEAD SOIC PACKAGE  
Pb-FREE PACKAGE  
CASE 751D-07**

| ORDERING INFORMATION |                    |
|----------------------|--------------------|
| Device               | Package            |
| MC100ES6056DT        | TSSOP-20           |
| MC100ES6056DTR2      | TSSOP-20           |
| MC100ES6056EJ        | TSSOP-20 (Pb-Free) |
| MC100ES6056EJR2      | TSSOP-20 (Pb-Free) |
| MC100ES6056EG        | SOIC-20 (Pb-Free)  |
| MC100ES6056EGR2      | SOIC-20 (Pb-Free)  |

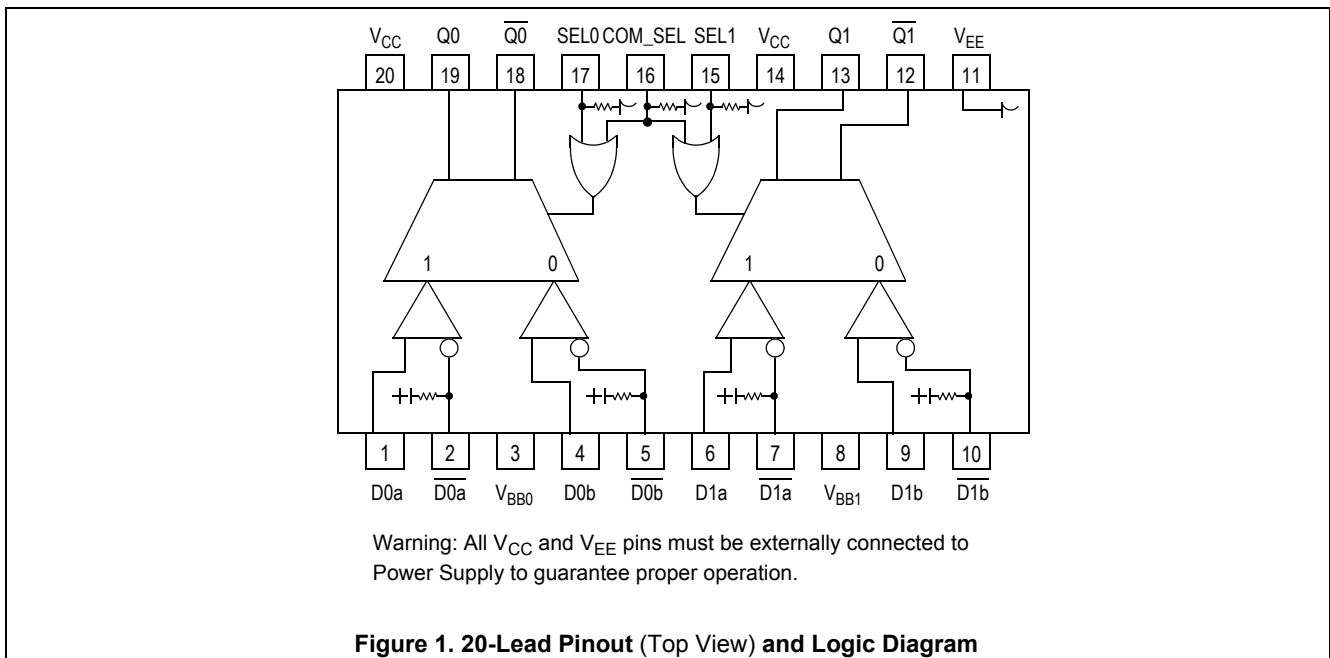

**Figure 1. 20-Lead Pinout (Top View) and Logic Diagram**

**Table 1. Pin Description**

| Pin                                   | Function                 |
|---------------------------------------|--------------------------|
| D0a* – D1a*                           | ECL Input Data a         |
| $\overline{D0a^*} - \overline{D1a^*}$ | ECL Input Data a Invert  |
| D0b* – D1b*                           | ECL Input Data b         |
| $\overline{D0b^*} - \overline{D1b^*}$ | ECL Input Data b Invert  |
| SEL0* – SEL1*                         | ECL Indiv. Select Input  |
| COM_SEL*                              | ECL Common Select Input  |
| V <sub>BB0</sub> , V <sub>BB1</sub>   | Output Reference Voltage |
| Q0 – Q1                               | ECL True Outputs         |
| $\overline{Q0} - \overline{Q1}$       | ECL Inverted Outputs     |
| V <sub>CC</sub>                       | Positive Supply          |
| V <sub>EE</sub>                       | Negative Supply          |

\* Input function will default LOW when left open.

**Table 2. Function Table**

| SEL0 | SEL1 | COM_SEL | Q0, $\overline{Q0}$ | Q1, $\overline{Q1}$ |
|------|------|---------|---------------------|---------------------|
| X    | X    | H       | a                   | a                   |
| L    | L    | L       | b                   | b                   |
| L    | H    | L       | b                   | a                   |
| H    | H    | L       | a                   | a                   |
| H    | L    | L       | a                   | b                   |

**Table 3. General Specifications**

| Characteristics                             |                      | Value         |
|---|----------------------|---------------|
| Internal Input Pulldown Resistor            |                      | 75 k $\Omega$ |
| Internal Input Pullup Resistor              |                      | 75 k $\Omega$ |
| ESD Protection                              | Human Body Model     | > 4 kV        |
|   | Machine Model        | > 400 V       |
|   | Charged Device Model | > 2 kV        |
| Thermal Resistance<br>(Junction-to-Ambient) | 0 LFPM, 20 TSSOP     | 140°C/W       |
|   | 500 LFPM, 20 TSSOP   | 100°C/W       |

Meets or exceeds JEDEC Spec EIA/JESD78 IC Latchup Test

**Table 4. DC Characteristics** ( $V_{CC} = 0\text{ V}$ ,  $V_{EE} = -2.5\text{ V} \pm 5\%$  or  $3.8\text{ V}$  to  $-3.135\text{ V}$ ;  $V_{CC} = 2.5\text{ V} \pm 5\%$  or  $3.135\text{ V}$  to  $3.8\text{ V}$ ,  $V_{EE} = 0\text{ V}$ )

| Symbol    | Characteristics                                 | -40°C           |                 |                 | 0°C to 85°C     |                 |                 | Unit |
|-----------|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|
|           |   | Min             | Typ             | Max             | Min             | Typ             | Max             |      |
| $I_{EE}$  | Power Supply Current                            |                 | 30              | 60              |                 | 30              | 60              | mA   |
| $V_{OH}$  | Output HIGH Voltage <sup>(1)</sup>              | $V_{CC} - 1150$ | $V_{CC} - 1020$ | $V_{CC} - 800$  | $V_{CC} - 1200$ | $V_{CC} - 970$  | $V_{CC} - 750$  | mV   |
| $V_{OL}$  | Output LOW Voltage <sup>(1)</sup>               | $V_{CC} - 1950$ | $V_{CC} - 1620$ | $V_{CC} - 1250$ | $V_{CC} - 2000$ | $V_{CC} - 1680$ | $V_{CC} - 1300$ | mV   |
| $V_{IH}$  | Input HIGH Voltage                              | $V_{CC} - 1165$ |                 | $V_{CC} - 880$  | $V_{CC} - 1165$ |                 | $V_{CC} - 880$  | mV   |
| $V_{IL}$  | Input LOW Voltage                               | $V_{CC} - 1810$ |                 | $V_{CC} - 1475$ | $V_{CC} - 1810$ |                 | $V_{CC} - 1475$ | mV   |
| $V_{BB}$  | Output Reference Voltage                        | $V_{CC} - 1380$ | $V_{CC} - 1290$ | $V_{CC} - 1220$ | $V_{CC} - 1380$ | $V_{CC} - 1290$ | $V_{CC} - 1200$ | mV   |
| $V_{PP}$  | Differential Input Voltage <sup>(2)</sup>       | 0.15            |                 | 1.3             | 0.15            |                 | 1.3             | V    |
| $V_{CMR}$ | Differential Cross Point Voltage <sup>(3)</sup> | $V_{CC} - 2.3$  |                 | $V_{CC} - 0.8$  | $V_{CC} - 2.3$  |                 | $V_{CC} - 0.8$  | V    |
| $I_{IH}$  | Input HIGH Current                              |                 |                 | 150             |                 |                 | 150             | μA   |
| $I_{IL}$  | Input LOW Current                               | -200            |                 |                 | -200            |                 |                 | μA   |

1. Output termination voltage  $V_{TT} = 0\text{ V}$  for  $V_{CC} = 2.5\text{ V}$  operation is supported but the power consumption of the device will increase.
2.  $V_{PP}$  (DC) is the minimum differential input voltage swing required to maintain device functionality.
3.  $V_{CMR}$  (DC) is the crosspoint of the differential input signal. Functional operation is obtained when the crosspoint is within the  $V_{CMR}$  (DC) range and the input swing lies within the  $V_{PP}$  (DC) specification.

**Table 5. Absolute Maximum Ratings<sup>(1)</sup>**


| Symbol       | Characteristic               | Conditions                             | Rating                           | Units    |
|--------------|------------------------------|--|----------------------------------|----------|
| $V_{SUPPLY}$ | Power Supply Voltage         | Difference between $V_{CC}$ & $V_{EE}$ | 3.9                              | V        |
| $V_{IN}$     | Input Voltage                | $V_{CC} - V_{EE} \leq 3.6\text{ V}$    | $V_{CC} + 0.3$<br>$V_{EE} - 0.3$ | V        |
| $I_{OUT}$    | Output Current               | Continuous<br>Surge                    | 50<br>100                        | mA<br>mA |
| $I_{BB}$     | $V_{BB}$ Sink/Source Current |  | ±0.5                             | °C       |
| $T_A$        | Operating Temperature Range  |  | -40 to +85                       | °C       |
| $T_{STG}$    | Storage Temperature Range    |  | -65 to +150                      | °C       |

1. Absolute maximum continuous ratings are those maximum values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation at absolute-maximum-rated conditions is not implied.




**Table 6. AC Characteristics** ( $V_{CC} = 0\text{ V}$ ;  $V_{EE} = -2.5\text{ V} \pm 5\%$  or  $-3.8\text{ V}$  to  $-3.135\text{ V}$ ;  $V_{CC} = 2.5\text{ V} \pm 5\%$  or  $3.135\text{ V}$  to  $3.8\text{ V}$ ;  $V_{EE} = 0\text{ V}$ )<sup>(1)</sup>

| Symbol                           | Characteristics                          | -40°C to 85°C |     |              | Unit |
|----------------------------------|--|---------------|-----|--------------|------|
|                                  |  | Min           | Typ | Max          |      |
| $f_{\max}$                       | Maximum Frequency                        |               | > 3 |              | GHz  |
| $t_{\text{PLH}}, t_{\text{PHL}}$ | Propagation Delay to Output Differential |               |     |              |      |
|                                  | D to Q, $\bar{Q}$                        | 300           | 400 | 500          | ps   |
|                                  | SEL to Q, $\bar{Q}$                      | 300           | 430 | 600          | ps   |
|                                  | COM_SEL to Q, $\bar{Q}$                  | 300           | 490 | 650          | ps   |
| $t_{\text{SKEW}}$                | Skew                                     |               |     |              |      |
|                                  | Output-to-Output <sup>(2)</sup>          |               | 10  | 50           | ps   |
|                                  | Part-to-Part                             |               |     | 200          | ps   |
| $t_{\text{JITTER}}$              | Cycle-to-Cycle Jitter                    |               |     | 1            | ps   |
| $V_{\text{PP}}$                  | Minimum Input Swing                      | 200           | 800 | 1200         | mV   |
| $V_{\text{CMR}}$                 | Differential Cross Point Voltage         | $V_{CC}-2.1$  |     | $V_{CC}-1.1$ | V    |
| $t_r / t_f$                      | Output Rise/Fall Time (20%–80%)          | 70            | 120 | 230          | ps   |

1. Measured using a 750 mV source, 50% duty cycle clock source. All loading with  $50\Omega$  to  $V_{CC}-2.0\text{ V}$ .
2. Skew is measured between outputs under identical transitions. Duty cycle skew is defined only for differential operation when the delays are measured from the cross point of the inputs to the cross point of the outputs.

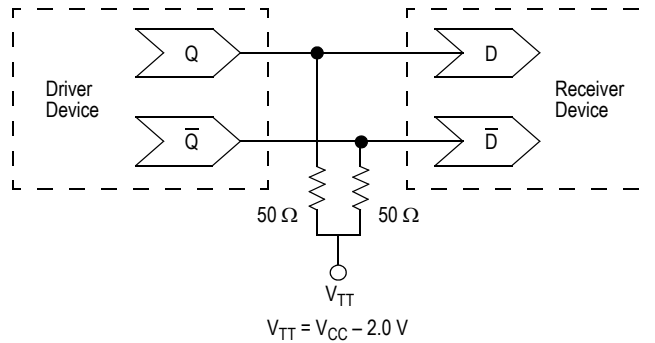**Figure 2. Typical Termination for Output Driver and Device Evaluation**

**PACKAGE DIMENSIONS**

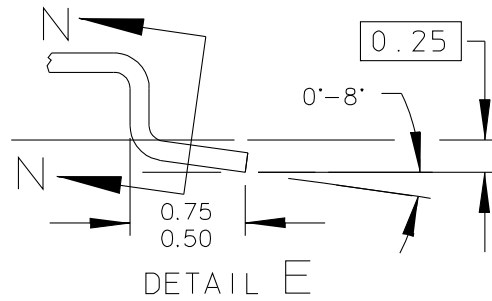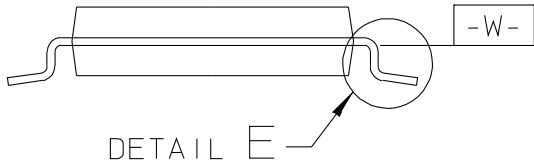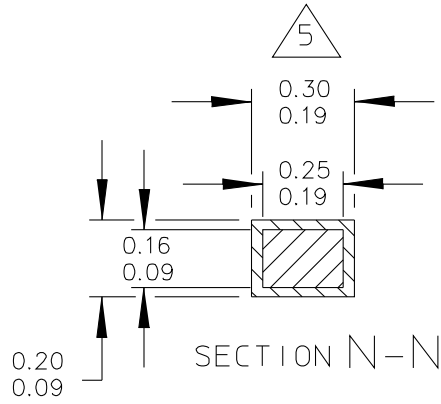

|   |                          |                            |  |
|---|--------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | MECHANICAL OUTLINE       | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br>20 LD TSSOP, PITCH 0.65MM                     | DOCUMENT NO: 98ASH70169A | REV: B                     |  |
|   | CASE NUMBER: 948E-03     | 09 MAR 2005                |  |
|   | STANDARD: JEDEC          |                            |  |

**CASE 948E-03  
ISSUE B  
20-LEAD TSSOP PACKAGE**

**PACKAGE DIMENSIONS**

## NOTES:

1. CONTROLLING DIMENSION: MILLIMETER
2. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M-1982.

3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE.

4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 PER SIDE.

5. DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 TOTAL IN EXCESS OF THE DIMENSION AT MAXIMUM MATERIAL CONDITION.


6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.

7. DIMENSIONS ARE TO BE DETERMINED AT DATUM PLANE -W-.

|   |                          |                            |             |
|---|--------------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | MECHANICAL OUTLINE       | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br>20 LD TSSOP, PITCH 0.65MM                     | DOCUMENT NO: 98ASH70169A |                            | REV: B      |
|   | CASE NUMBER: 948E-03     |                            | 09 MAR 2005 |
|   | STANDARD: JEDEC          |                            |             |

**CASE 948E-03  
ISSUE B  
20-LEAD TSSOP PACKAGE**

**PACKAGE DIMENSIONS**

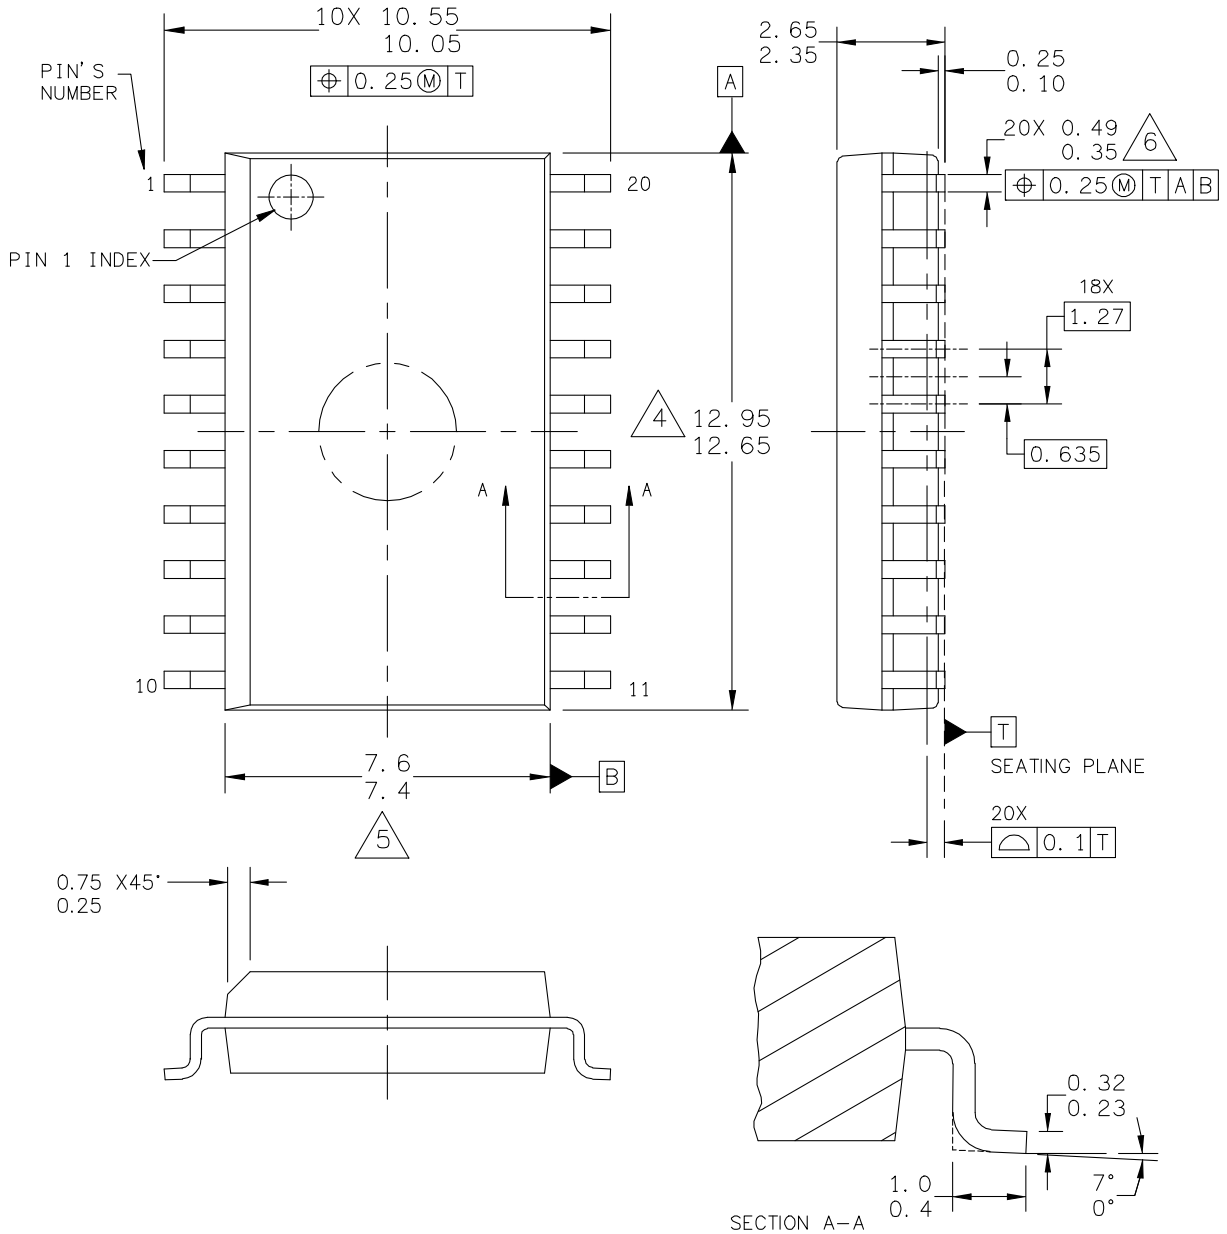

|   |                          |                            |
|---|--------------------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | MECHANICAL OUTLINE       | PRINT VERSION NOT TO SCALE |
| TITLE:<br>20LD SOIC W/B, 1.27 PITCH<br>CASE-OUTLINE     | DOCUMENT NO: 98ASB42343B | REV: J                     |
|   | CASE NUMBER: 751D-07     | 23 MAR 2005                |
|   | STANDARD: JEDEC MS-013AC |                            |

**CASE 751D-07  
ISSUE J  
20-LEAD SOIC PACKAGE**



## PACKAGE DIMENSIONS

### NOTES:

1. DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. DATUMS A AND B TO BE DETERMINED AT THE PLANE WHERE THE BOTTOM OF THE LEADS EXIT THE PLASTIC BODY.
4. THIS DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURRS. MOLD FLASH, PROTRUSION OR GATE BURRS SHALL NOT EXCEED 0.15 MM PER SIDE. THIS DIMENSION IS DETERMINED AT THE PLANE WHERE THE BOTTOM OF THE LEADS EXIT THE PLASTIC BODY.
5. THIS DIMENSION DOES NOT INCLUDE INTER-LEAD FLASH OR PROTRUSIONS. INTER-LEAD FLASH AND PROTRUSIONS SHALL NOT EXCEED 0.25 MM PER SIDE. THIS DIMENSION IS DETERMINED AT THE PLANE WHERE THE BOTTOM OF THE LEADS EXIT THE PLASTIC BODY.
6. THIS DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL NOT CAUSE THE LEAD WIDTH TO EXCEED 0.62 mm.

|   |                          |                            |  |
|---|--------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | MECHANICAL OUTLINE       | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br>20LD SOIC W/B, 1.27 PITCH,<br>CASE OUTLINE    | DOCUMENT NO: 98ASB42343B | REV: J                     |  |
|   | CASE NUMBER: 751D-07     | 23 MAR 2005                |  |
|   | STANDARD: JEDEC MS-013AC |                            |  |

**CASE 751D-07  
ISSUE J  
20-LEAD SOIC PACKAGE**

## Revision History Sheet

| Rev | Table | Page | Description of Change   | Date     |
|-----|-------|------|---|----------|
| 6   |       | 1    | NRND – Not Recommend for New Designs                                  | 12/19/12 |
| 6   |       | 1    | Product Discontinuance Notice – Last Time Buy Expires on (12/23/2013) | 2/26/13  |

## We've Got Your Timing Solution



6024 Silver Creek Valley Road  
San Jose, California 95138

**Sales**  
800-345-7015 (inside USA)  
+408-284-8200 (outside USA)  
Fax: 408-284-2775  
[www.IDT.com/go/contactIDT](http://www.IDT.com/go/contactIDT)

**Technical Support**  
[netcom@idt.com](mailto:netcom@idt.com)  
+480-763-2056

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners.

Copyright 2013. All rights reserved.