

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

PART NUMBER	AMPS	VOLTS	CATALOG NUMBER	DESCRIPTION	UPC CODE	CE LOGO	CSA LOGO	I.R. REQ'D	UL LISTED 717H MINIATURE FUSE LOGO	RoHS LOGO	Pb-FREE LOGO
02200010MXP	.550	250	220010P	FUSE 250V SB PT 2AG Pb-FREE .550	079458 91943	YES	YES	35A 250V AC 10,000A 125V AC	YES	YES	YES

ELECTRICAL CHARACTERISTICS	
CURRENT	BLOW TIME
.9 AMP.	90 SECONDS MAX.
.825 AMP.	15 MINUTES MAX.
.55 AMP.	4 HOURS MIN.

LTR	DATE	REVISION	CHK	APD
A	02/14/05	61615 - RELEASED	PJM	
B	06/20/06	84938D-DLT 580219 & 580460 ADD C580933	PJM	

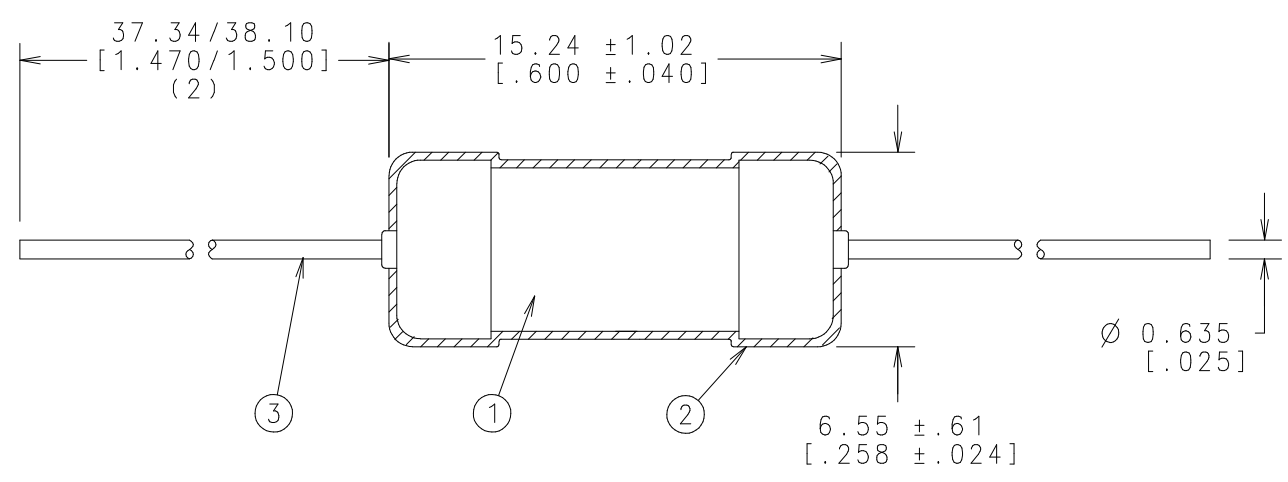

NOTE:

- ASSEMBLE SLEEVE ON FUSE USING SERPENTINE HEATERS TO DIRECT A CONTINUOUS FLOW OF HOT AIR ON SLEEVE UNTIL SHRUNK. SLEEVE MUST BE CLEAR, FREE OF ANY DISCOLORATION AFTER SHRINKING.
- COLD RESISTANCE LIMITS: .416Ω - .574Ω
- CAP TO LEAD WELD SHALL WITHSTAND A PULL OF 10 LBS. WITHOUT SEPARATING.

FUSE WILL WITHSTAND

- 29.4A., 1KV., 10x1000 MICRO SECONDS, 200 HITS @ 1 MINUTE INTERVAL.
- 38.9A., 2.1 KV., .2x1000 MICRO SECONDS, 200 HITS @ 1 MINUTE INTERVAL.

- PACK 1000 FUSES IN BOX 580460, SEAL WITH 088120 TAPE.
- LABEL TO BE APPLIED TO THE END OF THE BOX.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
-	C580933	CARTON	1	EAD
3	895-195	SLEEVE	1000	EA
2	082706	LEAD WIRE	.482	LB
1	220010W-P	FUSE SUB-ASSEMBLY	1000	EA

BILL OF MATERIAL			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.			
○	DENOTES CRITICAL CHARACTERISTICS.		
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE		
ⓈT	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.		
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.		
COPIES TO	MATH SPEC		
1 9 18	FINISH		
2 10 19			
3 12 20			
4 13 21	DRW	DATE 02/14/05	SCALE 4:1
5 14 23	CHK	DATE	SUPER DR
6 15 33	APPD	DATE	FINISH GOOD WT
7 16 43	GRAMS/PIECE		
8 17 93			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
TWO PLACE DEC ±.25[.01]		FRACTION ±	
THREE PLACE DEC ±.100[.004]		ANGULAR ±1°	
3RD ANGLE PROJECTION			
TITLE .550A "M" PACKED 2AG SLO-BLO WELDED LEADS WITH SHRINK TUBING Pb-FREE			

(1P)PART No 02200010MXP

(Q) QTY 1000 CATALOG/PREVIOUS No: 220010P

(11) LOT NO TEST 2AG

0 79458 91943 1

FUSE 250V SB PT 2AG Pb-FREE .550A 02/02/05 MM/DD/YY

LITTELFUSE INC. COUNTRY OF ORIGIN CHINA

RoHS 電子機器用

Pb

UL LISTED 717H MINIATURE FUSE

35A 250V AC 10,000A 125V AC

CE

NOTE: LABEL ILLUSTRATION(S) IS FOR REFERENCE ONLY. THE ACTUAL COPY AND REGULATORY MARKINGS WILL VARY BY THE INDIVIDUAL PART NUMBER. SEE CHART.

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED