

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

GENERAL DESCRIPTION

The DS1688/DS1691 are real-time clocks (RTCs) designed as successors to the industry standard DS1285, DS1385, DS1485, and DS1585 PC real-time clocks. These devices provide the industry standard DS1285 clock function with the new feature of either +3.0V or +5.0V operation and automatic backup and write protection to an external SRAM. The DS1688 also incorporates a number of enhanced features including a silicon serial number, power-on/off control circuitry, 114 bytes of user NV SRAM, power-on elapsed timer, and power-cycle counter.

PIN CONFIGURATIONS

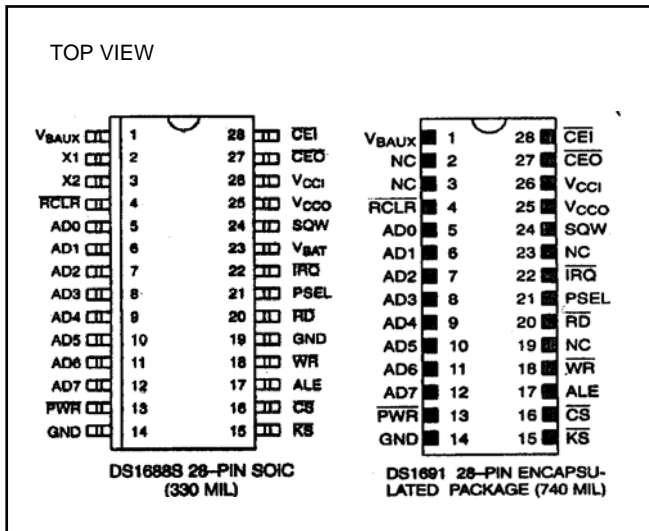

FEATURES

Incorporates Industry Standard DS1287 PC Clock Plus Enhanced Features:

- +3V or +5V Operation
- 64-Bit Silicon Serial Number
- 64-Bit Customer Specific ROM or Additional Serial Number Available
- Power Control Circuitry Supports System Power-On from Date/Time Alarm or Key Closure
- Automatic Battery Backup and Write Protection to External SRAM
- Crystal Select Bit Allows RTC to Operate with 6Pf or 12.5Pf Crystal
- 114 Bytes User NV RAM
- Auxiliary Battery Input
- RAM Clear Input
- Century Register
- 32kHz Output for Power Management
- 32-Bit V_{CC} Powered Elapsed Time Counter
- 32-Bit V_{BAT} Powered Elapsed Time Counter
- 16-Bit Power-Cycle Counter
- Compatible with Existing BIOS for Original DS1287 Functions
- Available as IC (DS1688) or Stand-Alone Module with Embedded Battery and Crystal (DS1691)
- Timekeeping Algorithm Includes Leap Year Compensation Valid Up to 2100

ORDERING INFORMATION

PART	TEMP RANGE	VOLTAGE (V)	PIN-PACKAGE	TOP MARK*
DS1688S	0°C to +70°C	3 to 5	28 SO (0.330")	DS1688S
DS1688S+	0°C to +70°C	3 to 5	28 SO (0.330")	DS1688S
DS1691	0°C to +70°C	3 to 5	28 EDIP (0.740")	DS1691

+ Denotes a lead(Pb)-free/RoHS-compliant device.

+ A "+" anywhere on the top mark denotes a lead(Pb)-free/RoHS-compliant device.

DETAILED DESCRIPTION

Each DS1688/DS1691 is individually manufactured with a unique 64-bit serial number as well as an additional 64-bit customer-specific ROM or serial number. The serial number is programmed and tested at Dallas to ensure that no two devices are alike. The serial number can be used to electronically identify a system for purposes such as establishment of a network node address or for maintenance tracking. Customers can reserve blocks of available numbers from Dallas Semiconductor.

The serialized RTCs also incorporate power-control circuitry, which allows the system to be powered on via an external stimulus, such as a keyboard or by a time and date (wake up) alarm. The $\overline{\text{PWR}}$ output pin can be triggered by one or either of these events, and can be used to turn on an external power supply. The $\overline{\text{PWR}}$ pin is under software control, so that when a task is complete, the system power can then be shut down.

The DS1688/DS1691 incorporate a power-on elapsed time counter, a power-on cycle counter, and a battery powered continuous counter. These three counters provide valuable information for maintenance and warranty requirements.

Automatic backup and write protection for an external SRAM is provided through the V_{CCO} and $\overline{\text{CEO}}$ pins. The lithium energy source used to permanently power the RTC is also used to retain RAM data in the absence of V_{CC} power through the V_{CCO} pin. The chip enable output to RAM ($\overline{\text{CEO}}$) is controlled during power transients to prevent data corruption.

The DS1688 is a clock/calendar chip with the features described above. An external crystal and battery are the only components required to maintain time-of-day and memory status in the absence of power. The DS1691 incorporates the DS1688 chip, a 32.768kHz crystal, and a lithium battery in a complete, self-contained timekeeping module. The entire unit is fully tested at Dallas Semiconductor such that a minimum of 10 years of timekeeping and data retention in the absence of V_{CC} is guaranteed.

For a complete description of operating conditions, electrical characteristics, bus timing, and pin descriptions other than the SQW output, refer to the DS1689/DS1693 data sheet, available online at www.maxim-ic.com/DS1689.

PIN DESCRIPTION

PIN		NAME	FUNCTION
SO	EDIP		
1	1	V _{BAUX}	Auxiliary Battery Supply
2, 3	—	X1, X2	Crystal Input, Crystal Output
4	4	RCLR	Active-Low RAM Clear Input
5–12	5–12	AD0–AD7	Muxed Address/Data Bus
13	13	PWR	Active-Low Power-On Interrupt Output
14, 19	14	GND	Ground
15	15	K \bar{S}	Active-Low Kickstart Input
16	16	C \bar{S}	Active-Low Chip Select Input
17	17	ALE	Address Strobe
18	18	W \bar{R}	Active-Low Write Data Strobe
20	20	R \bar{D}	Active-Low Read Data Strobe
21	21	PSEL	+3V or +5V Power Select
22	22	IRQ	Active-Low Interrupt Request Output
23	—	V _{BAT}	Battery + Supply
24	24	SQW	Square-Wave Output. This signal functions identical to the DS1689/DS1693 with an exception occurring at power-up. A 32kHz square wave is output on this pin, t _{REC} , after a power-up condition has been detected. This condition sets the following bits, enabling the 32kHz output: DV1 = 1, SQWE = 1, and E32K = 1. The square wave is output on this pin if either SQWE = 1 or E32K = 1.
25	25	V _{CCO}	RAM Power-Supply Output
26	26	V _{CCI}	+3V or +5V Main Supply
27	27	C $\bar{E}O$	Active-Low RAM Chip Enable Out
28	28	C $\bar{E}I$	Active-Low RAM Chip Enable In
—	2, 3, 19, 23	N.C.	No Connection

PACKAGE INFORMATION

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.
28 SO	F28+3	21-0251
28 PDIP	P28-6	21-0044
28 EDIP	MDP28-2	21-0241